


settore elettrico > capicorda preisolati, puntalini e capicorda di potenza > capicorda potenza

Capicorda di potenza

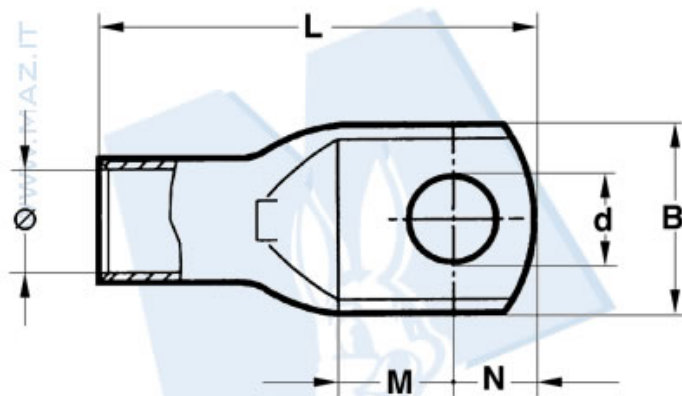

Codice Nr.	Sez. conduttore rigido	Sez. conduttore flessib.	$\tilde{A}_s$ Vite mm	$\tilde{A}_s$	B	M	N	L	d
A 03 - M 3	0.25 $\tilde{A}$ · 1.5	0.25 $\tilde{A}$ · 1.5	3	1.8	6.0	4.5	3.5	16.0	3.2
A 03 - M 3.5	0.25 $\tilde{A}$ · 1.5	0.25 $\tilde{A}$ · 1.5	3.5	1.8	6.5	4.5	3.5	16.0	3.7
A 03 - M 4	0.25 $\tilde{A}$ · 1.5	0.25 $\tilde{A}$ · 1.5	4	1.8	6.5	5.0	4.0	17.0	4.3
A 03 - M 5	0.25 $\tilde{A}$ · 1.5	0.25 $\tilde{A}$ · 1.5	5	1.8	7.5	5.5	4.5	18.0	5.3
A 03 - M 6	0.25 $\tilde{A}$ · 1.5	0.25 $\tilde{A}$ · 1.5	6	1.8	9.0	6.0	5.0	19.0	6.4
A 06 - M 3	1.5 $\tilde{A}$ · 2.5	1.5 $\tilde{A}$ · 2.5	3	2.4	6.0	4.5	3.5	17.0	3.2
A 06 - M 3.5	1.5 $\tilde{A}$ · 2.5	1.5 $\tilde{A}$ · 2.5	3.5	2.4	6.5	4.5	3.5	17.0	3.7
A 06 - M 4	1.5 $\tilde{A}$ · 2.5	1.5 $\tilde{A}$ · 2.5	4	2.4	7.5	5.0	4.0	18.0	4.3
A 06 - M 5	1.5 $\tilde{A}$ · 2.5	1.5 $\tilde{A}$ · 2.5	5	2.4	8.5	5.5	4.5	19.0	5.3
A 06 - M 6	1.5 $\tilde{A}$ · 2.5	1.5 $\tilde{A}$ · 2.5	6	2.4	9.0	6.0	5.0	20.0	6.4
A 06 - M 8	1.5 $\tilde{A}$ · 2.5	1.5 $\tilde{A}$ · 2.5	8	2.4	12.0	9.0	8.0	26.0	8.4
A 1 - M 3	4 $\tilde{A}$ · 6	4 $\tilde{A}$ · 6	3	3.6	7.5	4.5	3.5	20.5	3.2
A 1 - M 3.5	4 $\tilde{A}$ · 6	4 $\tilde{A}$ · 6	3.5	3.6	7.5	4.5	3.5	20.5	3.7
A 1 - M 4	4 $\tilde{A}$ · 6	4 $\tilde{A}$ · 6	4	3.6	8.0	5.0	4.0	21.5	4.3
A 1 - M 5	4 $\tilde{A}$ · 6	4 $\tilde{A}$ · 6	5	3.6	9.0	6.5	6.0	25.0	5.3
A 1 - M 6	4 $\tilde{A}$ · 6	4 $\tilde{A}$ · 6	6	3.6	11.0	7.0	6.0	25.5	6.4
A 1 - M 8	4 $\tilde{A}$ · 6	4 $\tilde{A}$ · 6	8	3.6	14.0	9.0	8.0	29.5	8.4
A 1 - M 10	4 $\tilde{A}$ · 6	4 $\tilde{A}$ · 6	10	3.6	16.0	11.0	10.0	34.0	10.5
A 2 - M 4	10	10	4	4.6	10.0	5.0	4.0	22.5	4.3
A 2 - M 5	10	10	5	4.6	10.0	6.5	6.0	26.0	5.3
A 2 - M 6	10	10	6	4.6	11.0	7.0	6.0	26.5	6.4
A 2 - M 8	10	10	8	4.6	15.0	9.0	8.0	30.5	8.4
A 2 - M 10	10	10	10	4.6	18.0	11.0	10.0	34.5	10.5
A 2 - M 12	10	10	12	4.6	19.0	14.0	12.0	39.5	13.2

Per sezioni superiori a quanto in tabella contattare il nostro ufficio commerciale