


settore elettrico > capicorda preisolati, puntalini e capicorda di potenza > capicorda potenza

Capicorda di potenza

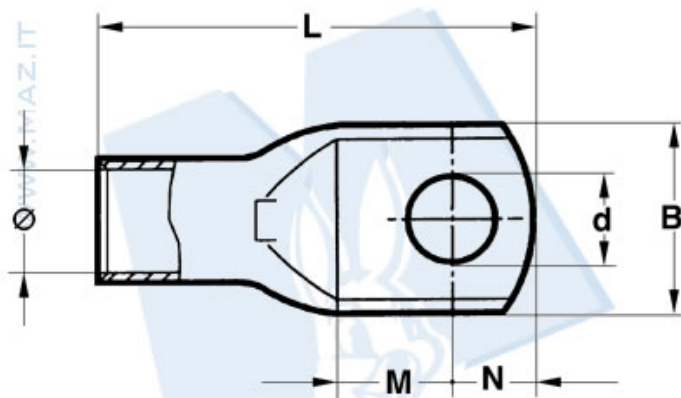

Codice Nr.	Sez. conduttore rigido	Sez. conduttore flessib.	$\tilde{A}_v$ Vite mm	$\tilde{A}_s$	B	M	N	L	d
A 3 - M 4	16	16	4	5.8	11.5	5.0	4.0	25.5	4.3
A 3 - M 5	16	16	5	5.8	11.5	6.5	6.0	29.0	5.3
A 3 - M 6	16	16	6	5.8	11.5	7.0	6.0	29.5	6.4
A 3 - M 8	16	16	8	5.8	15.0	9.0	8.0	33.5	8.4
A 3 - M 10	16	16	10	5.8	18.0	11.0	10.0	37.5	10.5
A 3 - M 12	16	16	12	5.8	20.0	14.0	12.0	42.5	13.2
A 5 - M 4	25	25	4	7.0	14.0	5.0	4.0	28.0	4.3
A 5 - M 5	25	25	5	7.0	14.0	6.5	6.0	31.5	5.3
A 5 - M 6	25	25	6	7.0	14.0	7.0	6.0	32.0	6.4
A 5 - M 8	25	25	8	7.0	15.0	9.0	8.0	36.0	8.4
A 5 - M 10	25	25	10	7.0	18.0	11.0	10.0	40.0	10.5
A 5 - M 12	25	25	12	7.0	21.0	14.0	12.0	45.0	13.2
A 7 - M 5	35	25 - 35	5	8.9	17.0	6.5	6.0	34.0	5.3
A 7 - M 6	35	25 - 35	6	8.9	17.0	7.0	6.0	34.5	6.4
A 7 - M 8	35	25 - 35	8	8.9	17.0	9.0	8.0	38.5	8.4
A 7 - M 10	35	25 - 35	10	8.9	19.0	11.0	10.0	42.5	10.5
A 7 - M 12	35	25 - 35	12	8.9	21.0	14.0	12.0	47.5	13.2
A 10 - M 6	50	35 - 50	6	10.0	19.0	8.0	7.0	40.5	6.4
A 10 - M 8	50	35 - 50	8	10.0	19.0	9.0	8.0	42.5	8.4
A 10 - M 10	50	35 - 50	10	10.0	20.0	11.0	10.0	46.5	10.5
A 10 - M 12	50	35 - 50	12	10.0	21.0	14.0	12.0	51.5	13.2
A 10 - M 14	50	35 - 50	14	10.0	25.0	16.0	14.0	55.5	15.0
A 10 - M 16	50	35 - 50	16	10.0	26.0	18.0	16.0	59.5	17.0
A 14 - M 6	70	50 - 70	6	11.3	21.0	8.0	7.0	44.0	6.4
A 14 - M 8	70	50 - 70	8	11.3	21.0	9.0	8.0	46.0	8.4
A 14 - M 10	70	50 - 70	10	11.3	21.0	11.0	10.0	50.0	10.5
A 14 - M 12	70	50 - 70	12	11.3	22.0	14.0	12.0	55.0	13.2
A 14 - M 14	70	50 - 70	14	11.3	25.0	16.0	14.0	59.0	15.0
A 14 - M 16	70	50 - 70	16	11.3	26.0	18.0	16.0	63.0	17.0

Per sezioni superiori a quanto in tabella contattare il nostro ufficio commerciale