


articoli di fissaggio > rivetti a strappo in alluminio > rivetti a strappo in alluminio

Rivetti in lega di alluminio AlMg 3.5

Con chiodo in acciaio zincato

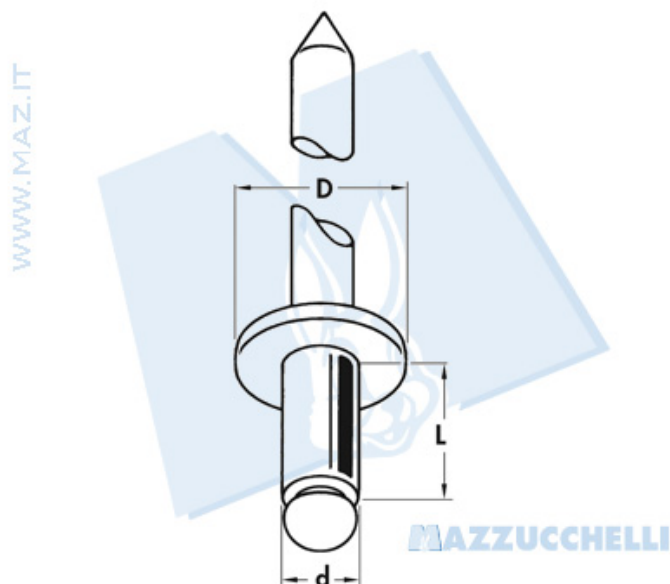

		d	L	D		
Kg	Kg				mm	mm min - max
35 (343 N)	45 (441 N)	2.4	6	5	2.5	0.5 Æ 3
35 (343 N)	45 (441 N)	2.4	8	5	2.5	3 Æ 5
35 (343 N)	45 (441 N)	2.4	10	5	2.5	5 Æ 7
35 (343 N)	45 (441 N)	2.4	12	5	2.5	7 Æ 9
65 (637 N)	90 (882 N)	3	5	6	3.1	0.5 Æ 2
65 (637 N)	90 (882 N)	3	6	6	3.1	1 Æ 3
65 (637 N)	90 (882 N)	3	7	6	3.1	2 Æ 4
65 (637 N)	90 (882 N)	3	8	6	3.1	3 Æ 5
65 (637 N)	90 (882 N)	3	9	6	3.1	4 Æ 6
65 (637 N)	90 (882 N)	3	10	6	3.1	5 Æ 7
65 (637 N)	90 (882 N)	3	11	6	3.1	6 Æ 8
65 (637 N)	90 (882 N)	3	12	6	3.1	7 Æ 9
65 (637 N)	90 (882 N)	3	14	6	3.1	9 Æ 11
65 (637 N)	90 (882 N)	3	16	6	3.1	11 Æ 13
65 (637 N)	90 (882 N)	3	18	6	3.1	13 Æ 15
70 (686 N)	100 (980 N)	3.2	5	6.5	3.3	0.5 Æ 2
70 (686 N)	100 (980 N)	3.2	6	6.5	3.3	1 Æ 3
70 (686 N)	100 (980 N)	3.2	7	6.5	3.3	2 Æ 4
70 (686 N)	100 (980 N)	3.2	8	6.5	3.3	3 Æ 5
70 (686 N)	100 (980 N)	3.2	9	6.5	3.3	4 Æ 6
70 (686 N)	100 (980 N)	3.2	10	6.5	3.3	5 Æ 7
70 (686 N)	100 (980 N)	3.2	11	6.5	3.3	6 Æ 8
70 (686 N)	100 (980 N)	3.2	12	6.5	3.3	7 Æ 9
70 (686 N)	100 (980 N)	3.2	14	6.5	3.3	9 Æ 11
70 (686 N)	100 (980 N)	3.2	16	6.5	3.3	11 Æ 13
70 (686 N)	100 (980 N)	3.2	18	6.5	3.3	13 Æ 15

*Disponibile solo su richiesta e per quantitativi minimi di 30.000 pz.