


articoli di fissaggio > rivetti a strappo in alluminio > rivetti a strappo in alluminio

Rivetti in lega di alluminio AlMg 3.5

Con chiodo in acciaio zincato

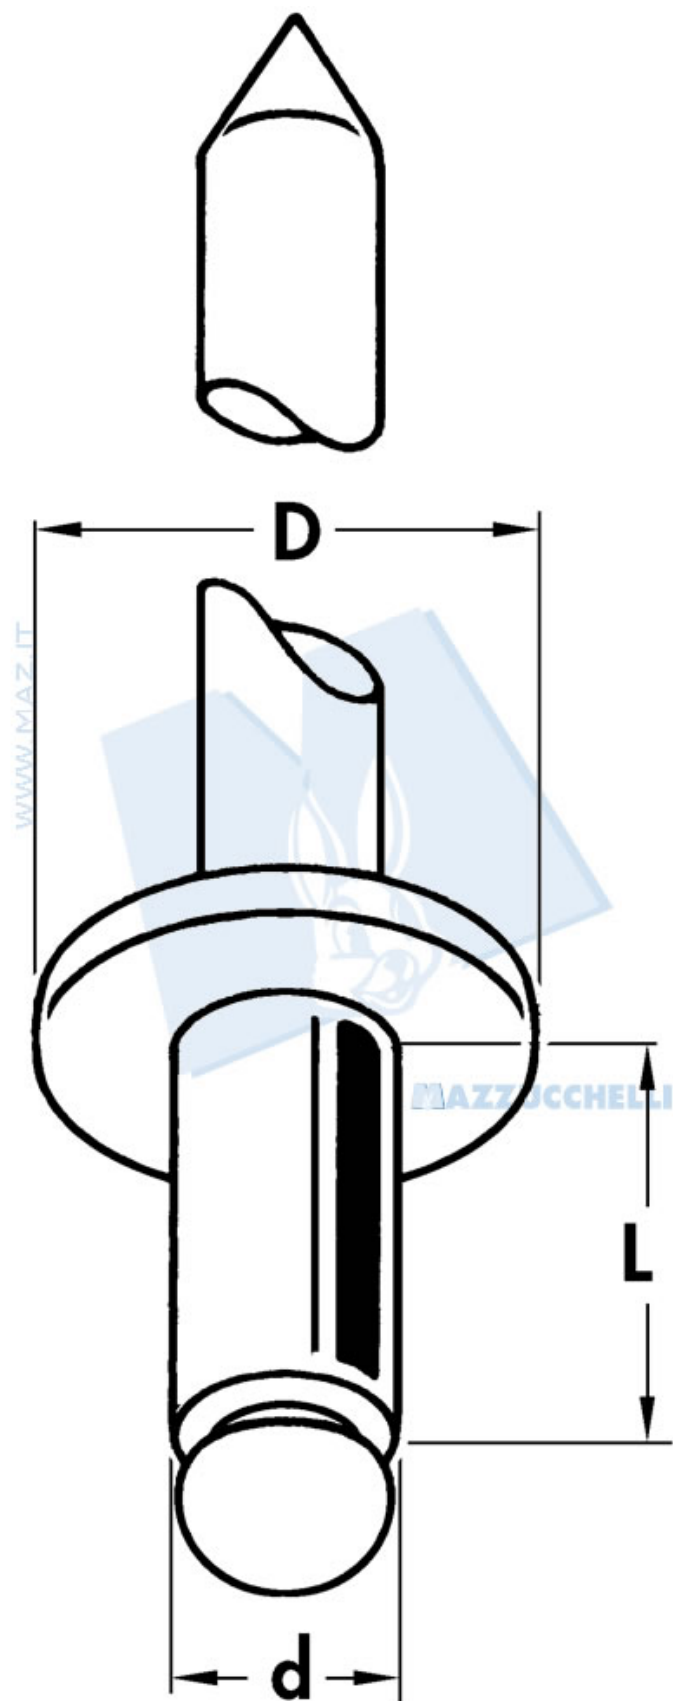

		d	L	D	 mm	 mm min ± max
75 (735 N)	110 (1078 N)	3.4	5	7	3.5	0.5 Æ 2
75 (735 N)	110 (1078 N)	3.4	6	7	3.5	1 Æ 3
75 (735 N)	110 (1078 N)	3.4	7	7	3.5	2 Æ 4
75 (735 N)	110 (1078 N)	3.4	8	7	3.5	3 Æ 5
75 (735 N)	110 (1078 N)	3.4	9	7	3.5	4 Æ 6
75 (735 N)	110 (1078 N)	3.4	10	7	3.5	5 Æ 7
75 (735 N)	110 (1078 N)	3.4	11	7	3.5	6 Æ 8

		d	L	D		
75 (735 N)	110 (1078 N)	3.4	12	7	3.5	7 Æ 9
75 (735 N)	110 (1078 N)	3.4	14	7	3.5	9 Æ 11
75 (735 N)	110 (1078 N)	3.4	16	7	3.5	11 Æ 13
75 (735 N)	110 (1078 N)	3.4	18	7	3.5	13 Æ 15
75 (735 N)	110 (1078 N)	*3.4	20	7	3.5	15 Æ 17
130 (1274 N)	185 (1813 N)	4	5	8	4.1	0.5 Æ 1.5
130 (1274 N)	185 (1813 N)	4	6	8	4.1	1.5 Æ 2.5
130 (1274 N)	185 (1813 N)	4	7	8	4.1	2.5 Æ 3.5
130 (1274 N)	185 (1813 N)	4	8	8	4.1	3.5 Æ 4.5
130 (1274 N)	185 (1813 N)	4	9	8	4.1	4.5 Æ 5.5
130 (1274 N)	185 (1813 N)	4	10	8	4.1	5.5 Æ 6.5
130 (1274 N)	185 (1813 N)	4	11	8	4.1	6.5 Æ 7.5
130 (1274 N)	185 (1813 N)	4	12	8	4.1	7.5 Æ 8.5
130 (1274 N)	185 (1813 N)	4	14	8	4.1	8.5 Æ 10.5
130 (1274 N)	185 (1813 N)	4	16	8	4.1	10.5 Æ 12.5
130 (1274 N)	185 (1813 N)	4	18	8	4.1	12.5 Æ 14.5
130 (1274 N)	185 (1813 N)	4	20	8	4.1	14.5 Æ 16.5
130 (1274 N)	185 (1813 N)	4	22	8	4.1	16.5 Æ 18.5
130 (1274 N)	185 (1813 N)	4	24	8	4.1	18.5 Æ 20.5
130 (1274 N)	185 (1813 N)	4	26	8	4.1	20.5 Æ 22.5
130 (1274 N)	185 (1813 N)	4	28	8	4.1	22.5 Æ 24.5
130 (1274 N)	185 (1813 N)	4	30	8	4.1	24.5 Æ 26.5

*Disponibile solo su richiesta e per quantitativi minimi di 30.000 pz.