


articoli di fissaggio > rivetti a strappo in alluminio > rivetti a strappo in alluminio

Rivetti in lega di alluminio AlMg 5

Con chiodo in acciaio zincato

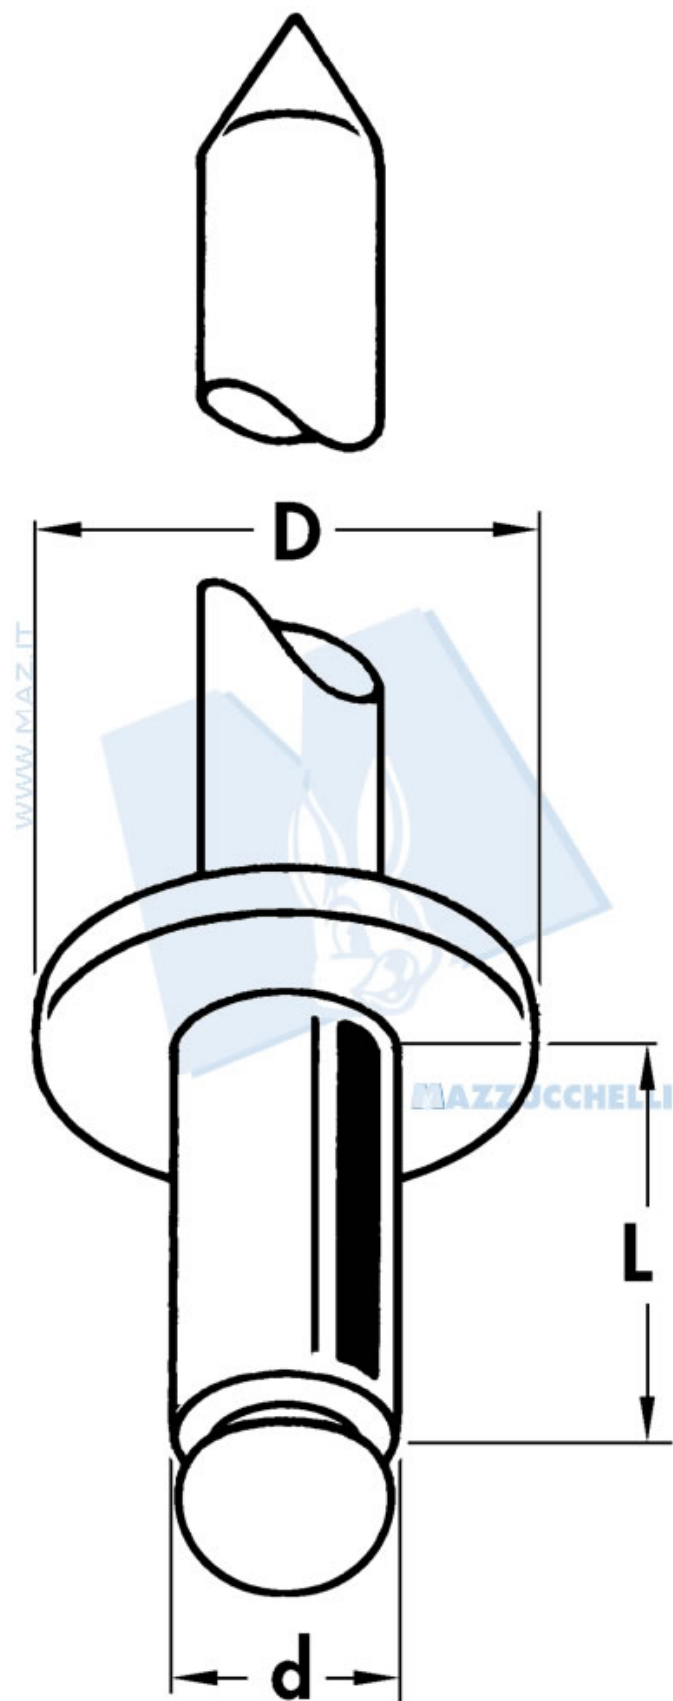

 Kg	 Kg	d	L	D	 mm	 mm min ± max
280 (2744 N)	433 (4341 N)	6	8	12	6.1	2 Æ 3
280 (2744 N)	433 (4341 N)	6	10	12	6.1	3 Æ 5
280 (2744 N)	433 (4341 N)	6	12	12	6.1	5 Æ 7
280 (2744 N)	433 (4341 N)	6	15	12	6.1	7 Æ 10
280 (2744 N)	433 (4341 N)	6	18	12	6.1	10 Æ 13
280 (2744 N)	433 (4341 N)	6	22	12	6.1	13 Æ 17
280 (2744 N)	433 (4341 N)	6	26	12	6.1	17 Æ 21

		d	L	D	 mm	 mm min + max
280 (2744 N)	433 (4341 N)	6	30	12	6.1	21 Å· 25
280 (2744 N)	433 (4341 N)	6	35	12	6.1	25 Å· 30
280 (2744 N)	433 (4341 N)	6	40	12	6.1	30 Å· 35
380 (3724 N)	632 (6193 N)	6.4	8	12	6.5	2 Å· 3
380 (3724 N)	632 (6193 N)	6.4	10	12	6.5	3 Å· 5
380 (3724 N)	632 (6193 N)	6.4	12	12	6.5	5 Å· 7
380 (3724 N)	632 (6193 N)	6.4	15	12	6.5	7 Å· 10
380 (3724 N)	632 (6193 N)	6.4	18	12	6.5	10 Å· 13
380 (3724 N)	632 (6193 N)	6.4	22	12	6.5	13 Å· 17
380 (3724 N)	632 (6193 N)	6.4	26	12	6.5	17 Å· 21
380 (3724 N)	632 (6193 N)	6.4	30	12	6.5	21 Å· 25
380 (3724 N)	632 (6193 N)	6.4	35	12	6.5	25 Å· 30
380 (3724 N)	632 (6193 N)	6.4	40	12	6.5	30 Å· 35
677 (6634 N)	979 (9594 N)	7.8	15	14	8	4 Å· 9.5
677 (6634 N)	979 (9594 N)	7.8	18	14	8	9.5 Å· 12.5
677 (6634 N)	979 (9594 N)	7.8	22	14	8	12.5 Å· 16.5
677 (6634 N)	979 (9594 N)	7.8	26	14	8	16.5 Å· 20.5
677 (6634 N)	979 (9594 N)	7.8	30	14	8	20.5 Å· 24.5
677 (6634 N)	979 (9594 N)	7.8	35	14	8	24.5 Å· 29.5
677 (6634 N)	979 (9594 N)	7.8	40	14	8	29.5 Å· 34.5