


articoli di fissaggio > rivetti a strappo in alluminio > rivetti a strappo in alluminio

Rivetti a testa svasata in lega di alluminio AlMg

3.5

Con chiodo in acciaio zincato

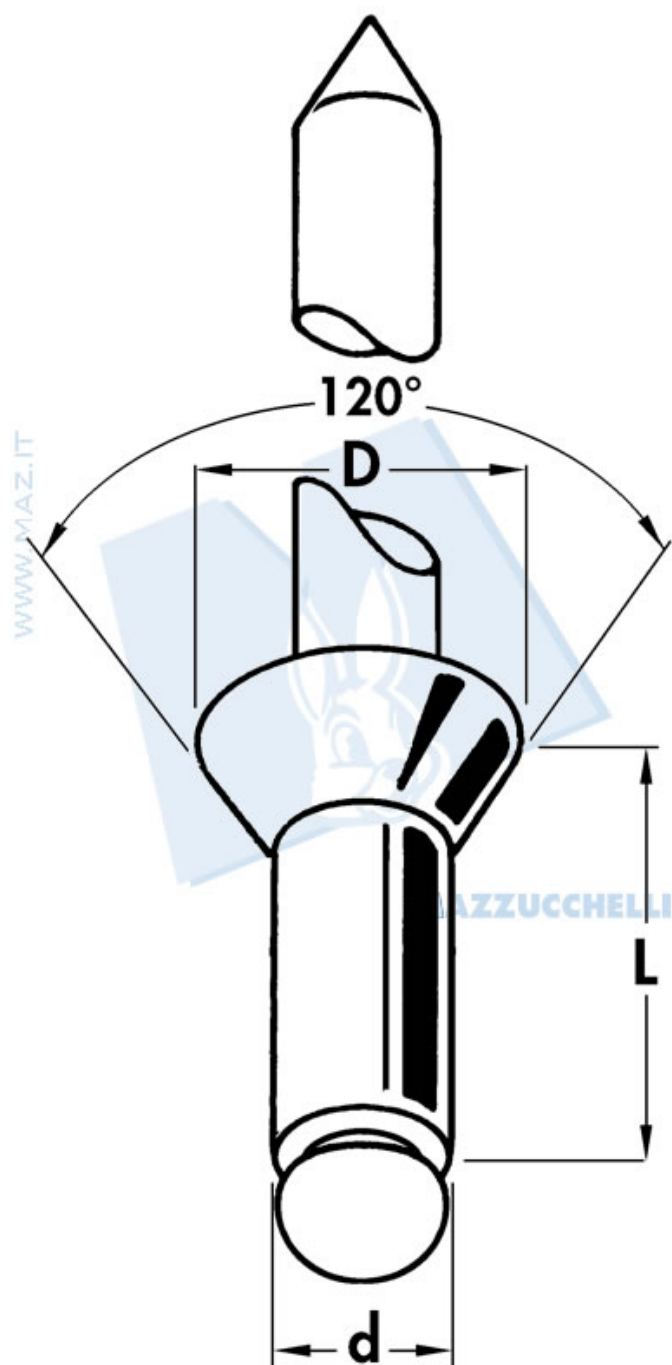

		d	L	D		
70 (686 N)	100 (980 N)	3.2	7	6.5	3.3	2 Å· 4
70 (686 N)	100 (980 N)	3.2	9	6.5	3.3	4 Å· 6
70 (686 N)	100 (980 N)	3.2	11	6.5	3.3	6 Å· 8
70 (686 N)	100 (980 N)	3.2	13	6.5	3.3	8 Å· 10
130 (1274 N)	185 (1813 N)	4	7	8	4.1	3 Å· 4
130 (1274 N)	185 (1813 N)	4	9	8	4.1	4 Å· 6
130 (1274 N)	185 (1813 N)	4	11	8	4.1	6 Å· 8
130 (1274 N)	185 (1813 N)	4	12	8	4.1	8 Å· 9
130 (1274 N)	185 (1813 N)	4	14	8	4.1	9 Å· 11
130 (1274 N)	185 (1813 N)	4	16	8	4.1	11 Å· 13
130 (1274 N)	185 (1813 N)	4	18	8	4.1	13 Å· 15
130 (1274 N)	185 (1813 N)	4	20	8	4.1	15 Å· 17
223 (2185 N)	304 (2979 N)	4.8	7	10	5	3 Å· 4
223 (2185 N)	304 (2979 N)	4.8	9	10	5	4 Å· 5
223 (2185 N)	304 (2979 N)	4.8	11	10	5	5 Å· 7
223 (2185 N)	304 (2979 N)	4.8	12	10	5	7 Å· 8
223 (2185 N)	304 (2979 N)	4.8	14	10	5	8 Å· 10
223 (2185 N)	304 (2979 N)	4.8	16	10	5	10 Å· 12
223 (2185 N)	304 (2979 N)	4.8	18	10	5	12 Å· 14
223 (2185 N)	304 (2979 N)	4.8	20	10	5	14 Å· 16