


articoli di fissaggio > rivetti a strappo in alluminio > rivetti a strappo in alluminio

Rivetti tutto alluminio -

Boccola AlMg 2 Chiodo AlMg 5

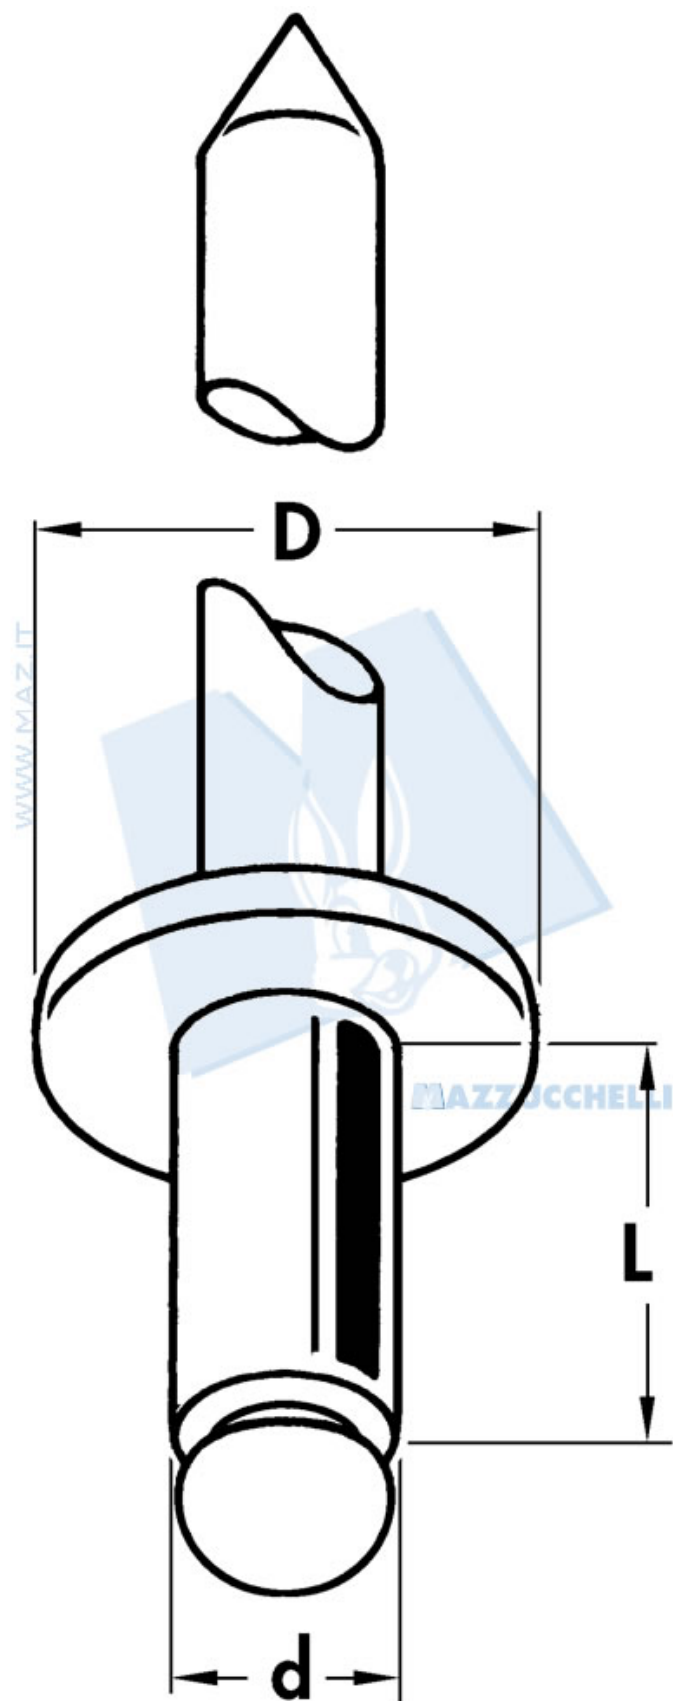

		d	L	D	 mm	 mm min ÷ max
44 (431 N)	76 (744 N)	3.2	6	6.5	3.3	0.5 Æ 3
44 (431 N)	76 (744 N)	3.2	8	6.5	3.3	3 Æ 5
44 (431 N)	76 (744 N)	3.2	10	6.5	3.3	5 Æ 7
44 (431 N)	76 (744 N)	3.2	12	6.5	3.3	7 Æ 9
89 (872 N)	128 (1254 N)	4	6	8	4.1	0.5 Æ 2.5
89 (872 N)	128 (1254 N)	4	8	8	4.1	2.5 Æ 4.5
89 (872 N)	128 (1254 N)	4	10	8	4.1	4.5 Æ 6.5

		d	L	D	 mm	 mm min ÷ max
89 (872 N)	128 (1254 N)	4	12	8	4.1	6.5 Æ 8.5
89 (872 N)	128 (1254 N)	4	14	8	4.1	8.5 Æ 10.5
89 (872 N)	128 (1254 N)	4	16	8	4.1	10.5 Æ 12.5
89 (872 N)	128 (1254 N)	4	18	8	4.1	12.5 Æ 14.5
109 (1068 N)	157 (1538 N)	4.8	8	10	5	2 Æ 4
109 (1068 N)	157 (1538 N)	4.8	10	10	5	4 Æ 6
109 (1068 N)	157 (1538 N)	4.8	12	10	5	6 Æ 8
109 (1068 N)	157 (1535 N)	4.8	14	10	5	8 Æ 10
109 (1068 N)	157 (1538 N)	4.8	16	10	5	10 Æ 12
109 (1068 N)	157 (1538 N)	4.8	18	10	5	12 Æ 14