


articoli di fissaggio > rivetti a strappo in rame > rivetti a strappo in rame

Rivetti in rame naturale

Con chiodo in acciaio zincato

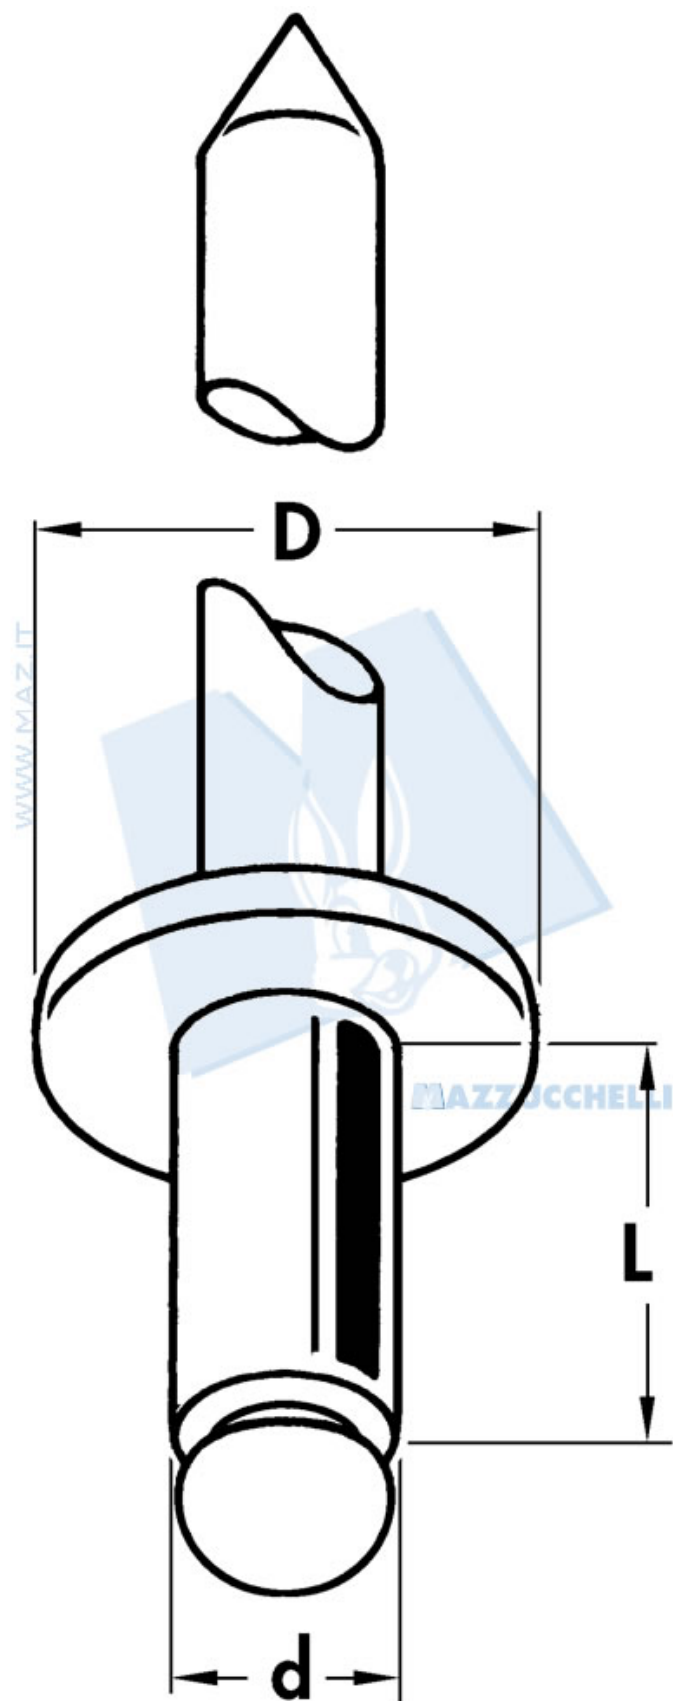

		d	L	D	 mm	 mm min ÷ max
67 (656 N)	102 (999 N)	3	5	6	3.1	0.5 Æ 2
67 (656 N)	102 (999 N)	3	6	6	3.1	1 Æ 3
67 (656 N)	102 (999 N)	3	7	6	3.1	2 Æ 4
67 (656 N)	102 (999 N)	3	9	6	3.1	4 Æ 6
67 (656 N)	102 (999 N)	3	11	6	3.1	6 Æ 8
67 (656 N)	102 (999 N)	3	14	6	3.1	9 Æ 11
67 (656 N)	102 (999 N)	3	16	6	3.1	11 Æ 13

		d	L	D	 mm	 mm min ÷ max
67 (656 N)	102 (999 N)	*3	18	6	3.1	13 Æ 15
67 (656 N)	102 (999 N)	*3	20	6	3.1	15 Æ 17
90 (882 N)	122 (1195 N)	3.2	6	6.5	3.3	0.5 Æ 3
90 (882 N)	122 (1195 N)	3.2	7	6.5	3.3	3 Æ 4
90 (882 N)	122 (1195 N)	3.2	9	6.5	3.3	4 Æ 6
90 (882 N)	122 (1195 N)	3.2	11	6.5	3.3	6 Æ 8
100 (980 N)	142 (1391 N)	3.4	5	7	3.5	0.5 Æ 2
100 (980 N)	142 (1391 N)	3.4	6	7	3.5	1 Æ 3
100 (980 N)	142 (1391 N)	3.4	7	7	3.5	2 Æ 4
100 (980 N)	142 (1391 N)	3.4	9	7	3.5	4 Æ 6
100 (980 N)	142 (1391 N)	3.4	11	7	3.5	6 Æ 8
100 (980 N)	142 (1391 N)	3.4	14	7	3.5	8 Æ 11
100 (980 N)	142 (1391 N)	3.4	16	7	3.5	11 Æ 13
100 (980 N)	142 (1391 N)	3.4	18	7	3.5	13 Æ 15
100 (980 N)	142 (1391 N)	*3.4	20	7	3.5	15 Æ 17
100 (980 N)	142 (1391 N)	*3.4	22	7	3.5	17 Æ 19

*Disponibile solo su richiesta e per quantitativi minimi di 30.000 pz.