


articoli di fissaggio > rivetti a strappo in rame > rivetti a strappo in rame

Rivetti in rame naturale

Con chiodo in acciaio zincato

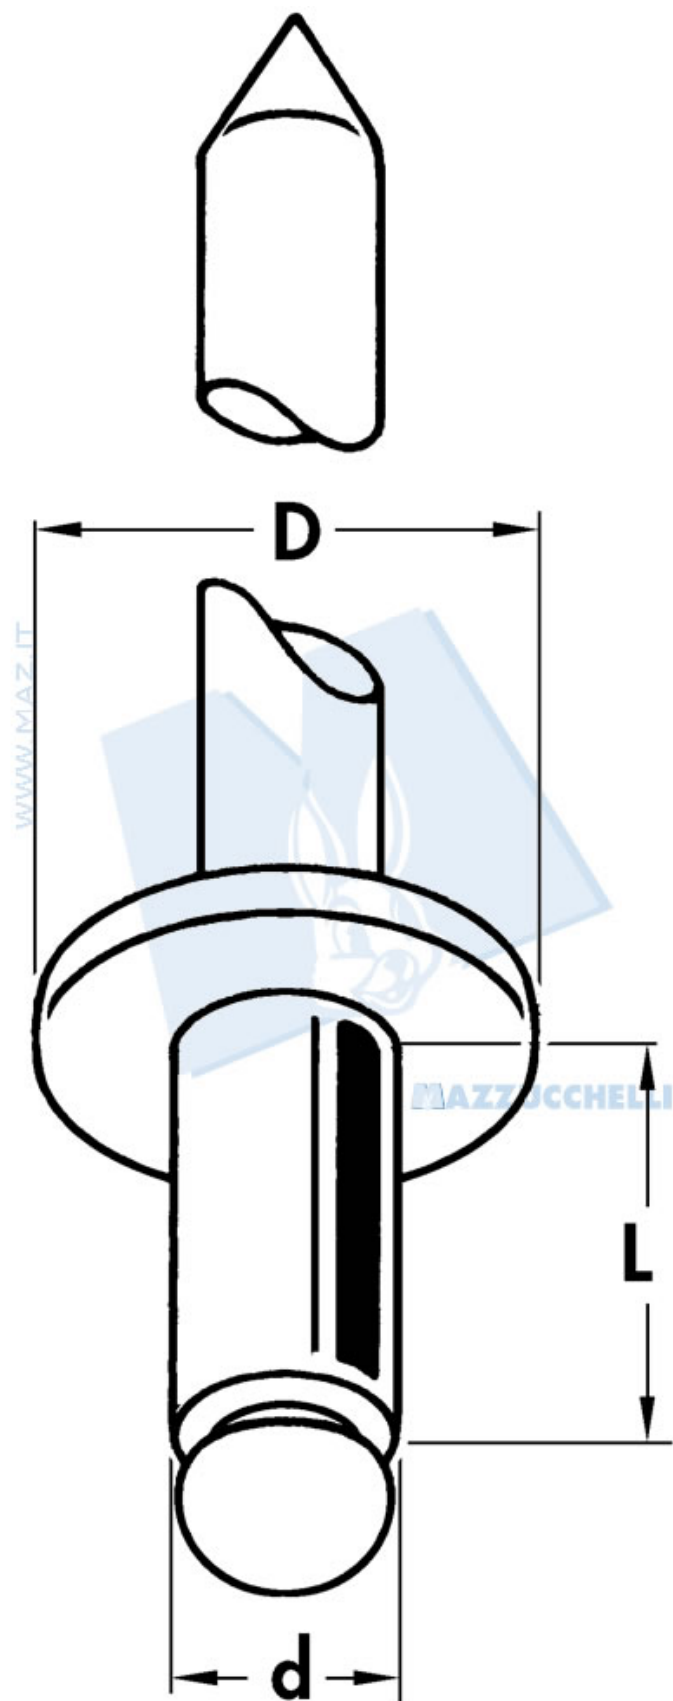

		d	L	D	 mm	 mm min ÷ max
132 (1293 N)	183 (1793 N)	4	5	8	4.1	0.5 Æ 1.5
132 (1293 N)	183 (1793 N)	4	6	8	4.1	1.5 Æ 2.5
132 (1293 N)	183 (1793 N)	4	7	8	4.1	2.5 Æ 3.5
132 (1293 N)	183 (1793 N)	4	9	8	4.1	3.5 Æ 5.5
132 (1293 N)	183 (1793 N)	4	11	8	4.1	5.5 Æ 7.5
132 (1293 N)	183 (1793 N)	4	12	8	4.1	7.5 Æ 8.5
132 (1293 N)	183 (1793 N)	4	14	8	4.1	8.5 Æ 10.5

		d	L	D	 mm	 mm min ÷ max
132 (1293 N)	183 (1793 N)	4	16	8	4.1	10.5 Æ 12.5
132 (1293 N)	183 (1793 N)	4	18	8	4.1	12.5 Æ 14.5
132 (1293 N)	183 (1793 N)	4	20	8	4.1	14.5 Æ 16.5
132 (1293 N)	183 (1793 N)	*4	25	8	4.1	16.5 Æ 21.5
132 (1293 N)	183 (1793 N)	*4	30	8	4.1	21.5 Æ 26.5
197 (1930 N)	280 (2744 N)	4.8	6	9	5	0.5 Æ 2
197 (1930 N)	280 (2744 N)	4.8	8	9	5	2 Æ 4
197 (1930 N)	280 (2744 N)	4.8	10	9	5	4 Æ 6
197 (1930 N)	280 (2744 N)	4.8	12	9	5	6 Æ 8
197 (1930 N)	280 (2744 N)	4.8	14	9	5	8 Æ 10
197 (1930 N)	280 (2744 N)	4.8	16	9	5	10 Æ 12
197 (1930 N)	280 (2744 N)	4.8	18	9	5	12 Æ 14
197 (1930 N)	280 (2744 N)	4.8	20	9	5	14 Æ 16
197 (1930 N)	280 (2744 N)	4.8	24	9	5	16 Æ 20
197 (1930 N)	280 (2744 N)	4.8	30	9	5	20 Æ 26

*Disponibile solo su richiesta e per quantitativi minimi di 30.000 pz.