


articoli di fissaggio > rivetti a strappo in rame > rivetti a strappo in rame

Rivetti in rame

Con chiodo in ottone

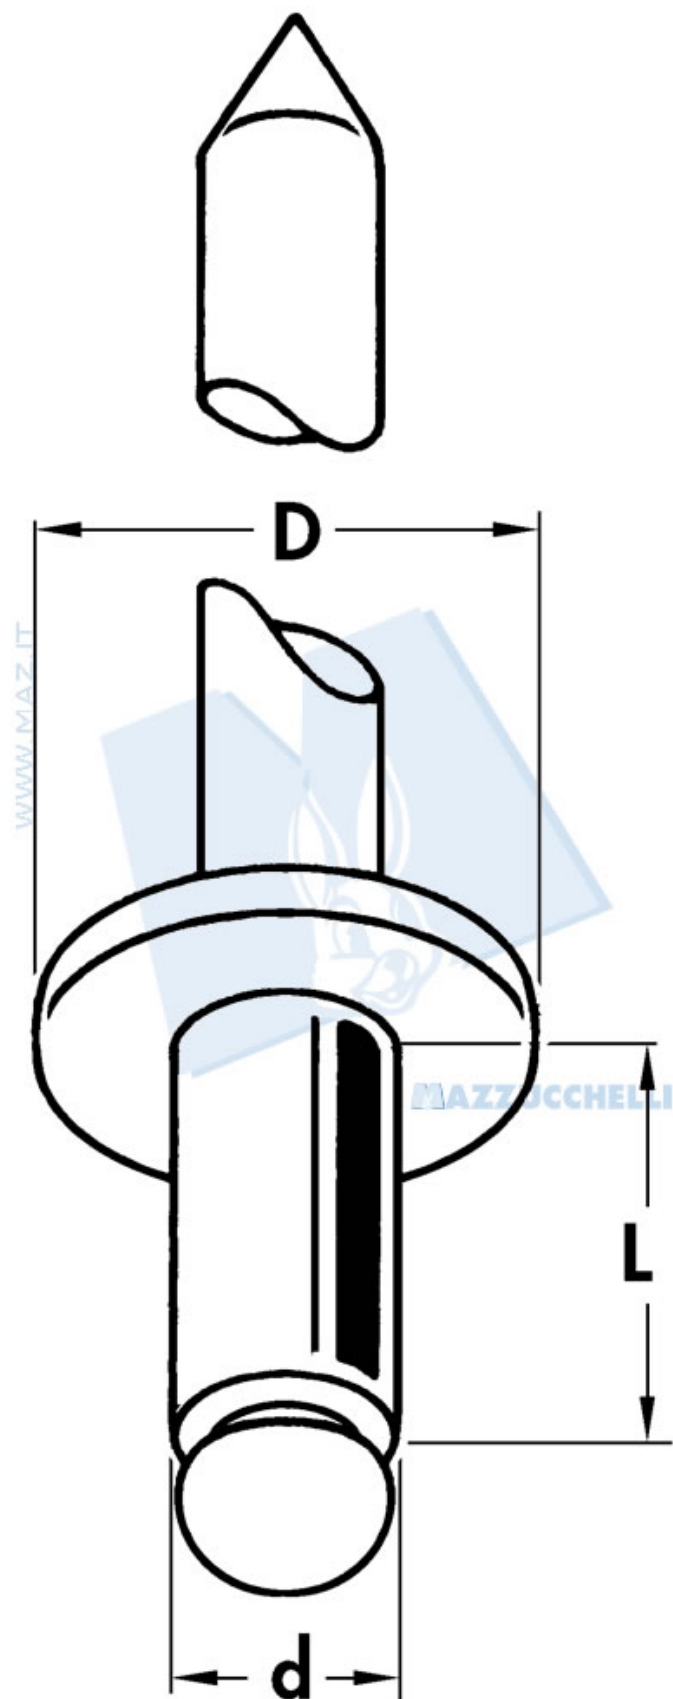

		d	L	D	 mm	 mm min ÷ max
90 (882 N)	122 (1195 N)	3.2	6	6.5	3.3	0.5 Æ 3
90 (882 N)	122 (1195 N)	3.2	7	6.5	3.3	3 Æ 4
90 (882 N)	122 (1195 N)	3.2	9	6.5	3.3	4 Æ 6
90 (882 N)	122 (1195 N)	3.2	11	6.5	3.3	6 Æ 8
100 (980 N)	140 (1372 N)	3.4	6	7	3.5	0.5 Æ 3
100 (980 N)	140 (1372 N)	3.4	7	7	3.5	3 Æ 4
100 (980 N)	140 (1372 N)	3.4	9	7	3.5	4 Æ 6

		d	L	D	 mm	 mm min ÷ max
100 (980 N)	140 (1372 N)	3.4	11	7	3.5	6 Æ 8
132 (1293 N)	180 (1764 N)	*4	6	8	4.1	0.5 Æ 2.5
132 (1293 N)	180 (1764 N)	*4	7	8	4.1	2.5 Æ 3.5
132 (1293 N)	180 (1764 N)	*4	9	8	4.1	3.5 Æ 5.5
132 (1293 N)	180 (1764 N)	*4	11	8	4.1	5.5 Æ 7.5

*Disponibile solo su richiesta e per quantitativi minimi di 5.000 pz.