


articoli di fissaggio > rivetti a strappo in acciaio e ottone > rivetti a strappo in acciaio e ottone

Rivetti tutto acciaio zincato

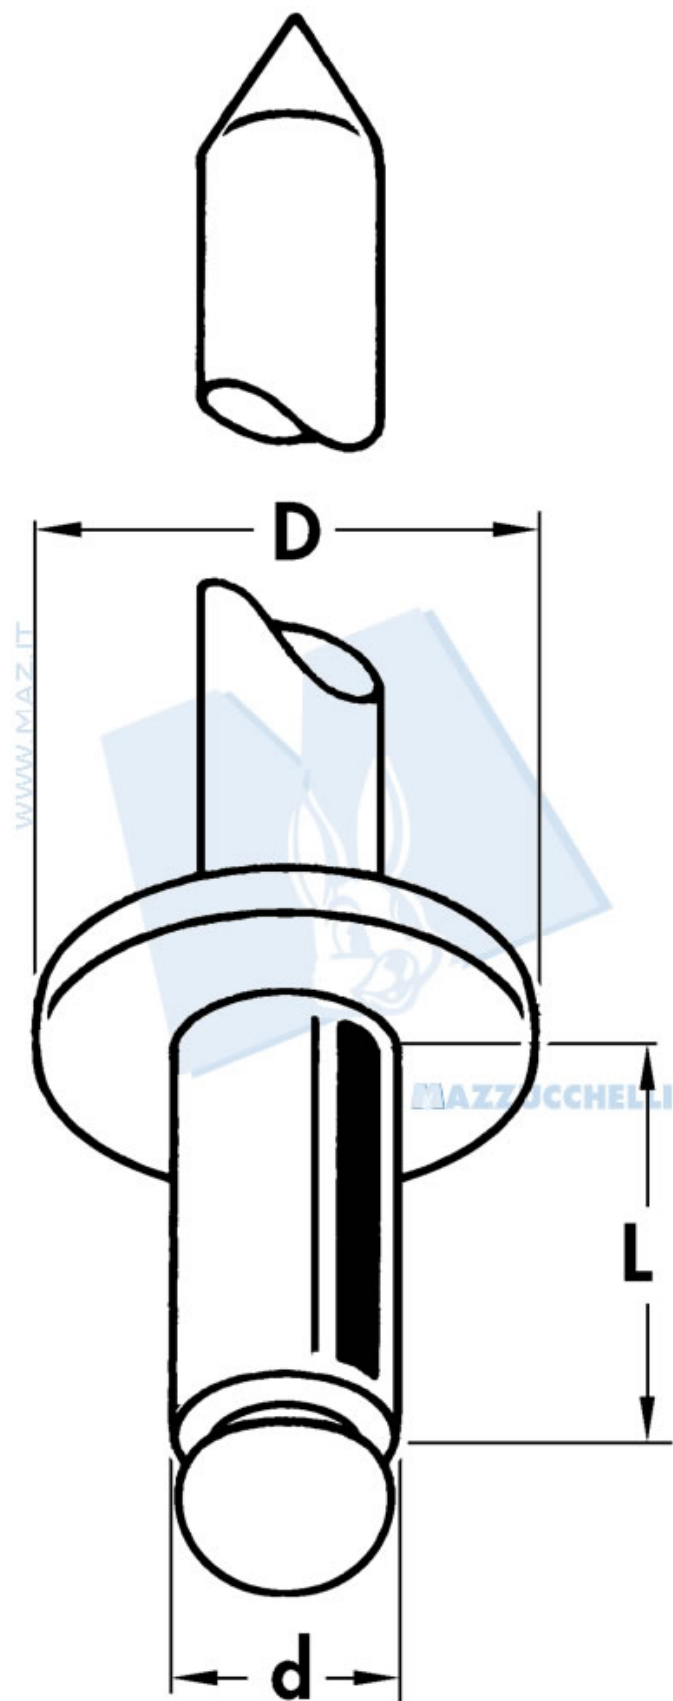

		d	L	D	 mm	 mm min ± max
290 (2842 N)	372 (3645 N)	4.8	6	9	5	0.5 Æ 2
290 (2842 N)	372 (3645 N)	4.8	7	9	5	2 Æ 3
290 (2842 N)	372 (3645 N)	4.8	8	9	5	3 Æ 4
290 (2842 N)	372 (3645 N)	4.8	9	9	5	4 Æ 5
290 (2842 N)	372 (3645 N)	4.8	10	9	5	5 Æ 6
290 (2842 N)	372 (3645 N)	4.8	11	9	5	6 Æ 7
290 (2842 N)	372 (3645 N)	4.8	12	9	5	7 Æ 8

		d	L	D	 mm	 mm min + max
290 (2842 N)	372 (3645 N)	4.8	14	9	5	8 Æ 10
290 (2842 N)	372 (3645 N)	4.8	16	9	5	10 Æ 12
290 (2842 N)	372 (3645 N)	4.8	18	9	5	12 Æ 14
290 (2842 N)	372 (3645 N)	4.8	20	9	5	14 Æ 16
290 (2842 N)	372 (3645 N)	4.8	24	9	5	16 Æ 20
290 (2842 N)	372 (3645 N)	4.8	30	9	5	20 Æ 26
495 (4851 N)	581 (5693 N)	6	12	12	6.1	4 Æ 7
495 (4851 N)	581 (5693 N)	6	15	12	6.1	7 Æ 10
495 (4851 N)	581 (5693 N)	6	18	12	6.1	10 Æ 13
495 (4851 N)	581 (5693 N)	6	22	12	6.1	13 Æ 17
495 (4851 N)	581 (5693 N)	6	26	12	6.1	17 Æ 21
495 (4851 N)	581 (5693 N)	6	30	12	6.1	21 Æ 25
527 (5164 N)	663 (6497 N)	6.4	12	12	6.5	4 Æ 7
527 (5164 N)	663 (6497 N)	6.4	15	12	6.5	7 Æ 10
527 (5164 N)	663 (6497 N)	6.4	18	12	6.5	10 Æ 13
527 (5164 N)	663 (6497 N)	6.4	22	12	6.5	13 Æ 17
527 (5164 N)	663 (6497 N)	6.4	26	12	6.5	17 Æ 21
527 (5164 N)	663 (6497 N)	6.4	30	12	6.5	21 Æ 25