


articoli di fissaggio > rivetti a strappo in acciaio e ottone > rivetti a strappo in acciaio e ottone

Rivetti in ottone (Cu 63% Zn 37%)

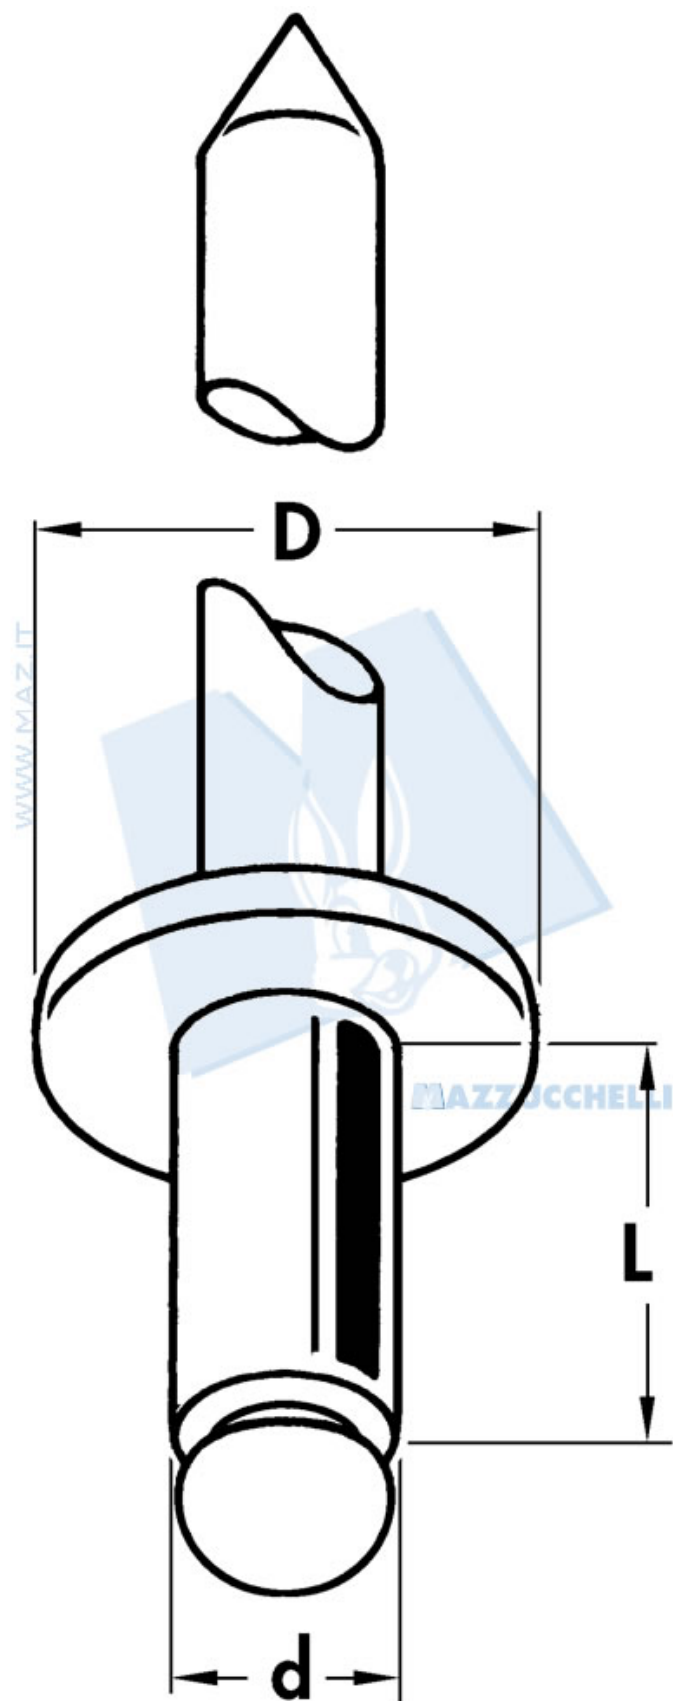

		d	L	D	 mm	 mm min ÷ max
105 (1029 N)	143 (1401 N)	3	6	6	3.1	0.5 Æ 3
105 (1029 N)	143 (1401 N)	3	7	6	3.1	3 Æ 4
105 (1029 N)	143 (1401 N)	3	9	6	3.1	4 Æ 6
105 (1029 N)	143 (1401 N)	3	11	6	3.1	6 Æ 8
190 (1862 N)	255 (2499 N)	4	7	8	4.1	0.5 Æ 3.5
190 (1862 N)	255 (2499 N)	4	9	8	4.1	3.5 Æ 5.5
190 (1862 N)	255 (2499 N)	4	10	8	4.1	5.5 Æ 6.5

		d	L	D	 mm	 mm min ÷ max
190 (1862 N)	255 (2499 N)	4	11	8	4.1	6.5 Æ 7.5
190 (1862 N)	255 (2499 N)	4	12	8	4.1	7.5 Æ 8.5
190 (1862 N)	255 (2499 N)	4	14	8	4.1	8.5 Æ 10.5
190 (1862 N)	255 (2499 N)	4	16	8	4.1	10.5 Æ 12.5
312 (3057 N)	387 (3792 N)	4.8	7	9	5	1 Æ 3
312 (3057 N)	387 (3792 N)	4.8	9	9	5	3 Æ 5
312 (3057 N)	387 (3792 N)	4.8	11	9	5	5 Æ 7
312 (3057 N)	387 (3792 N)	4.8	12	9	5	7 Æ 8
312 (3057 N)	387 (3792 N)	4.8	14	9	5	8 Æ 10
312 (3057 N)	387 (3792 N)	4.8	16	9	5	10 Æ 12
312 (3057 N)	387 (3792 N)	4.8	18	9	5	12 Æ 14
312 (3057 N)	387 (3792 N)	4.8	20	9	5	14 Æ 16
312 (3057 N)	387 (3792 N)	4.8	25	9	5	16 Æ 21
312 (3057 N)	387 (3792 N)	4.8	30	9	5	21 Æ 26