


articoli di fissaggio > rivetti a strappo ermetici > rivetti a strappo ermetici

Rivetti ermetici in alluminio AlMg 5

Con chiodo in acciaio inox

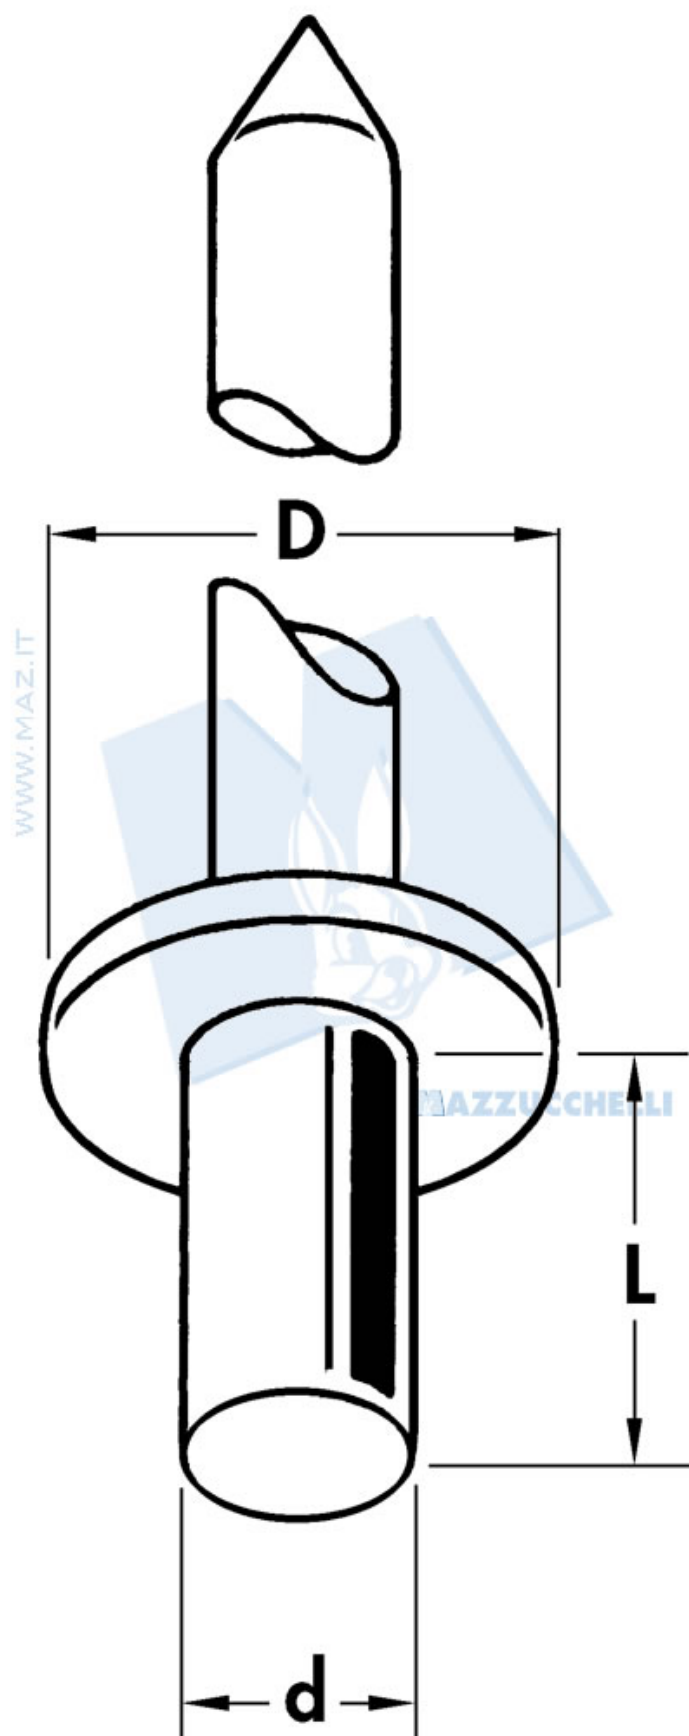

		d	L	D	 mm	 mm min ÷ max
105 (1029 N)	140 (1372 N)	3.2	6	6	3.3	0.8 Æ 2
105 (1029 N)	140 (1372 N)	3.2	8	6	3.3	2 Æ 3.5
105 (1029 N)	140 (1372 N)	3.2	9	6	3.3	3.5 Æ 4.5
105 (1029 N)	140 (1372 N)	3.2	11	6	3.3	4.5 Æ 6.5
105 (1029 N)	140 (1372 N)	3.2	12	6	3.3	6.5 Æ 7.5
155 (1519 N)	220 (2156 N)	4	8	8	4.1	0.8 Æ 3.5

		d	L	D	 mm	 mm min + max
155 (1519 N)	220 (2156 N)	4	9	8	4.1	3.5 Æ 4.5
155 (1519 N)	220 (2156 N)	4	11	8	4.1	4.5 Æ 6.5
155 (1519 N)	220 (2156 N)	4	12	8	4.1	6.5 Æ 7.5
210 (2058 N)	310 (3038 N)	4.8	8	9.5	5	0.8 Æ 3.5
210 (2058 N)	310 (3038 N)	4.8	9	9.5	5	3.5 Æ 4.5
210 (2058 N)	310 (3038 N)	4.8	11	9.5	5	4.5 Æ 6.5
210 (2058 N)	310 (3038 N)	4.8	12	9.5	5	6.5 Æ 7.5
210 (2058 N)	310 (3038 N)	4.8	14	9.5	5	7.5 Æ 9.5
210 (2058 N)	310 (3038 N)	4.8	16	9.5	5	9.5 Æ 11.5
210 (2058 N)	310 (3038 N)	4.8	18	9.5	5	11.5 Æ 13.5
210 (2058 N)	310 (3038 N)	4.8	21	9.5	5	13.5 Æ 15.5