


articoli di fissaggio > inserti filettati > inserti filettati

Inserti filettati a testa svasata in lega di alluminio

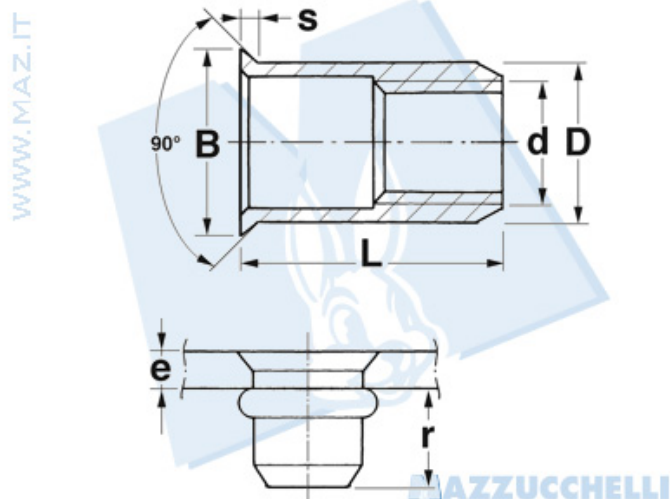

Codice Nr.	d 6H	D 0 -01	B max	S	L	r min Å · max	 ± 0,05	 mm
M 3 FTS/C	M 3	4.9	8	1.5	9.5	4.7 Å · 5.3	5	2 Å · 3
M 3 FTS/L	M 3	4.9	8	1.5	10.5	4.7 Å · 5.3	5	3 Å · 4
M 4 FTS /C	M 4	5.9	9	1.5	11	5.8 Å · 6.3	6	2.0 Å · 3.5
M 4 FTS/L	M 4	5.9	9	1.5	13	5.8 Å · 6.3	6	3.5 Å · 5
M 5 FTS/C	M 5	6.9	10	1.5	13	6.8 Å · 7.3	7	2.5 Å · 4
M 5 FTS/L	M 5	6.9	10	1.5	15	6.8 Å · 7.3	7	4 Å · 6
M 6 FTS/C	M 6	8.9	12	1.5	15	8.5 Å · 9.2	9	2.5 Å · 4
M 6 FTS/L	M 6	8.9	12	1.5	17	8.5 Å · 9.2	9	4 Å · 6
M 8 FTS/L	M 8	10.9	14	1.5	16.5	9.5 Å · 10.4	11	2.5 Å · 4
M 8 FTS/L	M 8	10.9	14	1.5	19	9.5 Å · 10.4	11	4 Å · 6
M 10 FTS/C	M 10	11.9	15	1.5	18	11 Å · 12	12	2.5 Å · 4
M 10 FTS/L	M 10	11.9	15	1.5	20.5	11 Å · 12	12	4 Å · 6