


articoli di fissaggio > rivetti a strappo in alluminio > rivetti a strappo in alluminio

Rivetti in lega di alluminio AlMg 3.5

Con chiodo in acciaio zincato

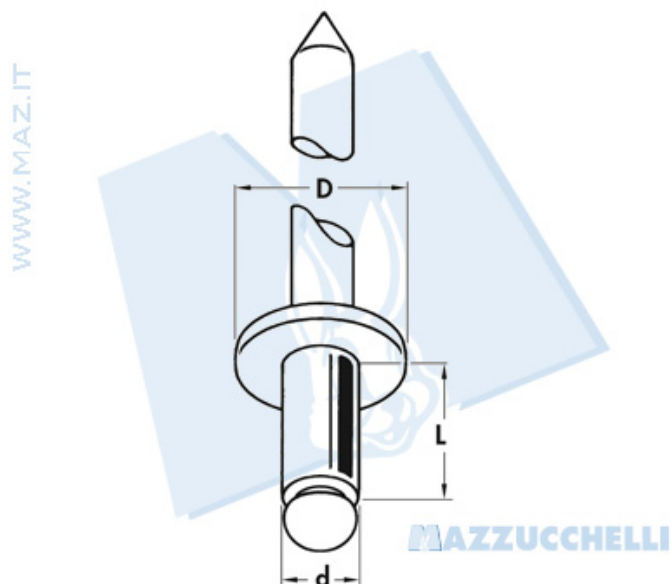


		d	L	D		
Kg	Kg				mm	mm min - max
35 (343 N)	45 (441 N)	2.4	6	5	2.5	0.5 Æ 3
35 (343 N)	45 (441 N)	2.4	8	5	2.5	3 Æ 5
35 (343 N)	45 (441 N)	2.4	10	5	2.5	5 Æ 7
35 (343 N)	45 (441 N)	2.4	12	5	2.5	7 Æ 9
65 (637 N)	90 (882 N)	3	5	6	3.1	0.5 Æ 2
65 (637 N)	90 (882 N)	3	6	6	3.1	1 Æ 3
65 (637 N)	90 (882 N)	3	7	6	3.1	2 Æ 4
65 (637 N)	90 (882 N)	3	8	6	3.1	3 Æ 5
65 (637 N)	90 (882 N)	3	9	6	3.1	4 Æ 6
65 (637 N)	90 (882 N)	3	10	6	3.1	5 Æ 7
65 (637 N)	90 (882 N)	3	11	6	3.1	6 Æ 8
65 (637 N)	90 (882 N)	3	12	6	3.1	7 Æ 9
65 (637 N)	90 (882 N)	3	14	6	3.1	9 Æ 11
65 (637 N)	90 (882 N)	3	16	6	3.1	11 Æ 13
65 (637 N)	90 (882 N)	3	18	6	3.1	13 Æ 15
70 (686 N)	100 (980 N)	3.2	5	6.5	3.3	0.5 Æ 2
70 (686 N)	100 (980 N)	3.2	6	6.5	3.3	1 Æ 3
70 (686 N)	100 (980 N)	3.2	7	6.5	3.3	2 Æ 4
70 (686 N)	100 (980 N)	3.2	8	6.5	3.3	3 Æ 5
70 (686 N)	100 (980 N)	3.2	9	6.5	3.3	4 Æ 6
70 (686 N)	100 (980 N)	3.2	10	6.5	3.3	5 Æ 7
70 (686 N)	100 (980 N)	3.2	11	6.5	3.3	6 Æ 8
70 (686 N)	100 (980 N)	3.2	12	6.5	3.3	7 Æ 9
70 (686 N)	100 (980 N)	3.2	14	6.5	3.3	9 Æ 11
70 (686 N)	100 (980 N)	3.2	16	6.5	3.3	11 Æ 13
70 (686 N)	100 (980 N)	3.2	18	6.5	3.3	13 Æ 15

*Disponibile solo su richiesta e per quantitativi minimi di 30.000 pz.

articoli di fissaggio > rivetti a strappo in alluminio > rivetti a strappo in alluminio

Rivetti in lega di alluminio AlMg 3.5

Con chiodo in acciaio zincato

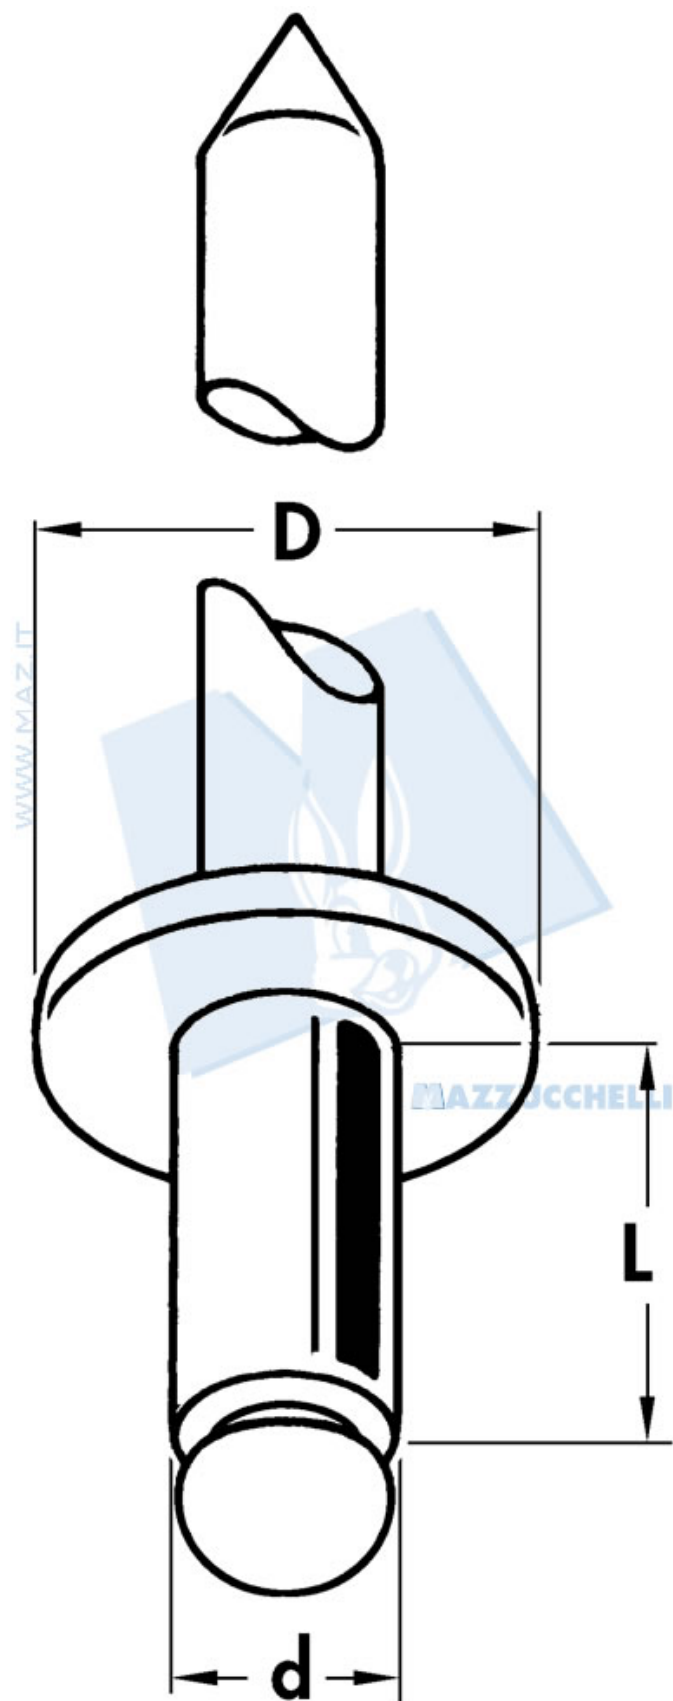

		d	L	D	 mm	 mm min ± max
75 (735 N)	110 (1078 N)	3.4	5	7	3.5	0.5 Æ 2
75 (735 N)	110 (1078 N)	3.4	6	7	3.5	1 Æ 3
75 (735 N)	110 (1078 N)	3.4	7	7	3.5	2 Æ 4
75 (735 N)	110 (1078 N)	3.4	8	7	3.5	3 Æ 5
75 (735 N)	110 (1078 N)	3.4	9	7	3.5	4 Æ 6
75 (735 N)	110 (1078 N)	3.4	10	7	3.5	5 Æ 7
75 (735 N)	110 (1078 N)	3.4	11	7	3.5	6 Æ 8


		d	L	D	 mm	 mm min + max
75 (735 N)	110 (1078 N)	3.4	12	7	3.5	7 Æ 9
75 (735 N)	110 (1078 N)	3.4	14	7	3.5	9 Æ 11
75 (735 N)	110 (1078 N)	3.4	16	7	3.5	11 Æ 13
75 (735 N)	110 (1078 N)	3.4	18	7	3.5	13 Æ 15
75 (735 N)	110 (1078 N)	*3.4	20	7	3.5	15 Æ 17
130 (1274 N)	185 (1813 N)	4	5	8	4.1	0.5 Æ 1.5
130 (1274 N)	185 (1813 N)	4	6	8	4.1	1.5 Æ 2.5
130 (1274 N)	185 (1813 N)	4	7	8	4.1	2.5 Æ 3.5
130 (1274 N)	185 (1813 N)	4	8	8	4.1	3.5 Æ 4.5
130 (1274 N)	185 (1813 N)	4	9	8	4.1	4.5 Æ 5.5
130 (1274 N)	185 (1813 N)	4	10	8	4.1	5.5 Æ 6.5
130 (1274 N)	185 (1813 N)	4	11	8	4.1	6.5 Æ 7.5
130 (1274 N)	185 (1813 N)	4	12	8	4.1	7.5 Æ 8.5
130 (1274 N)	185 (1813 N)	4	14	8	4.1	8.5 Æ 10.5
130 (1274 N)	185 (1813 N)	4	16	8	4.1	10.5 Æ 12.5
130 (1274 N)	185 (1813 N)	4	18	8	4.1	12.5 Æ 14.5
130 (1274 N)	185 (1813 N)	4	20	8	4.1	14.5 Æ 16.5
130 (1274 N)	185 (1813 N)	4	22	8	4.1	16.5 Æ 18.5
130 (1274 N)	185 (1813 N)	4	24	8	4.1	18.5 Æ 20.5
130 (1274 N)	185 (1813 N)	4	26	8	4.1	20.5 Æ 22.5
130 (1274 N)	185 (1813 N)	4	28	8	4.1	22.5 Æ 24.5
130 (1274 N)	185 (1813 N)	4	30	8	4.1	24.5 Æ 26.5

*Disponibile solo su richiesta e per quantitativi minimi di 30.000 pz.

articoli di fissaggio > rivetti a strappo in alluminio > rivetti a strappo in alluminio

Rivetti in lega di alluminio AlMg 3.5

Con chiodo in acciaio zincato

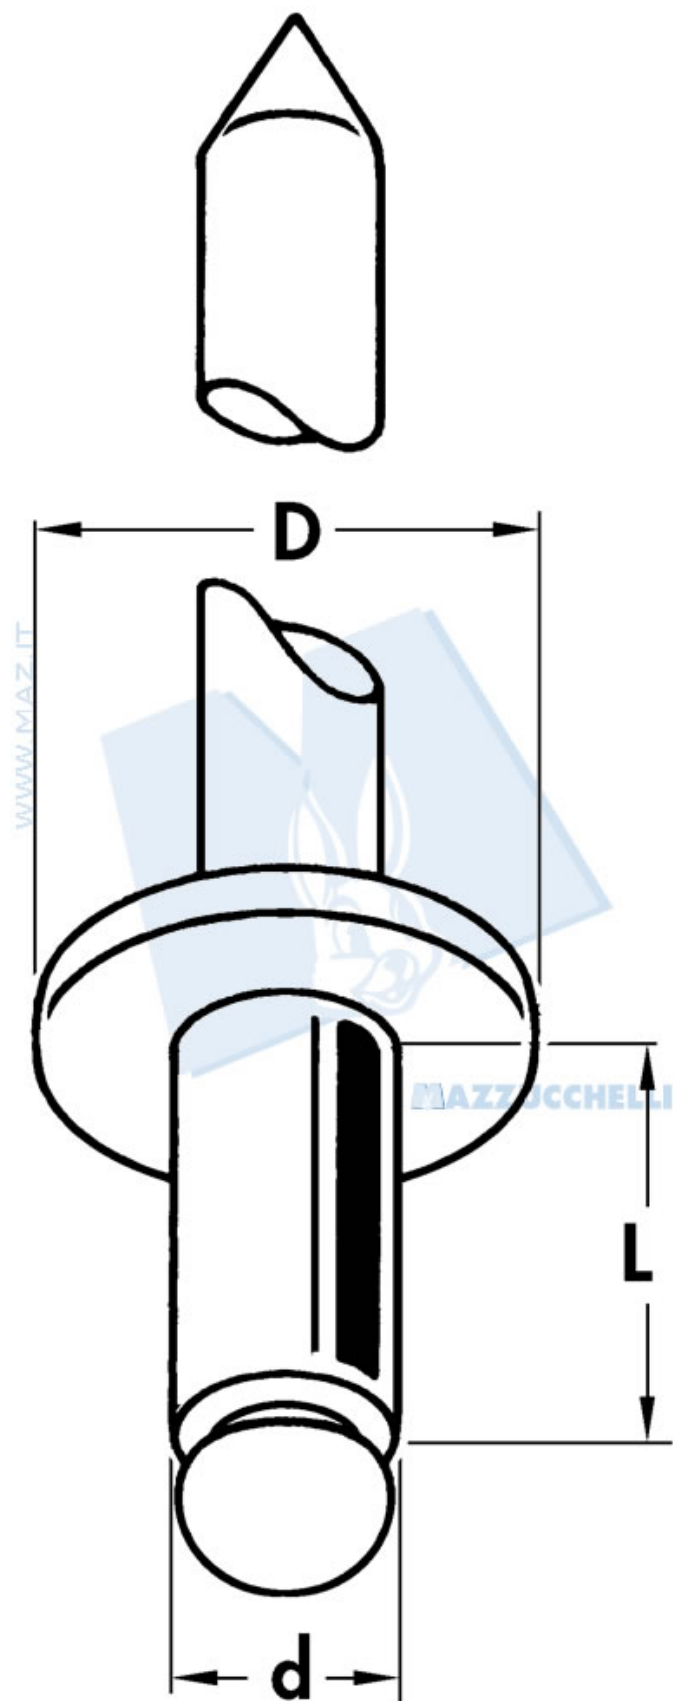


		d	L	D	 mm	 mm min ± max
223 (2185 N)	304 (2979 N)	4.8	6	10	5	0.5 Å· 2
223 (2185 N)	304 (2979 N)	4.8	7	10	5	2 Å· 3
223 (2185 N)	304 (2979 N)	4.8	8	10	5	3 Å· 4
223 (2185 N)	304 (2979 N)	4.8	9	10	5	4 Å· 5
223 (2185 N)	304 (2979 N)	4.8	10	10	5	5 Å· 6
223 (2185 N)	304 (2979 N)	4.8	11	10	5	6 Å· 7
223 (2185 N)	304 (2979 N)	4.8	12	10	5	7 Å· 8

		d	L	D	 mm	 mm min + max
223 (2185 N)	304 (2979 N)	4.8	14	10	5	8 Å· 10
223 (2185 N)	304 (2979 N)	4.8	16	10	5	10 Å· 12
223 (2185 N)	304 (2979 N)	4.8	18	10	5	12 Å· 14
223 (2185 N)	304 (2979 N)	4.8	20	10	5	14 Å· 16
223 (2185 N)	304 (2979 N)	4.8	22	10	5	16 Å· 18
223 (2185 N)	304 (2979 N)	4.8	24	10	5	18 Å· 20
223 (2185 N)	304 (2979 N)	4.8	26	10	5	20 Å· 22
223 (2185 N)	304 (2979 N)	4.8	28	10	5	22 Å· 24
223 (2185 N)	304 (2979 N)	4.8	30	10	5	24 Å· 26
223 (2185 N)	304 (2979 N)	4.8	35	10	5	26 Å· 31
223 (2185 N)	304 (2979 N)	4.8	40	10	5	31 Å· 36
223 (2185 N)	304 (2979 N)	4.8	45	10	5	36 Å· 41
223 (2185 N)	304 (2979 N)	4.8	50	10	5	41 Å· 46

articoli di fissaggio > rivetti a strappo in alluminio > rivetti a strappo in alluminio

Rivetti in lega di alluminio AlMg 5

Con chiodo in acciaio zincato

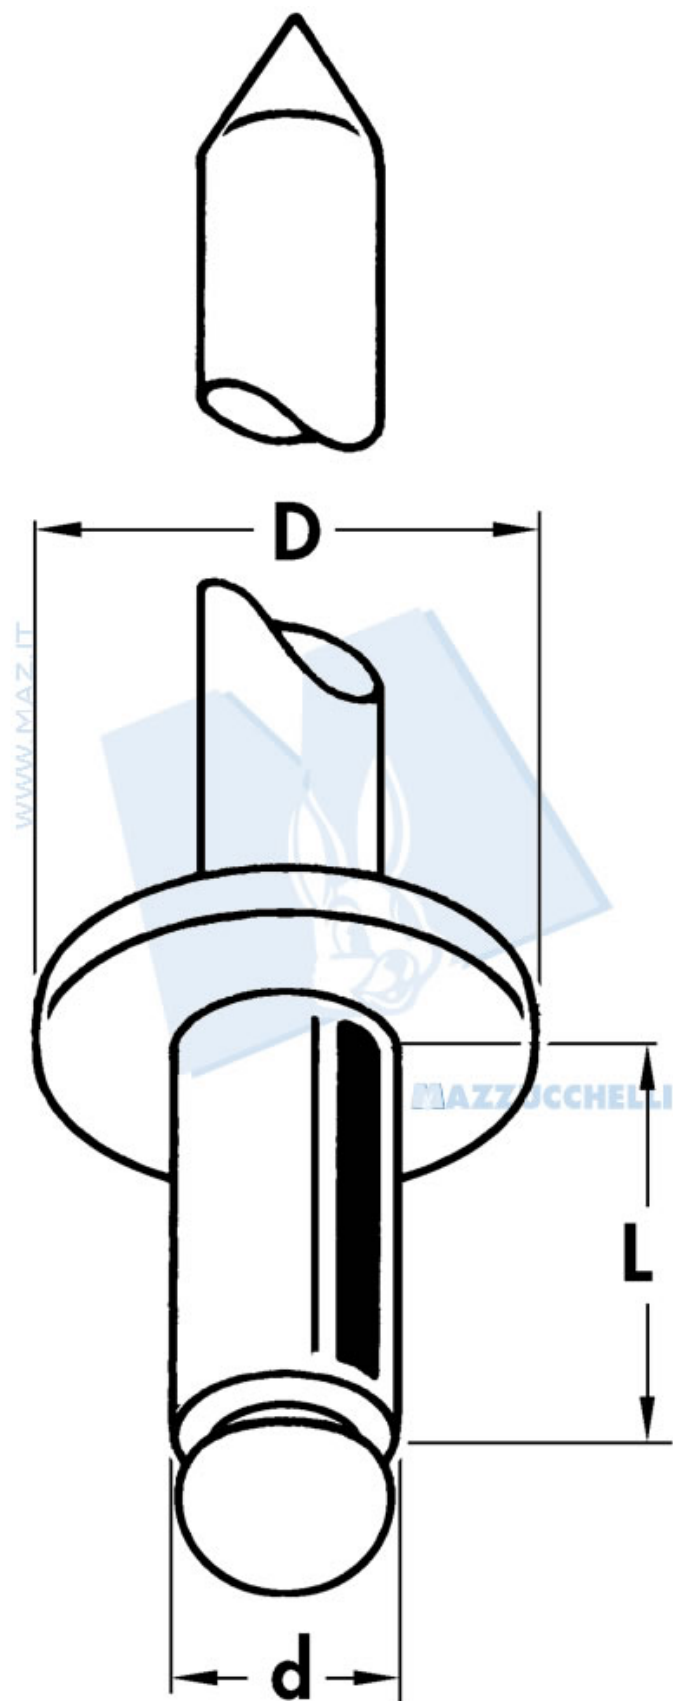


 Kg	 Kg	d	L	D	 mm	 mm min ± max
280 (2744 N)	433 (4341 N)	6	8	12	6.1	2 Æ 3
280 (2744 N)	433 (4341 N)	6	10	12	6.1	3 Æ 5
280 (2744 N)	433 (4341 N)	6	12	12	6.1	5 Æ 7
280 (2744 N)	433 (4341 N)	6	15	12	6.1	7 Æ 10
280 (2744 N)	433 (4341 N)	6	18	12	6.1	10 Æ 13
280 (2744 N)	433 (4341 N)	6	22	12	6.1	13 Æ 17
280 (2744 N)	433 (4341 N)	6	26	12	6.1	17 Æ 21

		d	L	D	 mm	 mm min + max
280 (2744 N)	433 (4341 N)	6	30	12	6.1	21 Å 25
280 (2744 N)	433 (4341 N)	6	35	12	6.1	25 Å 30
280 (2744 N)	433 (4341 N)	6	40	12	6.1	30 Å 35
380 (3724 N)	632 (6193 N)	6.4	8	12	6.5	2 Å 3
380 (3724 N)	632 (6193 N)	6.4	10	12	6.5	3 Å 5
380 (3724 N)	632 (6193 N)	6.4	12	12	6.5	5 Å 7
380 (3724 N)	632 (6193 N)	6.4	15	12	6.5	7 Å 10
380 (3724 N)	632 (6193 N)	6.4	18	12	6.5	10 Å 13
380 (3724 N)	632 (6193 N)	6.4	22	12	6.5	13 Å 17
380 (3724 N)	632 (6193 N)	6.4	26	12	6.5	17 Å 21
380 (3724 N)	632 (6193 N)	6.4	30	12	6.5	21 Å 25
380 (3724 N)	632 (6193 N)	6.4	35	12	6.5	25 Å 30
380 (3724 N)	632 (6193 N)	6.4	40	12	6.5	30 Å 35
677 (6634 N)	979 (9594 N)	7.8	15	14	8	4 Å 9.5
677 (6634 N)	979 (9594 N)	7.8	18	14	8	9.5 Å 12.5
677 (6634 N)	979 (9594 N)	7.8	22	14	8	12.5 Å 16.5
677 (6634 N)	979 (9594 N)	7.8	26	14	8	16.5 Å 20.5
677 (6634 N)	979 (9594 N)	7.8	30	14	8	20.5 Å 24.5
677 (6634 N)	979 (9594 N)	7.8	35	14	8	24.5 Å 29.5
677 (6634 N)	979 (9594 N)	7.8	40	14	8	29.5 Å 34.5

articoli di fissaggio > rivetti a strappo in alluminio > rivetti a strappo in alluminio

Rivetti in lega di alluminio AlMg 3.5

A testa larga

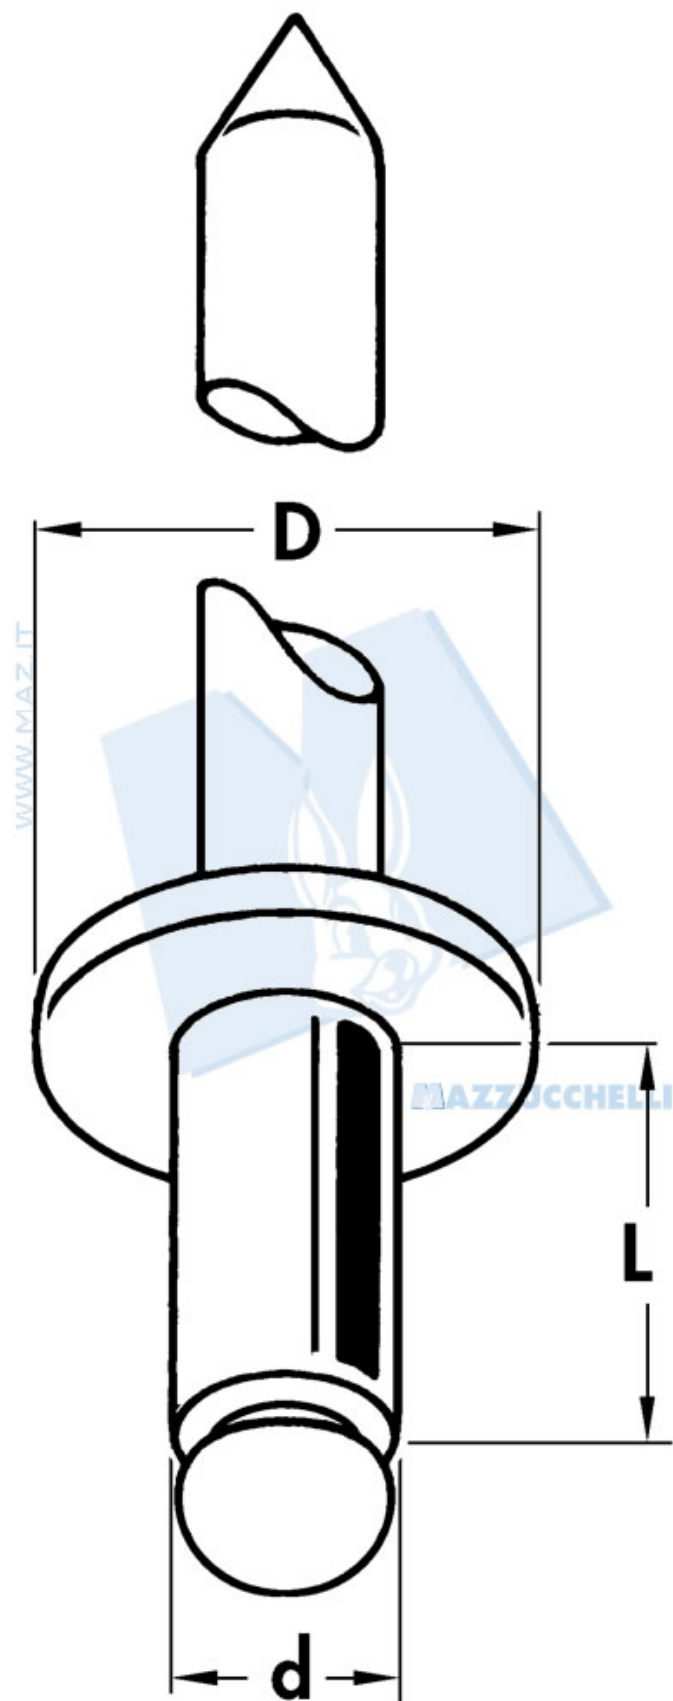


 Kg	 Kg	d	L	D	 mm	 mm min ÷ max
70 (686 N)	100 (980 N)	3.2	8	10	3.3	3 Æ 5
70 (686 N)	100 (980 N)	3.2	10	10	3.3	5 Æ 7
70 (686 N)	100 (980 N)	3.2	12	10	3.3	7 Æ 9
70 (686 N)	100 (980 N)	3.2	14	10	3.3	9 Æ 11
130 (1274 N)	185 (1813 N)	4	7	10	4.1	2.5 Æ 3.5
130 (1274 N)	185 (1813 N)	4	9	10	4.1	4.5 Æ 5.5
130 (1274 N)	185 (1813 N)	4	9	10	4.1	4.5 Æ 5.5

		d	L	D	 mm	 mm min ÷ max
130 (1274 N)	185 (1813 N)	4	11	10	4.1	5.5 Æ 7.5
130 (1274 N)	185 (1813 N)	4	13	10	4.1	7.5 Æ 9.5
223 (2185 N)	304 (2979 N)	4.8	8	14	5	3 Æ 4
223 (2185 N)	304 (2979 N)	4.8	9	14	5	4 Æ 5
223 (2185 N)	304 (2979 N)	4.8	10	14	5	5 Æ 6
223 (2185 N)	304 (2979 N)	4.8	12	14	5	6 Æ 8
223 (2185 N)	304 (2979 N)	4.8	14	14	5	8 Æ 10
223 (2185 N)	304 (2979 N)	4.8	16	14	5	10 Æ 12
223 (2185 N)	304 (2979 N)	4.8	18	14	5	12 Æ 14
223 (2185 N)	304 (2979 N)	4.8	20	14	5	14 Æ 16
223 (2185 N)	304 (2979 N)	4.8	22	14	5	16 Æ 18
223 (2185 N)	304 (2979 N)	4.8	24	14	5	18 Æ 20
223 (2185 N)	304 (2979 N)	4.8	26	14	5	20 Æ 22
223 (2185 N)	304 (2979 N)	4.8	28	14	5	22 Æ 24
223 (2185 N)	304 (2979 N)	4.8	30	14	5	24 Æ 26
223 (2185 N)	304 (2979 N)	4.8	35	14	5	26 Æ 31

articoli di fissaggio > rivetti a strappo in alluminio > rivetti a strappo in alluminio

Rivetti in lega di alluminio AlMg 3.5

A testa larga

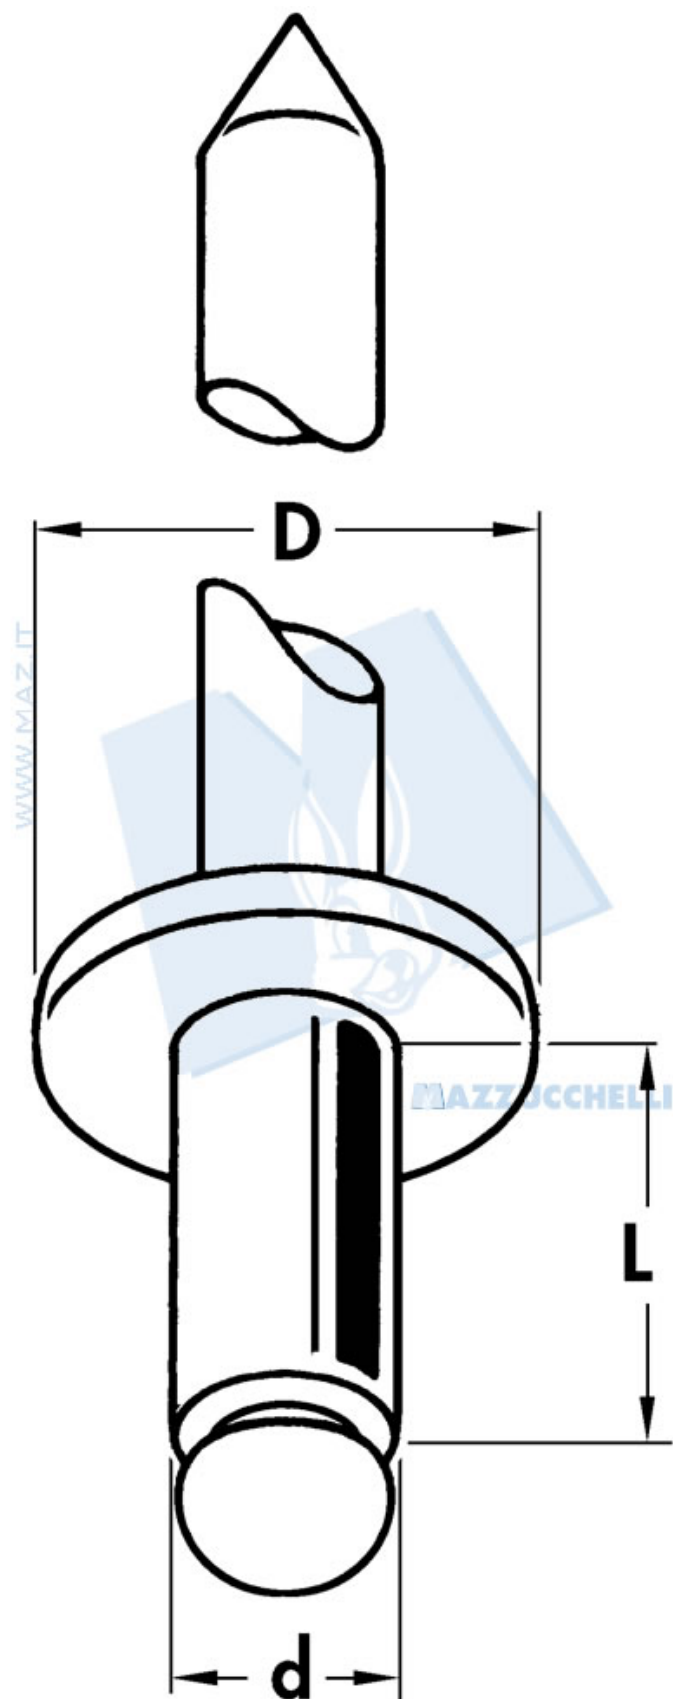

		d	L	D	 mm	 mm min ± max
223 (2185 N)	304 (2979 N)	4.8	10	16	5	5 Æ 6
223 (2185 N)	304 (2979 N)	4.8	12	16	5	6 Æ 8
223 (2185 N)	304 (2979 N)	4.8	14	16	5	8 Æ 10
223 (2185 N)	304 (2979 N)	4.8	16	16	5	10 Æ 12
223 (2185 N)	304 (2979 N)	4.8	18	16	5	12 Æ 14
223 (2185 N)	304 (2979 N)	4.8	20	16	5	14 Æ 16
223 (2185 N)	304 (2979 N)	4.8	22	16	5	16 Æ 18


		d	L	D	 mm	 mm min + max
223 (2185 N)	304 (2979 N)	4.8	24	16	5	18 Æ 20
223 (2185 N)	304 (2979 N)	4.8	26	16	5	20 Æ 22
223 (2185 N)	304 (2979 N)	4.8	28	16	5	22 Æ 24
223 (2185 N)	304 (2979 N)	4.8	30	16	5	24 Æ 26
223 (2185 N)	304 (2979 N)	4.8	35	16	5	26 Æ 31

articoli di fissaggio > rivetti a strappo in alluminio > rivetti a strappo in alluminio

Rivetti a testa svasata in lega di alluminio AlMg

3.5

Con chiodo in acciaio zincato

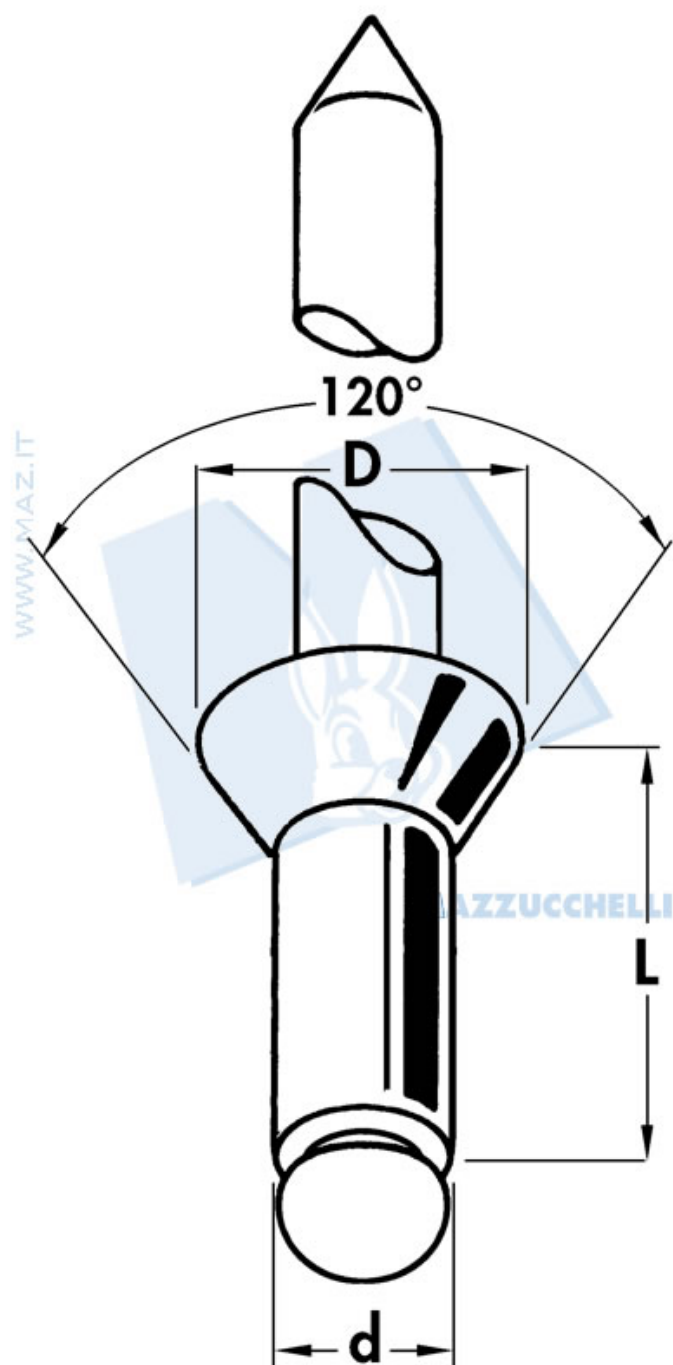


		d	L	D		
70 (686 N)	100 (980 N)	3.2	7	6.5	3.3	2 Å· 4
70 (686 N)	100 (980 N)	3.2	9	6.5	3.3	4 Å· 6
70 (686 N)	100 (980 N)	3.2	11	6.5	3.3	6 Å· 8
70 (686 N)	100 (980 N)	3.2	13	6.5	3.3	8 Å· 10
130 (1274 N)	185 (1813 N)	4	7	8	4.1	3 Å· 4
130 (1274 N)	185 (1813 N)	4	9	8	4.1	4 Å· 6
130 (1274 N)	185 (1813 N)	4	11	8	4.1	6 Å· 8
130 (1274 N)	185 (1813 N)	4	12	8	4.1	8 Å· 9
130 (1274 N)	185 (1813 N)	4	14	8	4.1	9 Å· 11
130 (1274 N)	185 (1813 N)	4	16	8	4.1	11 Å· 13
130 (1274 N)	185 (1813 N)	4	18	8	4.1	13 Å· 15
130 (1274 N)	185 (1813 N)	4	20	8	4.1	15 Å· 17
223 (2185 N)	304 (2979 N)	4.8	7	10	5	3 Å· 4
223 (2185 N)	304 (2979 N)	4.8	9	10	5	4 Å· 5
223 (2185 N)	304 (2979 N)	4.8	11	10	5	5 Å· 7
223 (2185 N)	304 (2979 N)	4.8	12	10	5	7 Å· 8
223 (2185 N)	304 (2979 N)	4.8	14	10	5	8 Å· 10
223 (2185 N)	304 (2979 N)	4.8	16	10	5	10 Å· 12
223 (2185 N)	304 (2979 N)	4.8	18	10	5	12 Å· 14
223 (2185 N)	304 (2979 N)	4.8	20	10	5	14 Å· 16

articoli di fissaggio > rivetti a strappo in alluminio > rivetti a strappo in alluminio

Rivetti in lega di alluminio AlMg 3.5


Anodizzati neri con testa larga

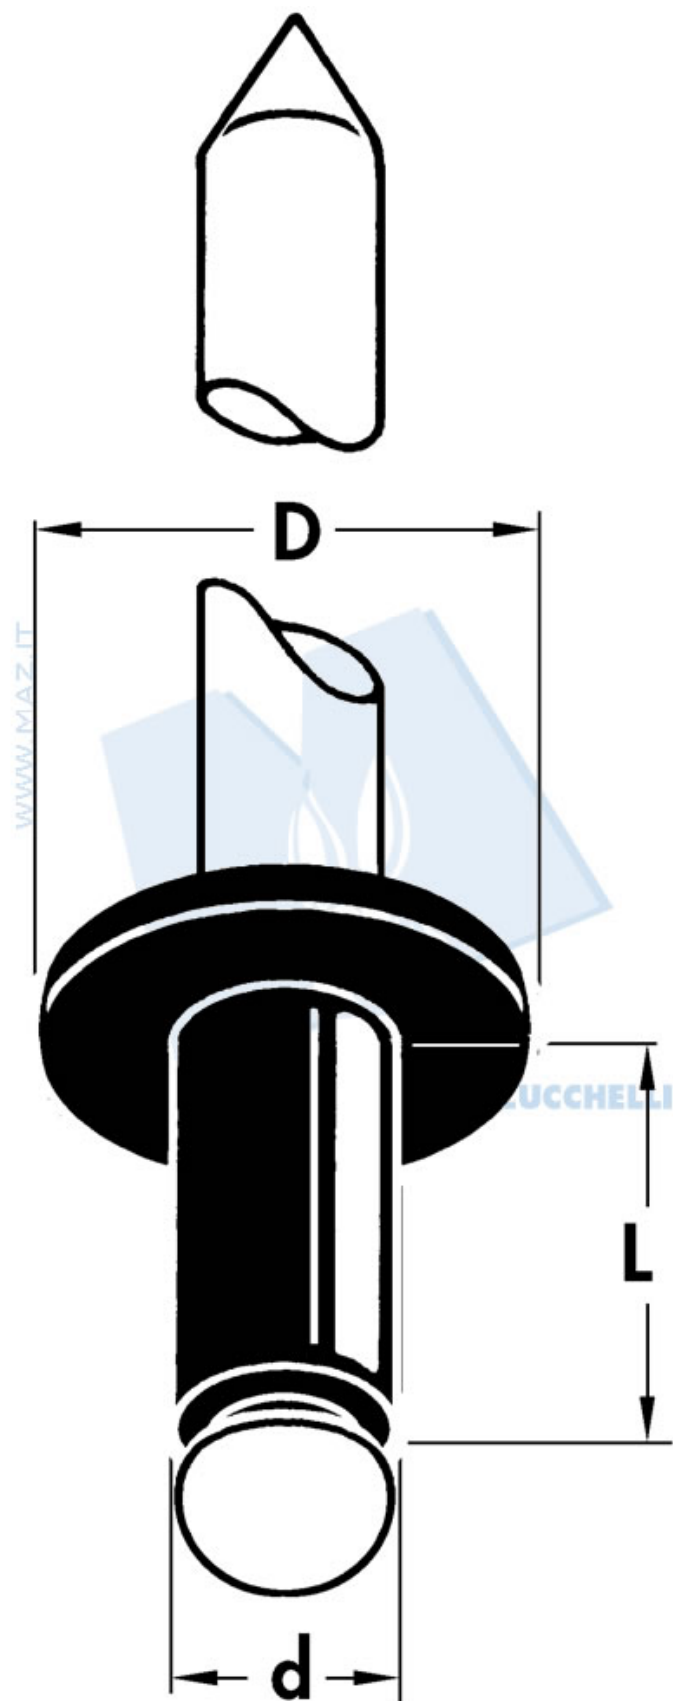

		d	L	D		
Kg	Kg				mm	mm min ÷ max
70 (686 N)	100 (980 N)	3.2	12	10	3.3	7 Æ 9
70 (686 N)	100 (980 N)	3.2	14	10	3.3	9 Æ 11
70 (686 N)	100 (980 N)	3.2	16	10	3.3	11 Æ 13
70 (686 N)	100 (980 N)	3.2	18	10	3.3	13 Æ 15
70 (686 N)	100 (980 N)	3.2	20	10	3.3	15 Æ 17

articoli di fissaggio > rivetti a strappo in alluminio > rivetti a strappo in alluminio

Rivetti tutto alluminio -
 Boccola AlMg 2
Chiodo AlMg 5

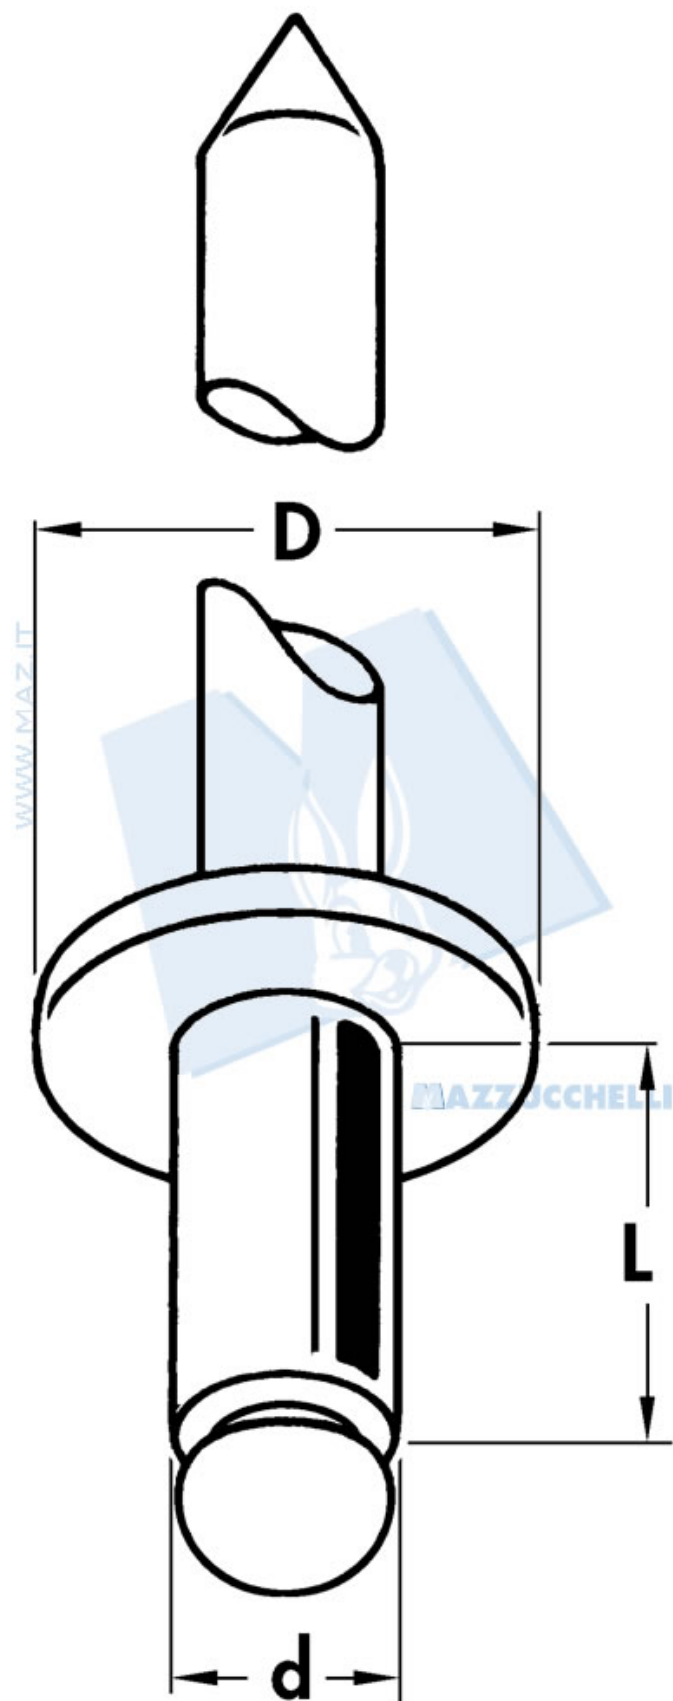

 Kg	 Kg	d	L	D	 mm	 mm min ÷ max
44 (431 N)	76 (744 N)	3.2	6	6.5	3.3	0.5 Æ 3
44 (431 N)	76 (744 N)	3.2	8	6.5	3.3	3 Æ 5
44 (431 N)	76 (744 N)	3.2	10	6.5	3.3	5 Æ 7
44 (431 N)	76 (744 N)	3.2	12	6.5	3.3	7 Æ 9
89 (872 N)	128 (1254 N)	4	6	8	4.1	0.5 Æ 2.5
89 (872 N)	128 (1254 N)	4	8	8	4.1	2.5 Æ 4.5
89 (872 N)	128 (1254 N)	4	10	8	4.1	4.5 Æ 6.5

		d	L	D	 mm	 mm min ÷ max
89 (872 N)	128 (1254 N)	4	12	8	4.1	6.5 Æ 8.5
89 (872 N)	128 (1254 N)	4	14	8	4.1	8.5 Æ 10.5
89 (872 N)	128 (1254 N)	4	16	8	4.1	10.5 Æ 12.5
89 (872 N)	128 (1254 N)	4	18	8	4.1	12.5 Æ 14.5
109 (1068 N)	157 (1538 N)	4.8	8	10	5	2 Æ 4
109 (1068 N)	157 (1538 N)	4.8	10	10	5	4 Æ 6
109 (1068 N)	157 (1538 N)	4.8	12	10	5	6 Æ 8
109 (1068 N)	157 (1535 N)	4.8	14	10	5	8 Æ 10
109 (1068 N)	157 (1538 N)	4.8	16	10	5	10 Æ 12
109 (1068 N)	157 (1538 N)	4.8	18	10	5	12 Æ 14