


articoli di fissaggio > rivetti a strappo in alluminio > rivetti a strappo in alluminio

Rivetti in lega di alluminio AlMg 3.5

Con chiodo in acciaio zincato

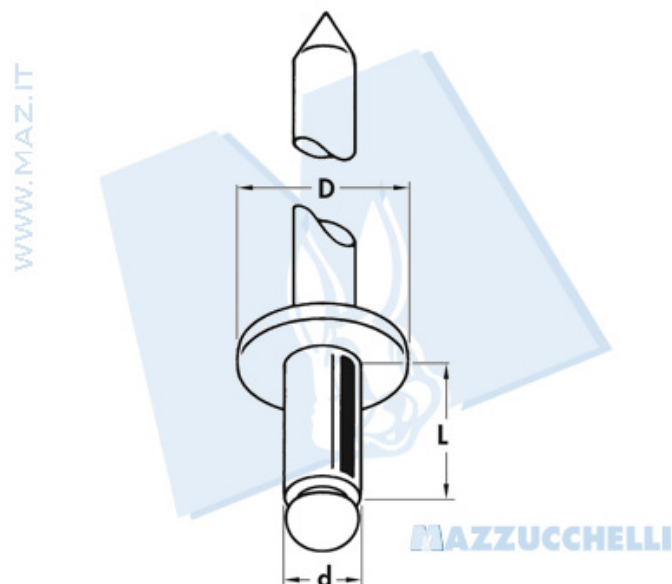


		d	L	D		
Kg	Kg				mm	mm min - max
35 (343 N)	45 (441 N)	2.4	6	5	2.5	0.5 Æ 3
35 (343 N)	45 (441 N)	2.4	8	5	2.5	3 Æ 5
35 (343 N)	45 (441 N)	2.4	10	5	2.5	5 Æ 7
35 (343 N)	45 (441 N)	2.4	12	5	2.5	7 Æ 9
65 (637 N)	90 (882 N)	3	5	6	3.1	0.5 Æ 2
65 (637 N)	90 (882 N)	3	6	6	3.1	1 Æ 3
65 (637 N)	90 (882 N)	3	7	6	3.1	2 Æ 4
65 (637 N)	90 (882 N)	3	8	6	3.1	3 Æ 5
65 (637 N)	90 (882 N)	3	9	6	3.1	4 Æ 6
65 (637 N)	90 (882 N)	3	10	6	3.1	5 Æ 7
65 (637 N)	90 (882 N)	3	11	6	3.1	6 Æ 8
65 (637 N)	90 (882 N)	3	12	6	3.1	7 Æ 9
65 (637 N)	90 (882 N)	3	14	6	3.1	9 Æ 11
65 (637 N)	90 (882 N)	3	16	6	3.1	11 Æ 13
65 (637 N)	90 (882 N)	3	18	6	3.1	13 Æ 15
70 (686 N)	100 (980 N)	3.2	5	6.5	3.3	0.5 Æ 2
70 (686 N)	100 (980 N)	3.2	6	6.5	3.3	1 Æ 3
70 (686 N)	100 (980 N)	3.2	7	6.5	3.3	2 Æ 4
70 (686 N)	100 (980 N)	3.2	8	6.5	3.3	3 Æ 5
70 (686 N)	100 (980 N)	3.2	9	6.5	3.3	4 Æ 6
70 (686 N)	100 (980 N)	3.2	10	6.5	3.3	5 Æ 7
70 (686 N)	100 (980 N)	3.2	11	6.5	3.3	6 Æ 8
70 (686 N)	100 (980 N)	3.2	12	6.5	3.3	7 Æ 9
70 (686 N)	100 (980 N)	3.2	14	6.5	3.3	9 Æ 11
70 (686 N)	100 (980 N)	3.2	16	6.5	3.3	11 Æ 13
70 (686 N)	100 (980 N)	3.2	18	6.5	3.3	13 Æ 15

*Disponibile solo su richiesta e per quantitativi minimi di 30.000 pz.

articoli di fissaggio > rivetti a strappo in alluminio > rivetti a strappo in alluminio

Rivetti in lega di alluminio AlMg 3.5

Con chiodo in acciaio zincato

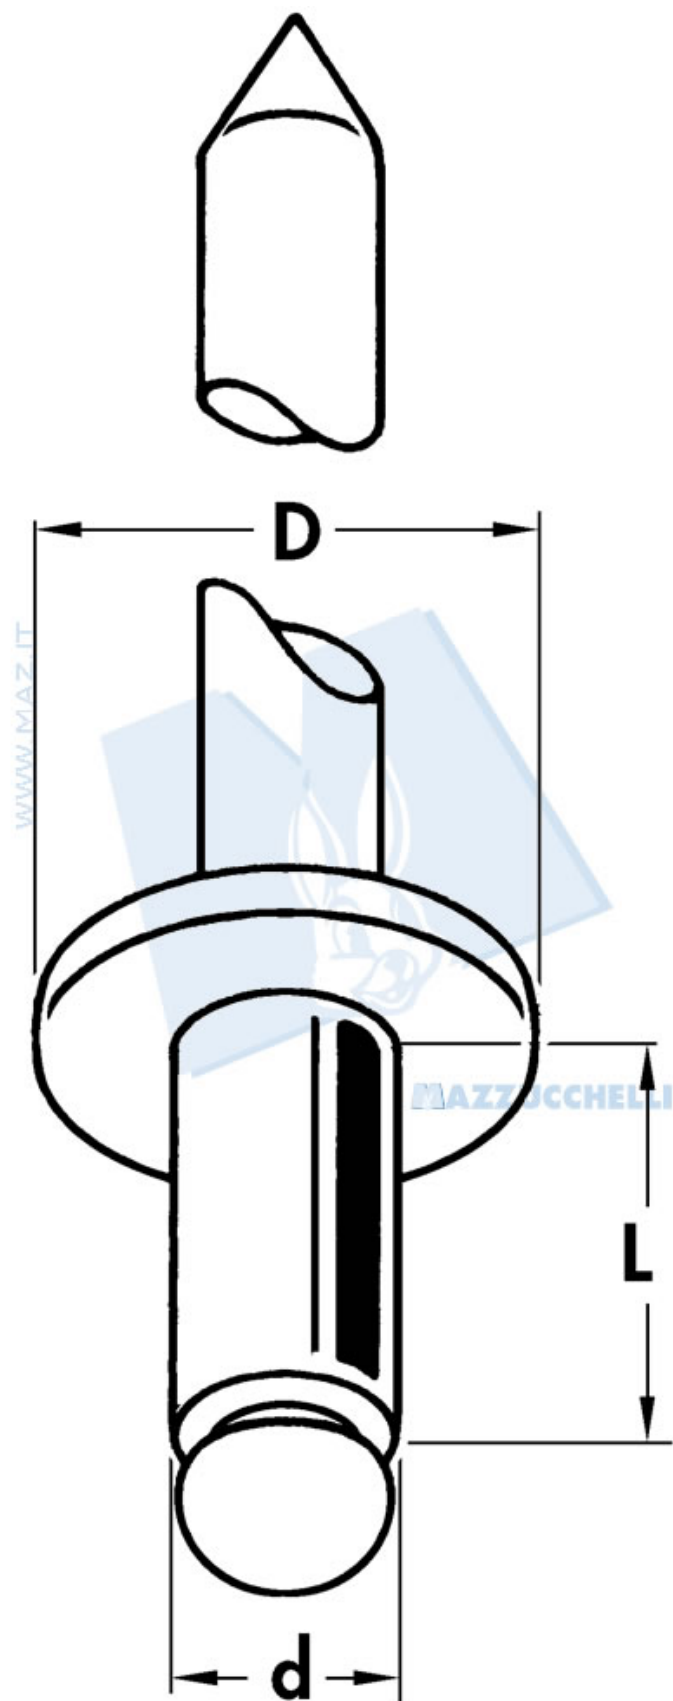

		d	L	D	 mm	 mm min ± max
75 (735 N)	110 (1078 N)	3.4	5	7	3.5	0.5 Æ 2
75 (735 N)	110 (1078 N)	3.4	6	7	3.5	1 Æ 3
75 (735 N)	110 (1078 N)	3.4	7	7	3.5	2 Æ 4
75 (735 N)	110 (1078 N)	3.4	8	7	3.5	3 Æ 5
75 (735 N)	110 (1078 N)	3.4	9	7	3.5	4 Æ 6
75 (735 N)	110 (1078 N)	3.4	10	7	3.5	5 Æ 7
75 (735 N)	110 (1078 N)	3.4	11	7	3.5	6 Æ 8


		d	L	D	 mm	 mm min + max
75 (735 N)	110 (1078 N)	3.4	12	7	3.5	7 Æ 9
75 (735 N)	110 (1078 N)	3.4	14	7	3.5	9 Æ 11
75 (735 N)	110 (1078 N)	3.4	16	7	3.5	11 Æ 13
75 (735 N)	110 (1078 N)	3.4	18	7	3.5	13 Æ 15
75 (735 N)	110 (1078 N)	*3.4	20	7	3.5	15 Æ 17
130 (1274 N)	185 (1813 N)	4	5	8	4.1	0.5 Æ 1.5
130 (1274 N)	185 (1813 N)	4	6	8	4.1	1.5 Æ 2.5
130 (1274 N)	185 (1813 N)	4	7	8	4.1	2.5 Æ 3.5
130 (1274 N)	185 (1813 N)	4	8	8	4.1	3.5 Æ 4.5
130 (1274 N)	185 (1813 N)	4	9	8	4.1	4.5 Æ 5.5
130 (1274 N)	185 (1813 N)	4	10	8	4.1	5.5 Æ 6.5
130 (1274 N)	185 (1813 N)	4	11	8	4.1	6.5 Æ 7.5
130 (1274 N)	185 (1813 N)	4	12	8	4.1	7.5 Æ 8.5
130 (1274 N)	185 (1813 N)	4	14	8	4.1	8.5 Æ 10.5
130 (1274 N)	185 (1813 N)	4	16	8	4.1	10.5 Æ 12.5
130 (1274 N)	185 (1813 N)	4	18	8	4.1	12.5 Æ 14.5
130 (1274 N)	185 (1813 N)	4	20	8	4.1	14.5 Æ 16.5
130 (1274 N)	185 (1813 N)	4	22	8	4.1	16.5 Æ 18.5
130 (1274 N)	185 (1813 N)	4	24	8	4.1	18.5 Æ 20.5
130 (1274 N)	185 (1813 N)	4	26	8	4.1	20.5 Æ 22.5
130 (1274 N)	185 (1813 N)	4	28	8	4.1	22.5 Æ 24.5
130 (1274 N)	185 (1813 N)	4	30	8	4.1	24.5 Æ 26.5

*Disponibile solo su richiesta e per quantitativi minimi di 30.000 pz.

articoli di fissaggio > rivetti a strappo in alluminio > rivetti a strappo in alluminio

Rivetti in lega di alluminio AlMg 3.5

Con chiodo in acciaio zincato

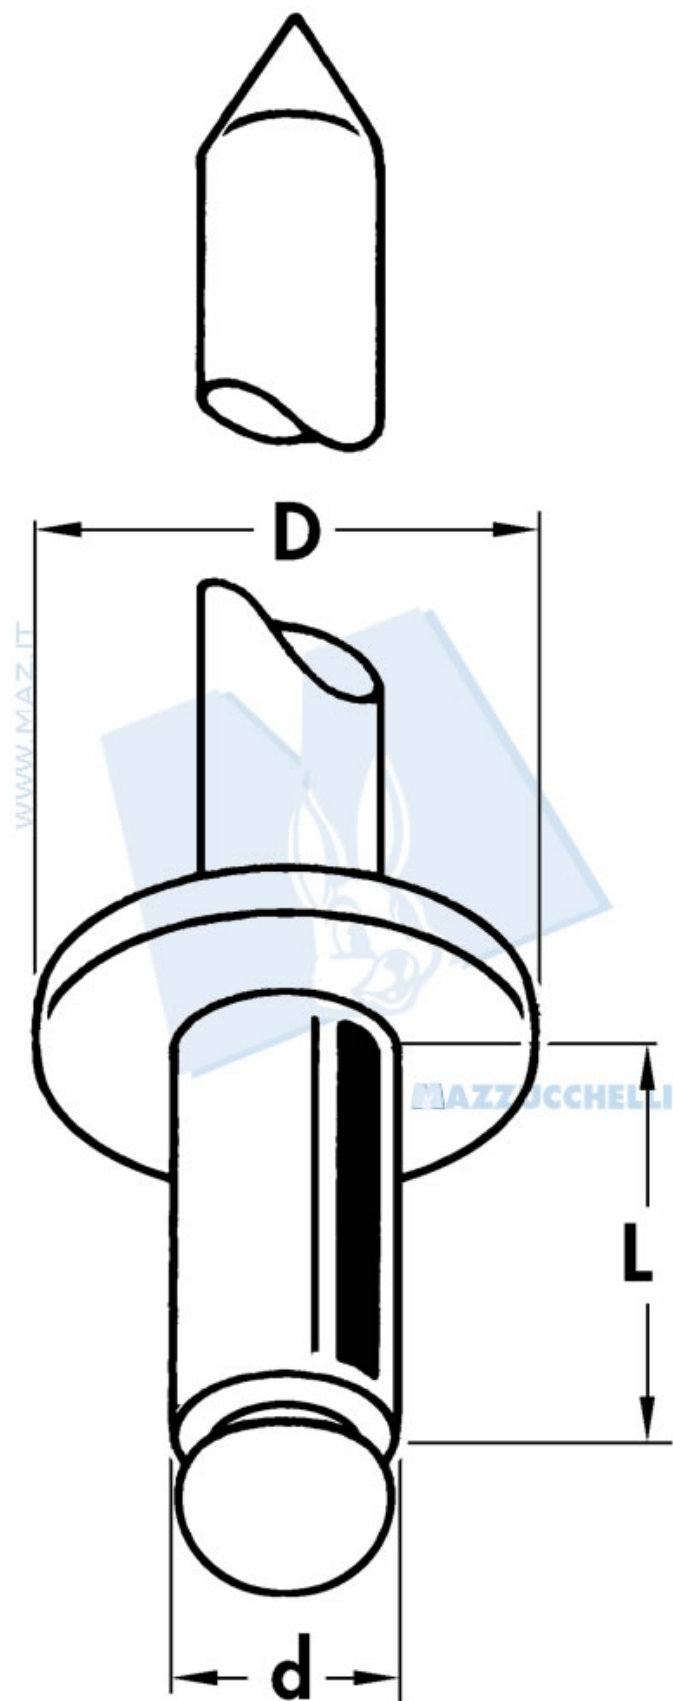


		d	L	D	 mm	 mm min ± max
223 (2185 N)	304 (2979 N)	4.8	6	10	5	0.5 Æ 2
223 (2185 N)	304 (2979 N)	4.8	7	10	5	2 Æ 3
223 (2185 N)	304 (2979 N)	4.8	8	10	5	3 Æ 4
223 (2185 N)	304 (2979 N)	4.8	9	10	5	4 Æ 5
223 (2185 N)	304 (2979 N)	4.8	10	10	5	5 Æ 6
223 (2185 N)	304 (2979 N)	4.8	11	10	5	6 Æ 7
223 (2185 N)	304 (2979 N)	4.8	12	10	5	7 Æ 8

		d	L	D	 mm	 mm min + max
223 (2185 N)	304 (2979 N)	4.8	14	10	5	8 Å· 10
223 (2185 N)	304 (2979 N)	4.8	16	10	5	10 Å· 12
223 (2185 N)	304 (2979 N)	4.8	18	10	5	12 Å· 14
223 (2185 N)	304 (2979 N)	4.8	20	10	5	14 Å· 16
223 (2185 N)	304 (2979 N)	4.8	22	10	5	16 Å· 18
223 (2185 N)	304 (2979 N)	4.8	24	10	5	18 Å· 20
223 (2185 N)	304 (2979 N)	4.8	26	10	5	20 Å· 22
223 (2185 N)	304 (2979 N)	4.8	28	10	5	22 Å· 24
223 (2185 N)	304 (2979 N)	4.8	30	10	5	24 Å· 26
223 (2185 N)	304 (2979 N)	4.8	35	10	5	26 Å· 31
223 (2185 N)	304 (2979 N)	4.8	40	10	5	31 Å· 36
223 (2185 N)	304 (2979 N)	4.8	45	10	5	36 Å· 41
223 (2185 N)	304 (2979 N)	4.8	50	10	5	41 Å· 46

articoli di fissaggio > rivetti a strappo in alluminio > rivetti a strappo in alluminio

Rivetti in lega di alluminio AlMg 5

Con chiodo in acciaio zincato

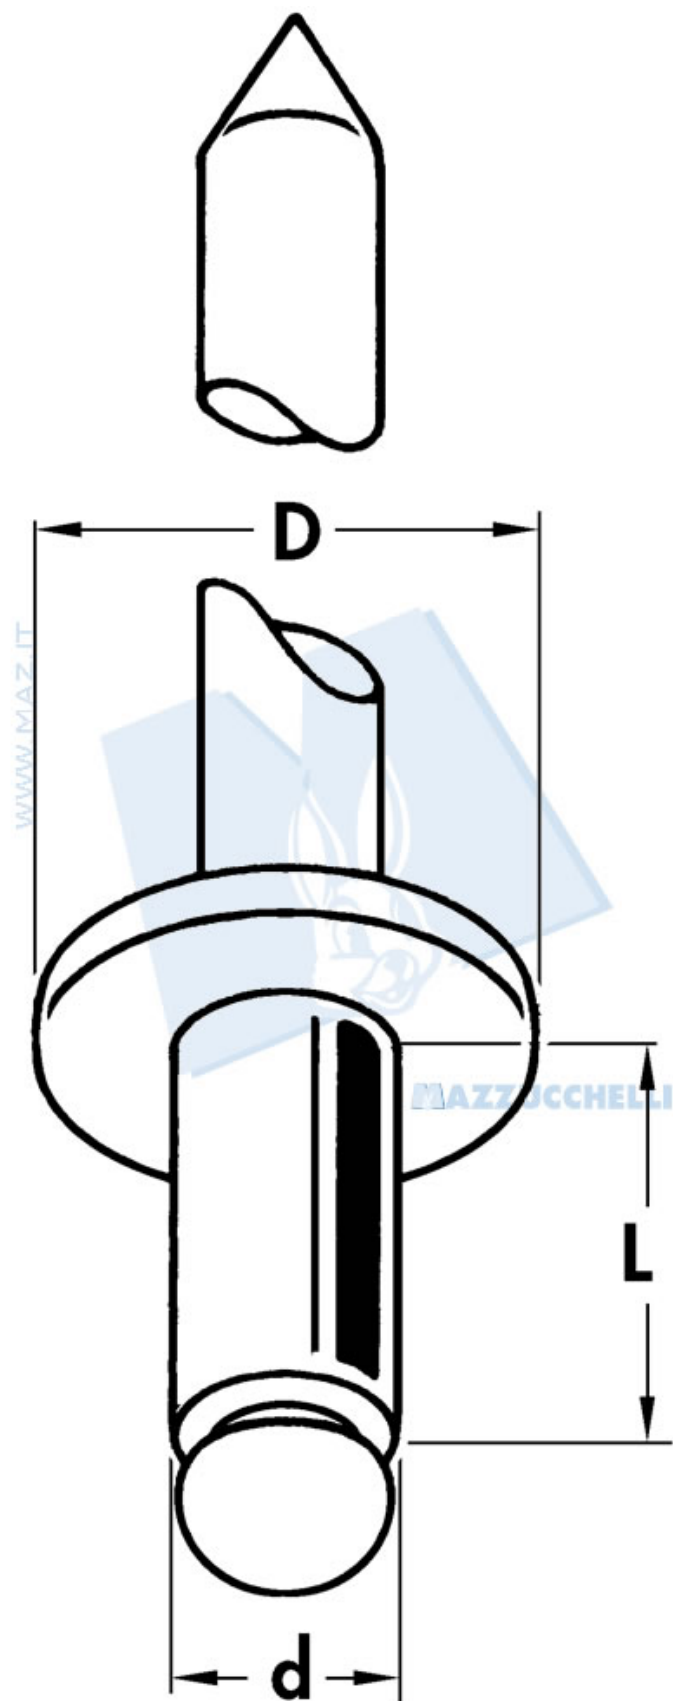


 Kg	 Kg	d	L	D	 mm	 mm min ± max
280 (2744 N)	433 (4341 N)	6	8	12	6.1	2 Æ 3
280 (2744 N)	433 (4341 N)	6	10	12	6.1	3 Æ 5
280 (2744 N)	433 (4341 N)	6	12	12	6.1	5 Æ 7
280 (2744 N)	433 (4341 N)	6	15	12	6.1	7 Æ 10
280 (2744 N)	433 (4341 N)	6	18	12	6.1	10 Æ 13
280 (2744 N)	433 (4341 N)	6	22	12	6.1	13 Æ 17
280 (2744 N)	433 (4341 N)	6	26	12	6.1	17 Æ 21

		d	L	D		
280 (2744 N)	433 (4341 N)	6	30	12	6.1	21 Å· 25
280 (2744 N)	433 (4341 N)	6	35	12	6.1	25 Å· 30
280 (2744 N)	433 (4341 N)	6	40	12	6.1	30 Å· 35
380 (3724 N)	632 (6193 N)	6.4	8	12	6.5	2 Å· 3
380 (3724 N)	632 (6193 N)	6.4	10	12	6.5	3 Å· 5
380 (3724 N)	632 (6193 N)	6.4	12	12	6.5	5 Å· 7
380 (3724 N)	632 (6193 N)	6.4	15	12	6.5	7 Å· 10
380 (3724 N)	632 (6193 N)	6.4	18	12	6.5	10 Å· 13
380 (3724 N)	632 (6193 N)	6.4	22	12	6.5	13 Å· 17
380 (3724 N)	632 (6193 N)	6.4	26	12	6.5	17 Å· 21
380 (3724 N)	632 (6193 N)	6.4	30	12	6.5	21 Å· 25
380 (3724 N)	632 (6193 N)	6.4	35	12	6.5	25 Å· 30
380 (3724 N)	632 (6193 N)	6.4	40	12	6.5	30 Å· 35
677 (6634 N)	979 (9594 N)	7.8	15	14	8	4 Å· 9.5
677 (6634 N)	979 (9594 N)	7.8	18	14	8	9.5 Å· 12.5
677 (6634 N)	979 (9594 N)	7.8	22	14	8	12.5 Å· 16.5
677 (6634 N)	979 (9594 N)	7.8	26	14	8	16.5 Å· 20.5
677 (6634 N)	979 (9594 N)	7.8	30	14	8	20.5 Å· 24.5
677 (6634 N)	979 (9594 N)	7.8	35	14	8	24.5 Å· 29.5
677 (6634 N)	979 (9594 N)	7.8	40	14	8	29.5 Å· 34.5

articoli di fissaggio > rivetti a strappo in alluminio > rivetti a strappo in alluminio

Rivetti in lega di alluminio AlMg 3.5

A testa larga

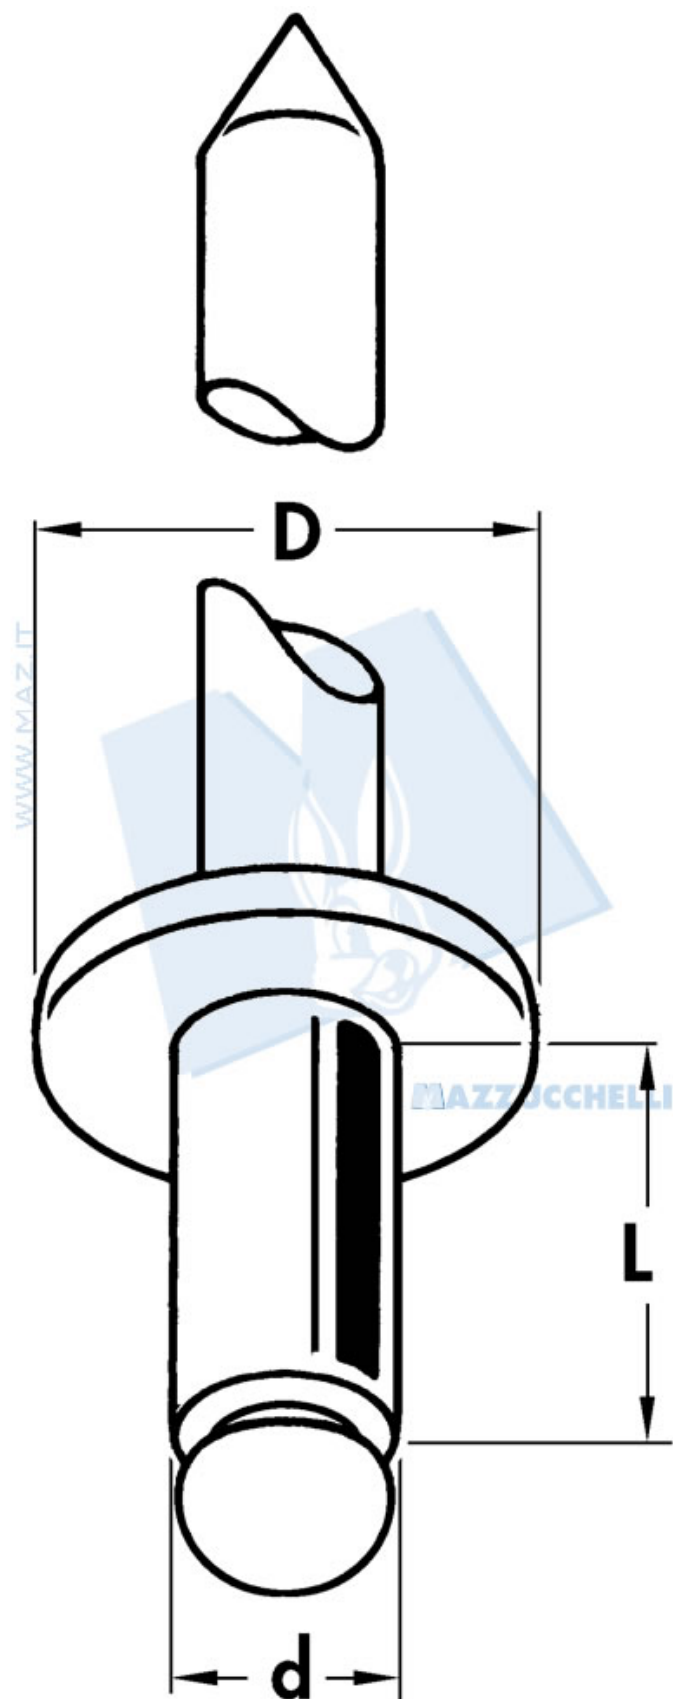


 Kg	 Kg	d	L	D	 mm	 mm min ÷ max
70 (686 N)	100 (980 N)	3.2	8	10	3.3	3 Æ 5
70 (686 N)	100 (980 N)	3.2	10	10	3.3	5 Æ 7
70 (686 N)	100 (980 N)	3.2	12	10	3.3	7 Æ 9
70 (686 N)	100 (980 N)	3.2	14	10	3.3	9 Æ 11
130 (1274 N)	185 (1813 N)	4	7	10	4.1	2.5 Æ 3.5
130 (1274 N)	185 (1813 N)	4	9	10	4.1	4.5 Æ 5.5
130 (1274 N)	185 (1813 N)	4	9	10	4.1	4.5 Æ 5.5

		d	L	D	 mm	 mm min ÷ max
130 (1274 N)	185 (1813 N)	4	11	10	4.1	5.5 Æ 7.5
130 (1274 N)	185 (1813 N)	4	13	10	4.1	7.5 Æ 9.5
223 (2185 N)	304 (2979 N)	4.8	8	14	5	3 Æ 4
223 (2185 N)	304 (2979 N)	4.8	9	14	5	4 Æ 5
223 (2185 N)	304 (2979 N)	4.8	10	14	5	5 Æ 6
223 (2185 N)	304 (2979 N)	4.8	12	14	5	6 Æ 8
223 (2185 N)	304 (2979 N)	4.8	14	14	5	8 Æ 10
223 (2185 N)	304 (2979 N)	4.8	16	14	5	10 Æ 12
223 (2185 N)	304 (2979 N)	4.8	18	14	5	12 Æ 14
223 (2185 N)	304 (2979 N)	4.8	20	14	5	14 Æ 16
223 (2185 N)	304 (2979 N)	4.8	22	14	5	16 Æ 18
223 (2185 N)	304 (2979 N)	4.8	24	14	5	18 Æ 20
223 (2185 N)	304 (2979 N)	4.8	26	14	5	20 Æ 22
223 (2185 N)	304 (2979 N)	4.8	28	14	5	22 Æ 24
223 (2185 N)	304 (2979 N)	4.8	30	14	5	24 Æ 26
223 (2185 N)	304 (2979 N)	4.8	35	14	5	26 Æ 31

articoli di fissaggio > rivetti a strappo in alluminio > rivetti a strappo in alluminio

Rivetti in lega di alluminio AlMg 3.5

A testa larga

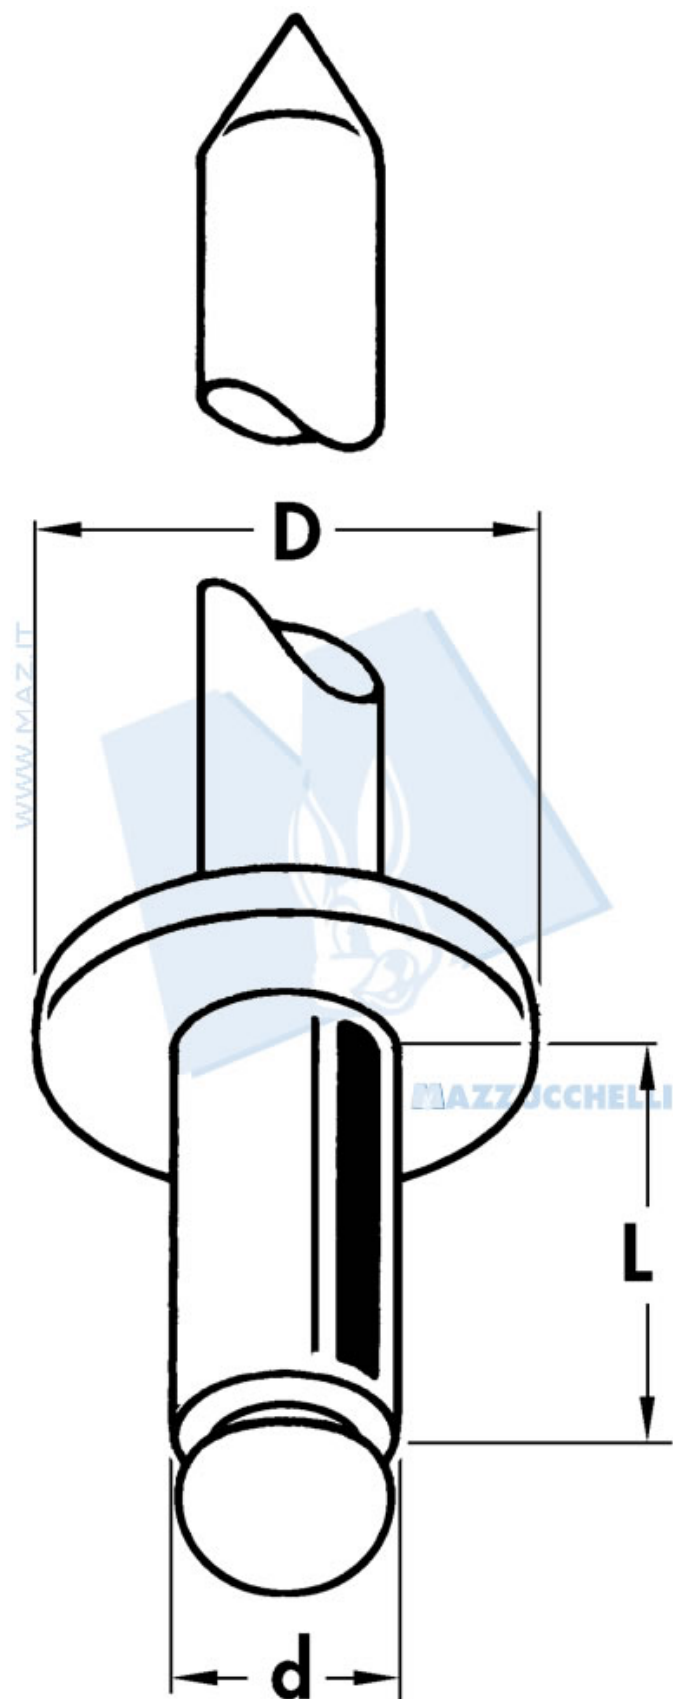

 Kg	 Kg	d	L	D	 mm	 mm min ± max
223 (2185 N)	304 (2979 N)	4.8	10	16	5	5 Æ 6
223 (2185 N)	304 (2979 N)	4.8	12	16	5	6 Æ 8
223 (2185 N)	304 (2979 N)	4.8	14	16	5	8 Æ 10
223 (2185 N)	304 (2979 N)	4.8	16	16	5	10 Æ 12
223 (2185 N)	304 (2979 N)	4.8	18	16	5	12 Æ 14
223 (2185 N)	304 (2979 N)	4.8	20	16	5	14 Æ 16
223 (2185 N)	304 (2979 N)	4.8	22	16	5	16 Æ 18


		d	L	D	 mm	 mm min + max
223 (2185 N)	304 (2979 N)	4.8	24	16	5	18 Æ 20
223 (2185 N)	304 (2979 N)	4.8	26	16	5	20 Æ 22
223 (2185 N)	304 (2979 N)	4.8	28	16	5	22 Æ 24
223 (2185 N)	304 (2979 N)	4.8	30	16	5	24 Æ 26
223 (2185 N)	304 (2979 N)	4.8	35	16	5	26 Æ 31

articoli di fissaggio > rivetti a strappo in alluminio > rivetti a strappo in alluminio

Rivetti a testa svasata in lega di alluminio AlMg

3.5

Con chiodo in acciaio zincato

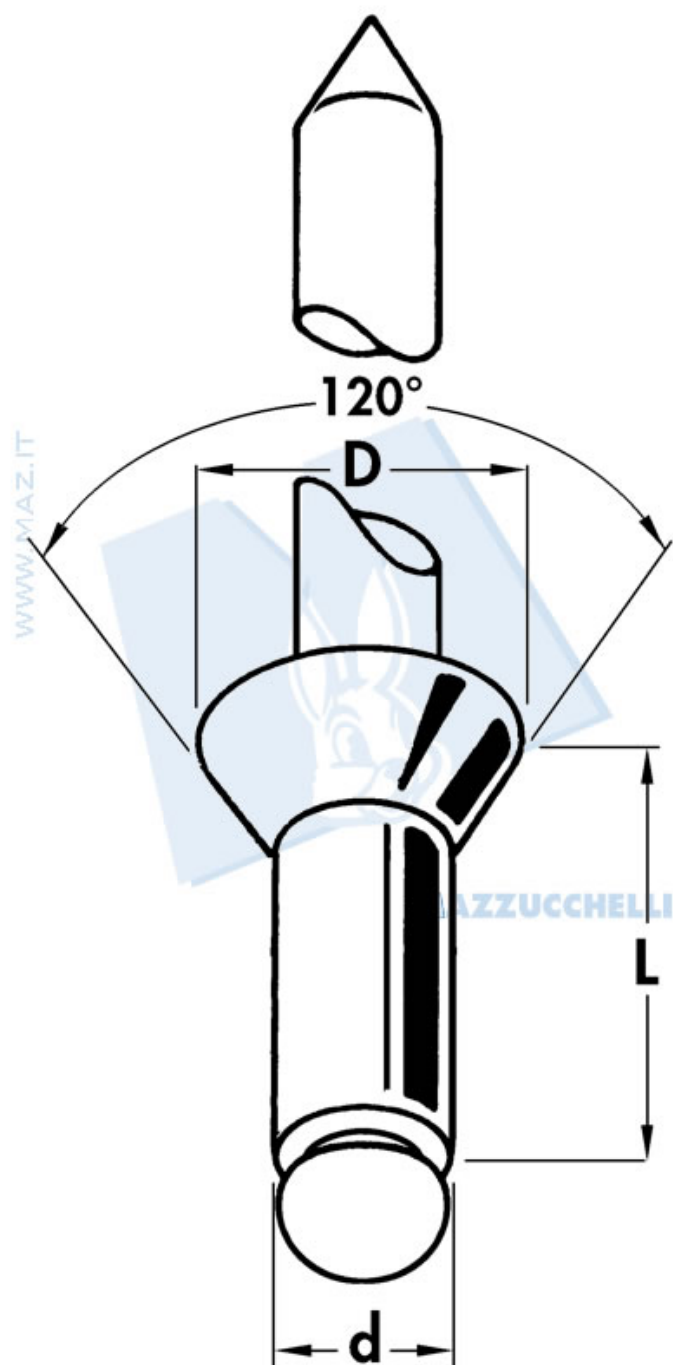


		d	L	D		
70 (686 N)	100 (980 N)	3.2	7	6.5	3.3	2 Å· 4
70 (686 N)	100 (980 N)	3.2	9	6.5	3.3	4 Å· 6
70 (686 N)	100 (980 N)	3.2	11	6.5	3.3	6 Å· 8
70 (686 N)	100 (980 N)	3.2	13	6.5	3.3	8 Å· 10
130 (1274 N)	185 (1813 N)	4	7	8	4.1	3 Å· 4
130 (1274 N)	185 (1813 N)	4	9	8	4.1	4 Å· 6
130 (1274 N)	185 (1813 N)	4	11	8	4.1	6 Å· 8
130 (1274 N)	185 (1813 N)	4	12	8	4.1	8 Å· 9
130 (1274 N)	185 (1813 N)	4	14	8	4.1	9 Å· 11
130 (1274 N)	185 (1813 N)	4	16	8	4.1	11 Å· 13
130 (1274 N)	185 (1813 N)	4	18	8	4.1	13 Å· 15
130 (1274 N)	185 (1813 N)	4	20	8	4.1	15 Å· 17
223 (2185 N)	304 (2979 N)	4.8	7	10	5	3 Å· 4
223 (2185 N)	304 (2979 N)	4.8	9	10	5	4 Å· 5
223 (2185 N)	304 (2979 N)	4.8	11	10	5	5 Å· 7
223 (2185 N)	304 (2979 N)	4.8	12	10	5	7 Å· 8
223 (2185 N)	304 (2979 N)	4.8	14	10	5	8 Å· 10
223 (2185 N)	304 (2979 N)	4.8	16	10	5	10 Å· 12
223 (2185 N)	304 (2979 N)	4.8	18	10	5	12 Å· 14
223 (2185 N)	304 (2979 N)	4.8	20	10	5	14 Å· 16

articoli di fissaggio > rivetti a strappo in alluminio > rivetti a strappo in alluminio

Rivetti in lega di alluminio AlMg 3.5


Anodizzati neri con testa larga

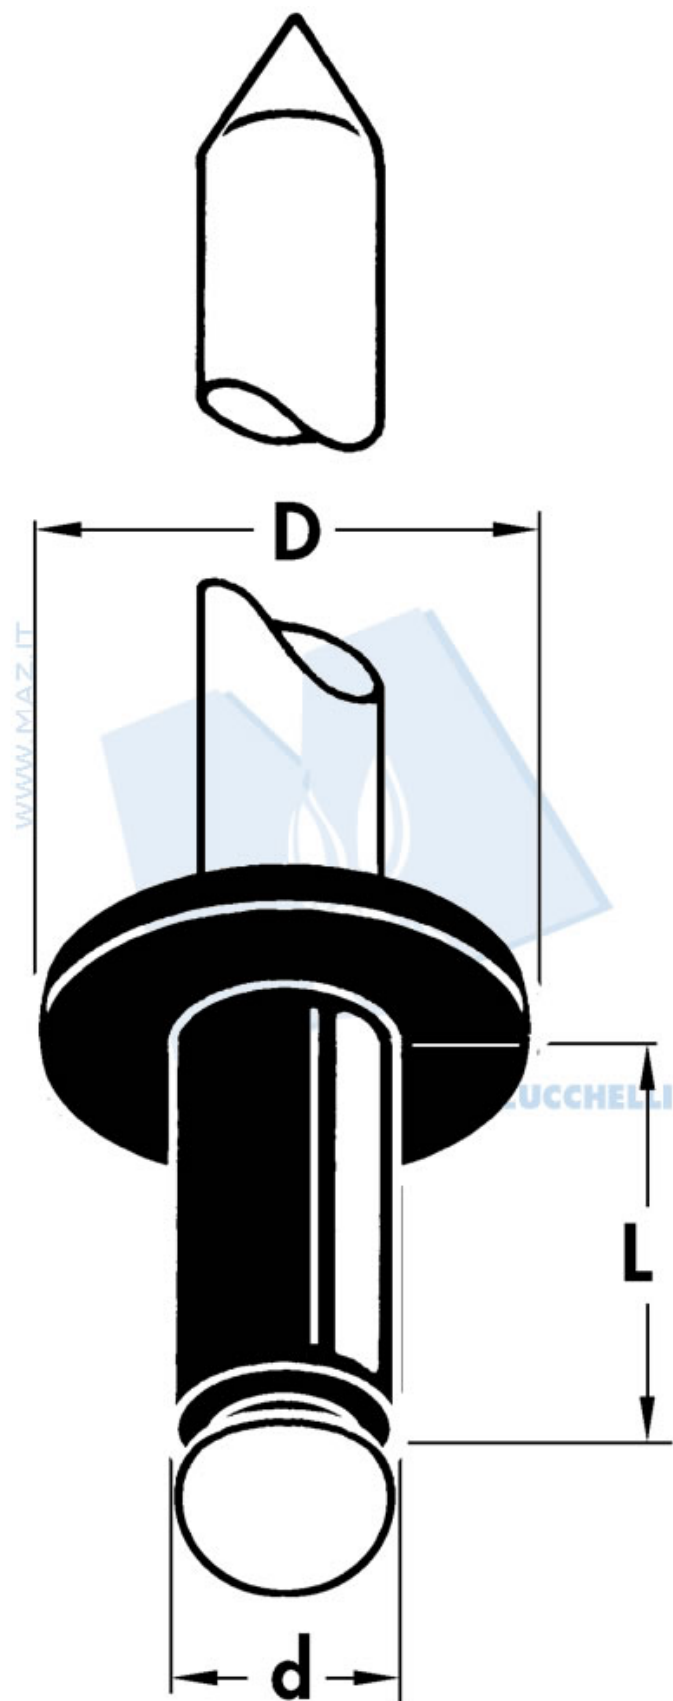

		d	L	D		
70 (686 N)	100 (980 N)	3.2	12	10	3.3	7 Æ 9
70 (686 N)	100 (980 N)	3.2	14	10	3.3	9 Æ 11
70 (686 N)	100 (980 N)	3.2	16	10	3.3	11 Æ 13
70 (686 N)	100 (980 N)	3.2	18	10	3.3	13 Æ 15
70 (686 N)	100 (980 N)	3.2	20	10	3.3	15 Æ 17

articoli di fissaggio > rivetti a strappo in alluminio > rivetti a strappo in alluminio

Rivetti tutto alluminio -
 Boccola AlMg 2
Chiodo AlMg 5

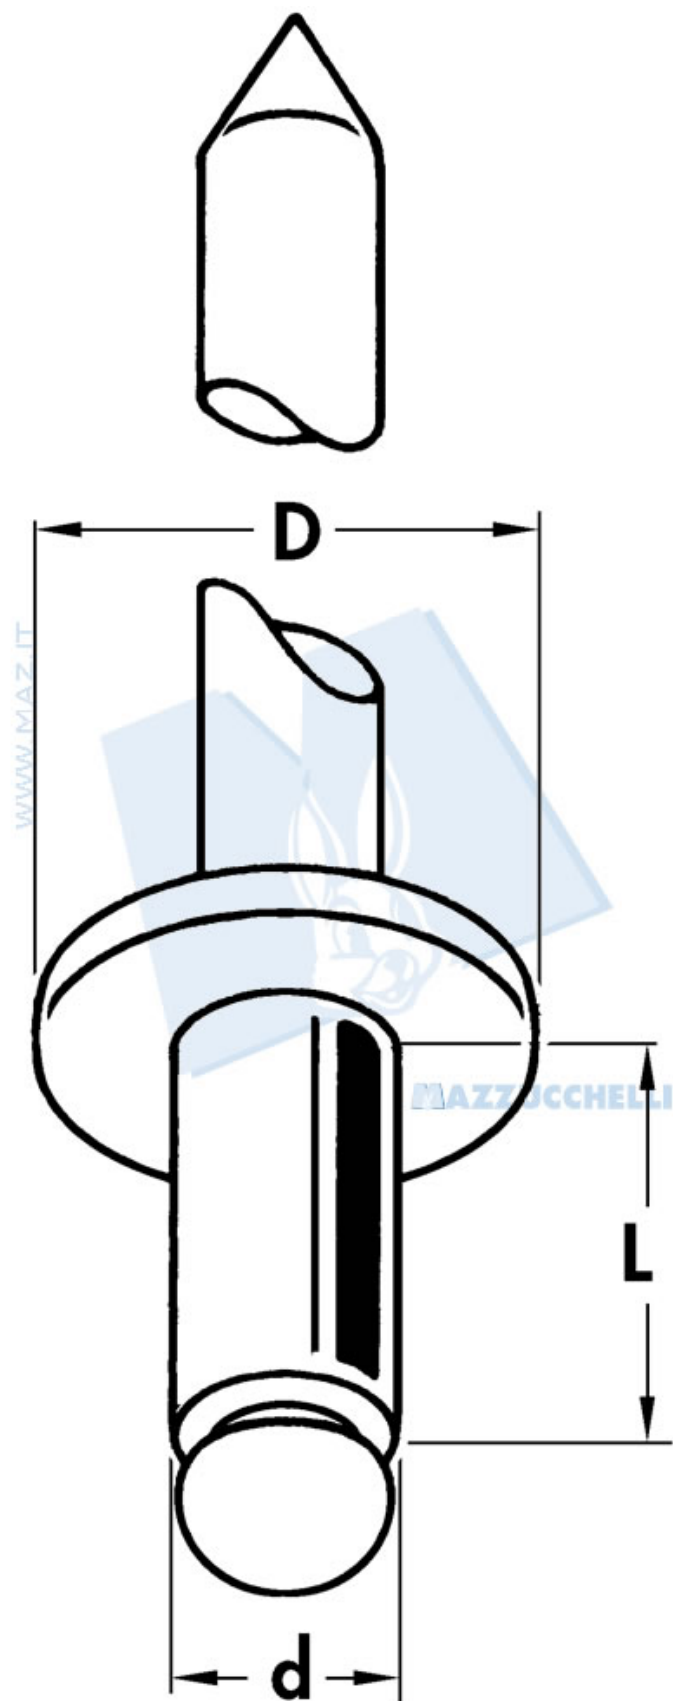

		d	L	D	 mm	 mm min ÷ max
44 (431 N)	76 (744 N)	3.2	6	6.5	3.3	0.5 Æ 3
44 (431 N)	76 (744 N)	3.2	8	6.5	3.3	3 Æ 5
44 (431 N)	76 (744 N)	3.2	10	6.5	3.3	5 Æ 7
44 (431 N)	76 (744 N)	3.2	12	6.5	3.3	7 Æ 9
89 (872 N)	128 (1254 N)	4	6	8	4.1	0.5 Æ 2.5
89 (872 N)	128 (1254 N)	4	8	8	4.1	2.5 Æ 4.5
89 (872 N)	128 (1254 N)	4	10	8	4.1	4.5 Æ 6.5

		d	L	D	 mm	 mm min ÷ max
89 (872 N)	128 (1254 N)	4	12	8	4.1	6.5 Æ 8.5
89 (872 N)	128 (1254 N)	4	14	8	4.1	8.5 Æ 10.5
89 (872 N)	128 (1254 N)	4	16	8	4.1	10.5 Æ 12.5
89 (872 N)	128 (1254 N)	4	18	8	4.1	12.5 Æ 14.5
109 (1068 N)	157 (1538 N)	4.8	8	10	5	2 Æ 4
109 (1068 N)	157 (1538 N)	4.8	10	10	5	4 Æ 6
109 (1068 N)	157 (1538 N)	4.8	12	10	5	6 Æ 8
109 (1068 N)	157 (1535 N)	4.8	14	10	5	8 Æ 10
109 (1068 N)	157 (1538 N)	4.8	16	10	5	10 Æ 12
109 (1068 N)	157 (1538 N)	4.8	18	10	5	12 Æ 14