


articoli di fissaggio > rivetti a strappo ermetici > rivetti a strappo ermetici

Rivetti ermetici AlMg 5

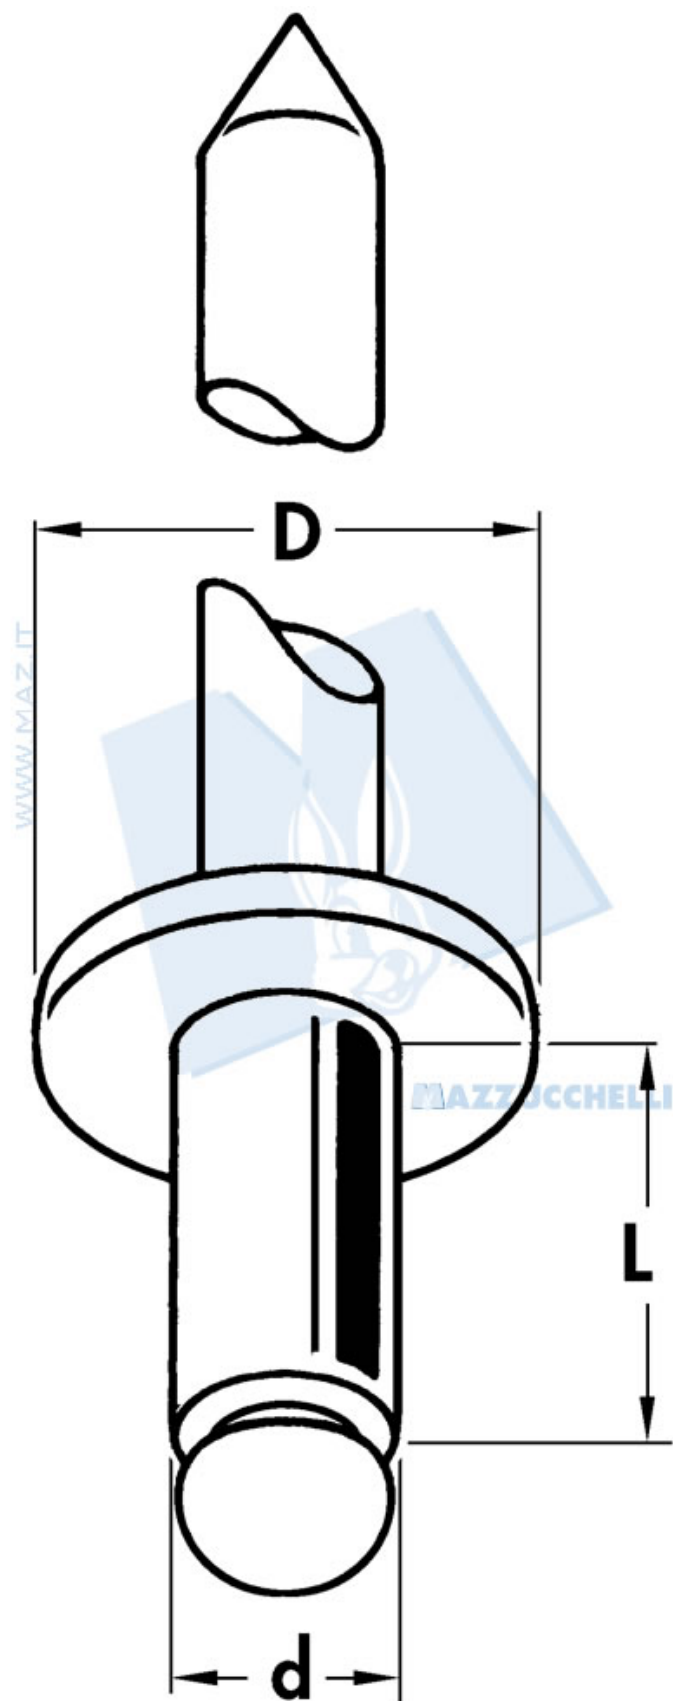


		d	L	D	 mm	 mm min ÷ max
105 (1029 N)	160 (1568 N)	3.2	6	6	3.3	0.8 Æ 2.0
105 (1029 N)	160 (1568 N)	3.2	8	6	3.3	2.0 Æ 3.5
105 (1029 N)	160 (1568 N)	3.2	9	6	3.3	3.5 Æ 4.5
105 (1029 N)	160 (1568 N)	3.2	11	6	3.3	4.5 Æ 6.5
105 (1029 N)	160 (1568 N)	3.2	13	6	3.3	6.5 Æ 8.5
155 (1519 N)	220 (2156 N)	4	8	8	4.1	0.8 Æ 3.5
155 (1519 N)	220 (2156 N)	4	10	8	4.1	3.5 Æ 5.5

		d	L	D	 mm	 mm min ÷ max
155 (1519 N)	220 (2156 N)	4	13	8	4.1	5.5 Æ 8.5
210 (2058 N)	310 (3038 N)	4.8	8	9.5	5	0.8 Æ 3.5
210 (2058 N)	310 (3038 N)	4.8	10	9.5	5	3.5 Æ 5.5
210 (2058 N)	310 (3038 N)	4.8	12	9.5	5	5.5 Æ 7.5
210 (2058 N)	310 (3038 N)	4.8	15	9.5	5	7.5 Æ 10.5
210 (2058 N)	310 (3038 N)	4.8	18	9.5	5	10.5 Æ 13.5
210 (2058 N)	310 (3038 N)	4.8	22	9.5	5	13.5 Æ 17.5

articoli di fissaggio > rivetti a strappo ermetici > rivetti a strappo ermetici

Rivetti ermetici a testa svasata alluminio AlMg 5

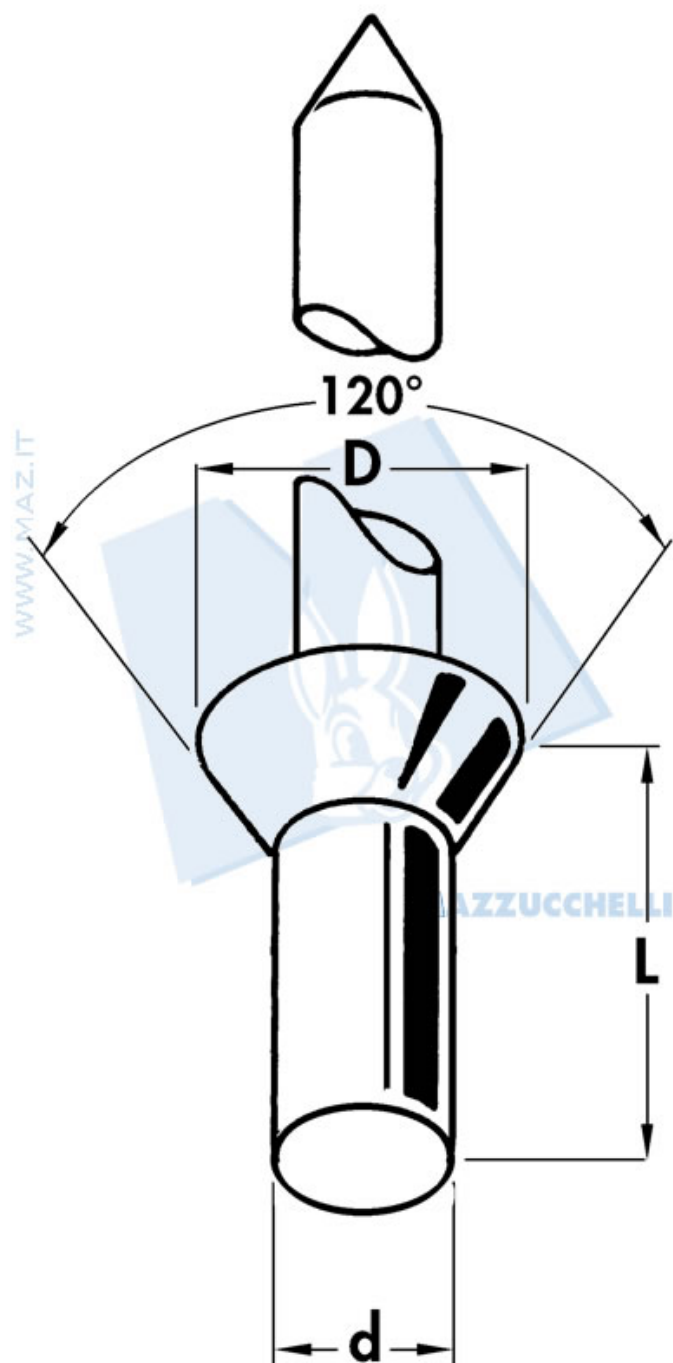


 Kg	 Kg	d	L	D	 mm	 mm min - max
105 (1029 N)	160 (1568 N)	3.2	7	6	3.3	1.7 Å 3.0
105 (1029 N)	160 (1568 N)	3.2	9	6	3.3	3.0 Å 4.5
105 (1029 N)	160 (1568 N)	3.2	10	6	3.3	4.5 Å 5.5

		d	L	D	 mm	 mm min ÷ max
105 (1029 N)	160 (1568 N)	3.2	12	6	3.3	5.5 Æ 7.5
105 (1029 N)	160 (1568 N)	3.2	13	6	3.3	7.5 Æ 8.5
155 (1519 N)	220 (2156 N)	4	9	8	4.1	2.8 Æ 4.5
155 (1519 N)	220 (2156 N)	4	11	8	4.1	4.5 Æ 6.5
155 (1519 N)	220 (2156 N)	4	12	8	4.1	6.5 Æ 7.5
155 (1519 N)	220 (2156 N)	4	14	8	4.1	7.5 Æ 9.5
210 (2058 N)	310 (3038 N)	4.8	9	9.5	5	3.0 Æ 4.5
210 (2058 N)	310 (3038 N)	4.8	11	9.5	5	4.5 Æ 6.5
210 (2058 N)	310 (3038 N)	4.8	12	9.5	5	6.5 Æ 7.5
210 (2058 N)	310 (3038 N)	4.8	14	9.5	5	7.5 Æ 9.5
210 (2058 N)	310 (3038 N)	4.8	15	9.5	5	9.5 Æ 10.5
210 (2058 N)	310 (3038 N)	4.8	19	9.5	5	10.5 Æ 14.5

articoli di fissaggio > rivetti a strappo ermetici > rivetti a strappo ermetici

Rivetti ermetici in alluminio AlMg 5

Con chiodo in acciaio inox

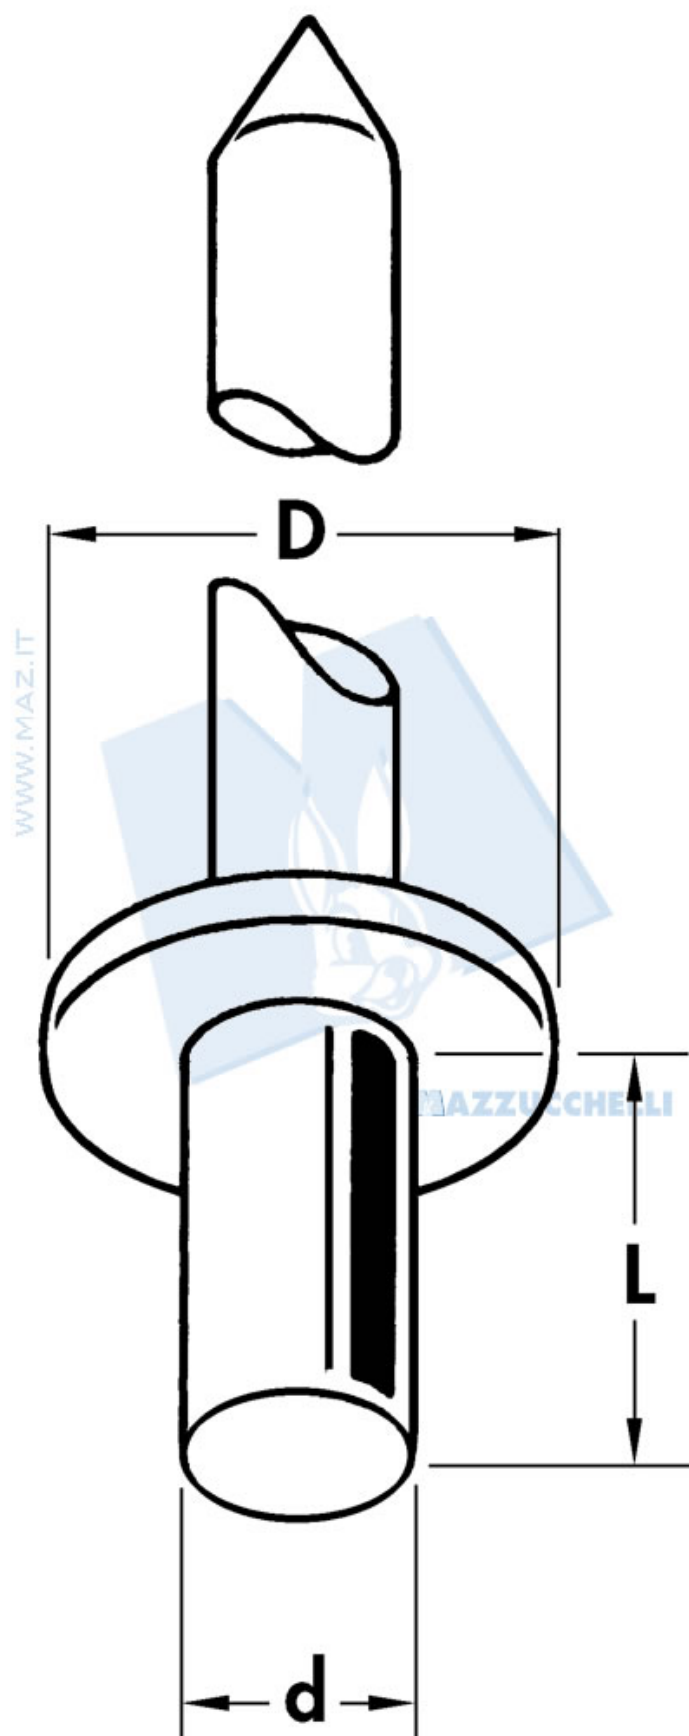


		d	L	D	 mm	 mm min ÷ max
105 (1029 N)	140 (1372 N)	3.2	6	6	3.3	0.8 Æ 2
105 (1029 N)	140 (1372 N)	3.2	8	6	3.3	2 Æ 3.5
105 (1029 N)	140 (1372 N)	3.2	9	6	3.3	3.5 Æ 4.5
105 (1029 N)	140 (1372 N)	3.2	11	6	3.3	4.5 Æ 6.5
105 (1029 N)	140 (1372 N)	3.2	12	6	3.3	6.5 Æ 7.5
155 (1519 N)	220 (2156 N)	4	8	8	4.1	0.8 Æ 3.5

		d	L	D	 mm	 mm min + max
155 (1519 N)	220 (2156 N)	4	9	8	4.1	3.5 Å 4.5
155 (1519 N)	220 (2156 N)	4	11	8	4.1	4.5 Å 6.5
155 (1519 N)	220 (2156 N)	4	12	8	4.1	6.5 Å 7.5
210 (2058 N)	310 (3038 N)	4.8	8	9.5	5	0.8 Å 3.5
210 (2058 N)	310 (3038 N)	4.8	9	9.5	5	3.5 Å 4.5
210 (2058 N)	310 (3038 N)	4.8	11	9.5	5	4.5 Å 6.5
210 (2058 N)	310 (3038 N)	4.8	12	9.5	5	6.5 Å 7.5
210 (2058 N)	310 (3038 N)	4.8	14	9.5	5	7.5 Å 9.5
210 (2058 N)	310 (3038 N)	4.8	16	9.5	5	9.5 Å 11.5
210 (2058 N)	310 (3038 N)	4.8	18	9.5	5	11.5 Å 13.5
210 (2058 N)	310 (3038 N)	4.8	21	9.5	5	13.5 Å 15.5

articoli di fissaggio > rivetti a strappo ermetici > rivetti a strappo ermetici

Rivetti ermetici in rame

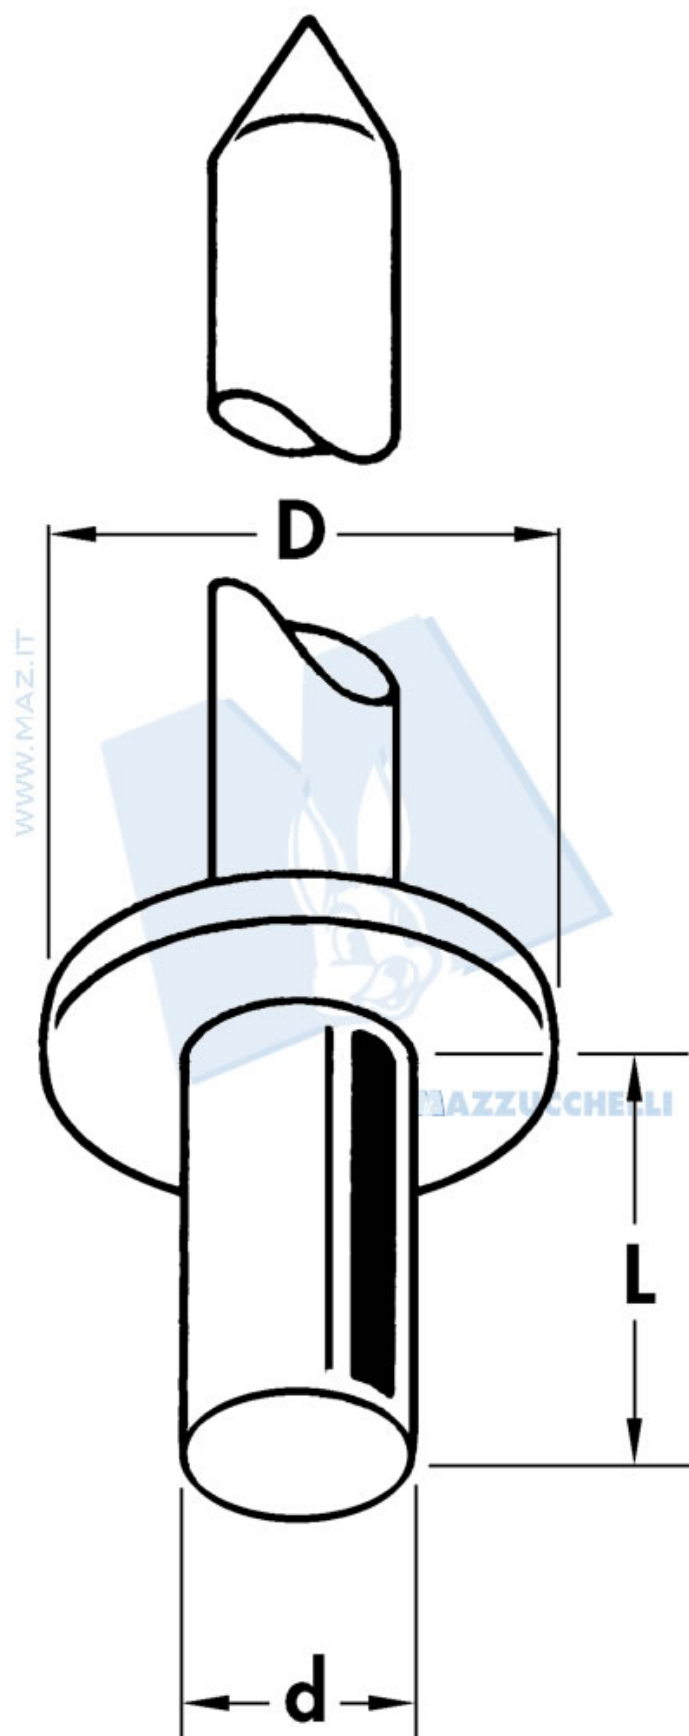

		d	L	D	 mm	 mm min - max
100 (980 N)	140 (1372 N)	3.2	8	6	3.3	0.8 - 3.5
100 (980 N)	140 (1372 N)	3.2	9	6	3.3	3.5 - 4.5
100 (980 N)	140 (1372 N)	3.2	12	6	3.3	4.5 - 7.5
145 (1421 N)	225 (2205 N)	4	8	8	4.1	0.8 - 3.5

		d	L	D	 mm	 mm min * max
145 (1421 N)	225 (2205 N)	4	10	8	4.1	3.5 Æ 5.5
195 (2058 N)	300 (3038 N)	4.8	9	9.5	5	0.8 Æ 4.5
195 (2058 N)	300 (3038 N)	4.8	11	9.5	5	4.5 Æ 6.5