


settore elettrico > capicorda preisolati, puntalini e capicorda di potenza > tubetti terminali preisolati

Tubetti terminali preisolati

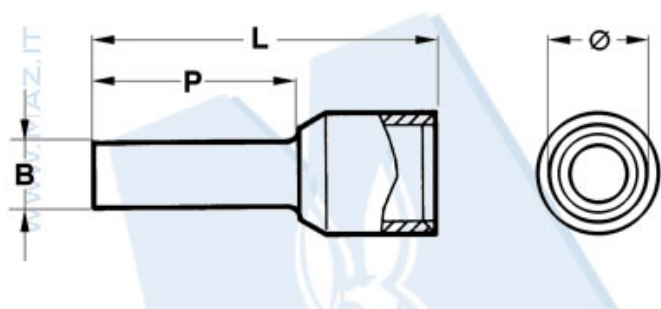

Codice Nr.	Colore	Sezione cavo	$\bar{A}_i$	B	P	L
PKE 308	Giallo - Yellow	0.1 $\bar{A}$ - 0.3	1.9	1.1	8.0	12.4
*PKE 508	Bianco - White	0.3 $\bar{A}$ - 0.5	2.6	1.3	8.0	14.0
PKE 7508	Blu - Blue	0.75	2.8	1.6	8.0	14.0
*PKE 108	Rosso - Red	1.0	3.0	1.8	8.0	14.0
*PKE 1508	Nero - Black	1.5	3.5	2.1	8.0	14.0
*PKE 1510	Nero - Black	1.5	3.5	2.1	10.0	16.4
*PKE 1518	Nero - Black	1.5	3.5	2.1	18.0	24.4
PKE 2508	Grigio - Grey	2.5	4.2	2.6	8.0	15.0
PKE 2512	Grigio - Grey	2.5	4.2	2.6	12.0	19.0
PKE 2518	Grigio - Grey	2.5	4.2	2.6	18.0	25.0
PKE 409	Arancio - Orange	4	4.8	3.3	10.0	17.0
PKE 412	Arancio - Orange	4	4.8	3.3	12.0	19.0
PKE 418	Arancio - Orange	4	4.8	3.3	18.0	25.0
PKE 612	Verde - Green	6	5.8	3.9	12.0	20.0
PKE 618	Verde - Green	6	5.8	3.9	18.0	26.0
PKE 1012	Marrone - Brown	10	7.4	4.8	12.0	21.5
PKE 1018	Marrone - Brown	10	7.4	4.8	18.0	27.5
PKE 1612	Bianco - White	16	8.8	5.9	12.0	22.7
PKE 1618	Bianco - White	16	8.8	5.9	18.0	28.6
PKE 25016	Nero - Black	25	10.0	7.9	16.0	29.0
PKE 25022	Nero - Black	25	10.0	7.9	22.0	35.0

*A norma DIN 46228/4