


articoli di fissaggio > rivetti a strappo in acciaio e ottone > rivetti a strappo in acciaio e ottone

Rivetti tutto acciaio zincato

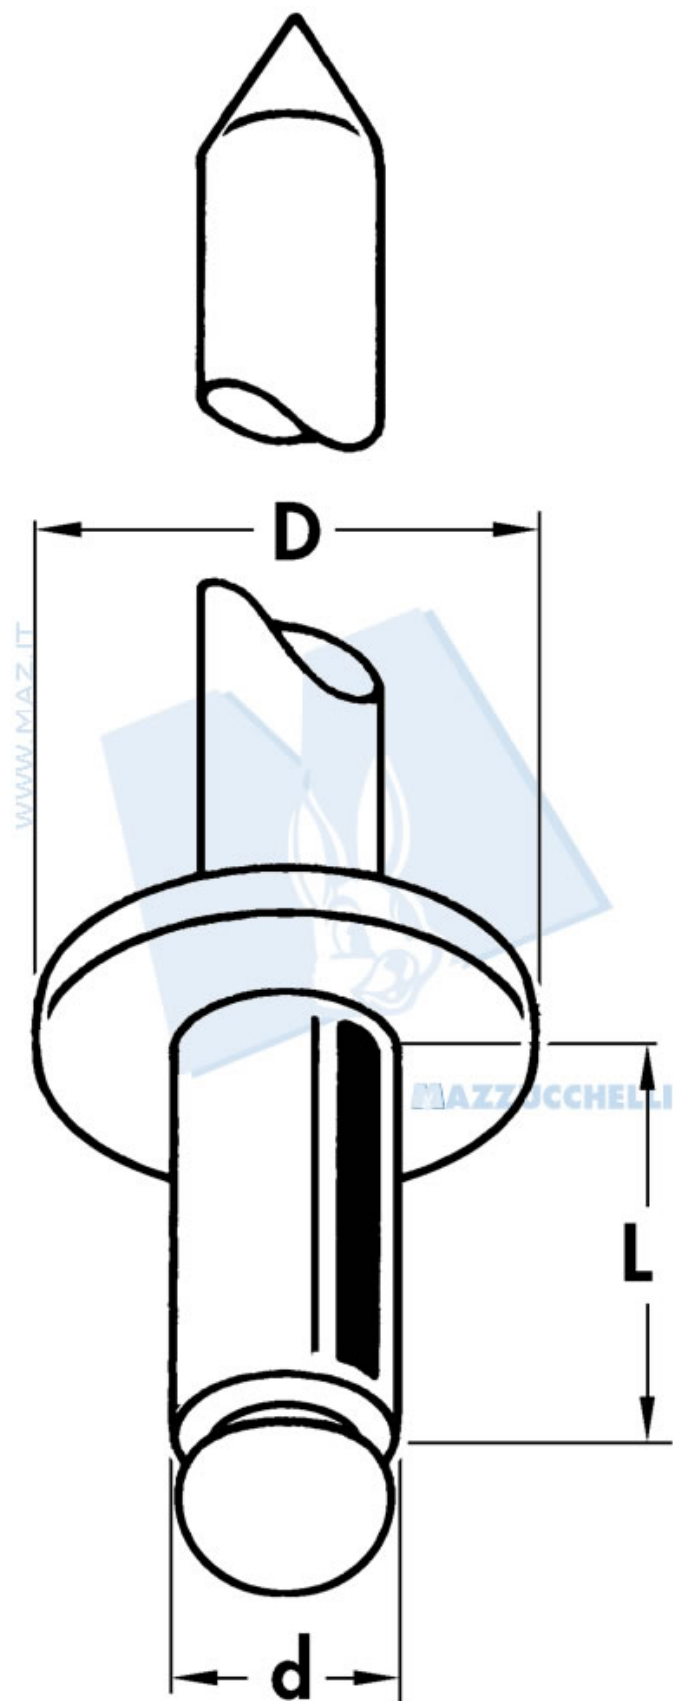

		d	L	D	 mm	 mm min ÷ max
100 (980 N)	127 (1244 N)	3	6	6	3.1	0.5 Æ 3
100 (980 N)	127 (1244 N)	3	7	6	3.1	3 Æ 4
100 (980 N)	127 (1244 N)	3	8	6	3.1	4 Æ 5
100 (980 N)	127 (1244 N)	3	9	6	3.1	5 Æ 6
100 (980 N)	127 (1244 N)	3	10	6	3.1	6 Æ 7
100 (980 N)	127 (1244 N)	3	11	6	3.1	7 Æ 8
100 (980 N)	127 (1244 N)	3	12	6	3.1	8 Æ 9

		d	L	D	 mm	 mm min ÷ max
125 (1225 N)	163 (1597 N)	3.2	6	6.5	3.3	0.5 Æ 3
125 (1225 N)	163 (1597 N)	3.2	7	6.5	3.3	3 Æ 4
125 (1225 N)	163 (1597 N)	3.2	8	6.5	3.3	4 Æ 5
125 (1225 N)	163 (1597 N)	3.2	9	6.5	3.3	5 Æ 6
125 (1225 N)	163 (1597 N)	3.2	10	6.5	3.3	6 Æ 7
125 (1225 N)	163 (1597 N)	3.2	11	6.5	3.3	7 Æ 8
125 (1225 N)	163 (1597 N)	3.2	12	6.5	3.3	8 Æ 9
195 (1911 N)	270 (2646 N)	4	6	8	4.1	0.5 Æ 2.5
195 (1911 N)	270 (2646 N)	4	7	8	4.1	2.5 Æ 3.5
195 (1911 N)	270 (2646 N)	4	8	8	4.1	3.5 Æ 4.5
195 (1911 N)	270 (2646 N)	4	9	8	4.1	4.5 Æ 5.5
195 (1911 N)	270 (2646 N)	4	10	8	4.1	5.5 Æ 6.5
195 (1911 N)	270 (2646 N)	4	11	8	4.1	6.5 Æ 7.5
195 (1911 N)	270 (2646 N)	4	12	8	4.1	7.5 Æ 8.5
195 (1911 N)	270 (2646 N)	4	14	8	4.1	8.5 Æ 10.5
195 (1911 N)	270 (2646 N)	4	16	8	4.1	10.5 Æ 12.5
195 (1911 N)	270 (2646 N)	4	18	8	4.1	12.5 Æ 14.5
195 (1911 N)	270 (2646 N)	4	20	8	4.1	14.5 Æ 16.5
195 (1911 N)	270 (2646 N)	4	24	8	4.1	16.5 Æ 20.5
195 (1911 N)	270 (2646 N)	4	30	8	4.2	20.5 Æ 26.5