


articoli di fissaggio > rivetti a strappo in acciaio e ottone > rivetti a strappo in acciaio e ottone

Rivetti tutto acciaio zincato

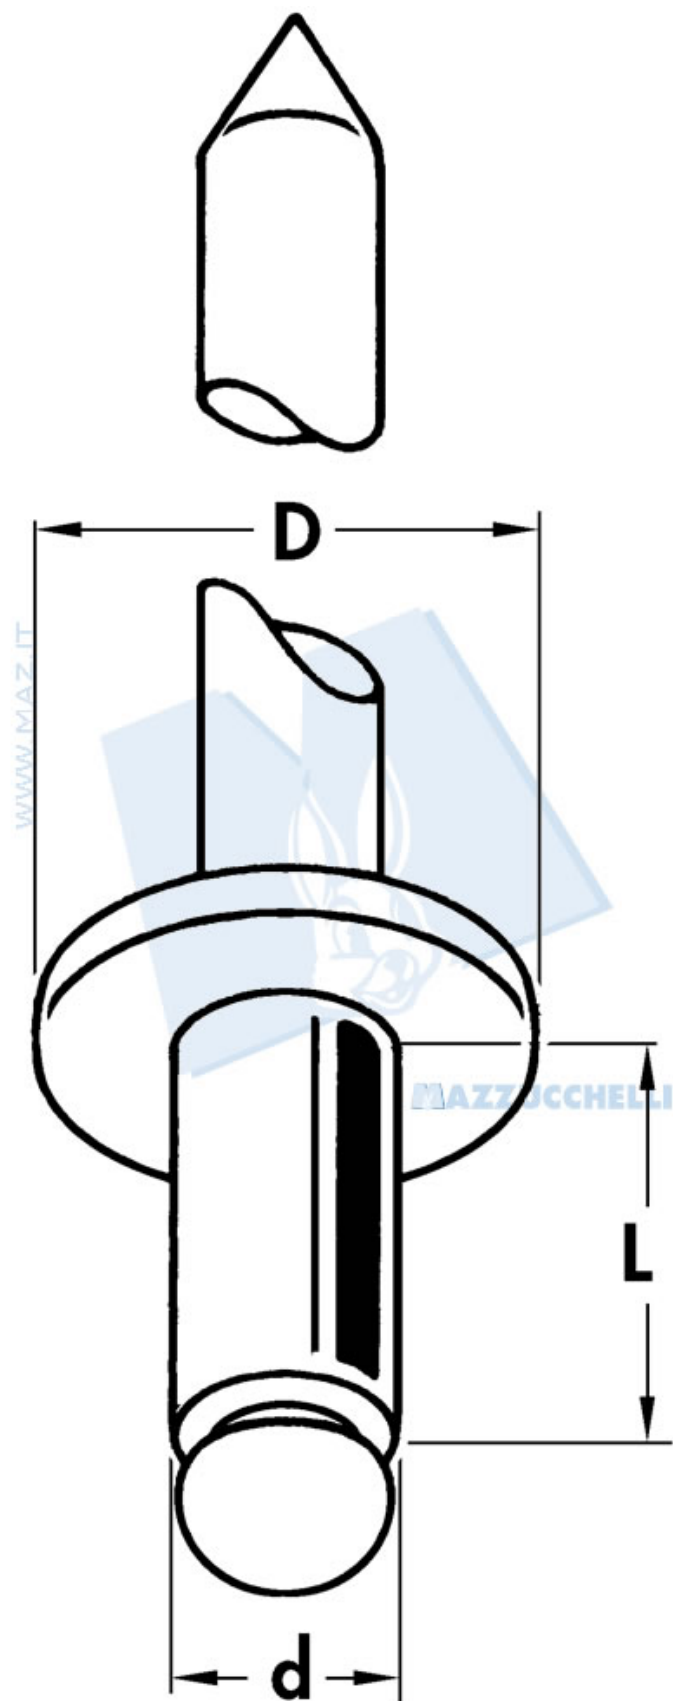


		d	L	D	 mm	 mm min ÷ max
100 (980 N)	127 (1244 N)	3	6	6	3.1	0.5 Æ 3
100 (980 N)	127 (1244 N)	3	7	6	3.1	3 Æ 4
100 (980 N)	127 (1244 N)	3	8	6	3.1	4 Æ 5
100 (980 N)	127 (1244 N)	3	9	6	3.1	5 Æ 6
100 (980 N)	127 (1244 N)	3	10	6	3.1	6 Æ 7
100 (980 N)	127 (1244 N)	3	11	6	3.1	7 Æ 8
100 (980 N)	127 (1244 N)	3	12	6	3.1	8 Æ 9

		d	L	D	 mm	 mm min ÷ max
125 (1225 N)	163 (1597 N)	3.2	6	6.5	3.3	0.5 Æ 3
125 (1225 N)	163 (1597 N)	3.2	7	6.5	3.3	3 Æ 4
125 (1225 N)	163 (1597 N)	3.2	8	6.5	3.3	4 Æ 5
125 (1225 N)	163 (1597 N)	3.2	9	6.5	3.3	5 Æ 6
125 (1225 N)	163 (1597 N)	3.2	10	6.5	3.3	6 Æ 7
125 (1225 N)	163 (1597 N)	3.2	11	6.5	3.3	7 Æ 8
125 (1225 N)	163 (1597 N)	3.2	12	6.5	3.3	8 Æ 9
195 (1911 N)	270 (2646 N)	4	6	8	4.1	0.5 Æ 2.5
195 (1911 N)	270 (2646 N)	4	7	8	4.1	2.5 Æ 3.5
195 (1911 N)	270 (2646 N)	4	8	8	4.1	3.5 Æ 4.5
195 (1911 N)	270 (2646 N)	4	9	8	4.1	4.5 Æ 5.5
195 (1911 N)	270 (2646 N)	4	10	8	4.1	5.5 Æ 6.5
195 (1911 N)	270 (2646 N)	4	11	8	4.1	6.5 Æ 7.5
195 (1911 N)	270 (2646 N)	4	12	8	4.1	7.5 Æ 8.5
195 (1911 N)	270 (2646 N)	4	14	8	4.1	8.5 Æ 10.5
195 (1911 N)	270 (2646 N)	4	16	8	4.1	10.5 Æ 12.5
195 (1911 N)	270 (2646 N)	4	18	8	4.1	12.5 Æ 14.5
195 (1911 N)	270 (2646 N)	4	20	8	4.1	14.5 Æ 16.5
195 (1911 N)	270 (2646 N)	4	24	8	4.1	16.5 Æ 20.5
195 (1911 N)	270 (2646 N)	4	30	8	4.2	20.5 Æ 26.5

articoli di fissaggio > rivetti a strappo in acciaio e ottone > rivetti a strappo in acciaio e ottone

Rivetti tutto acciaio zincato

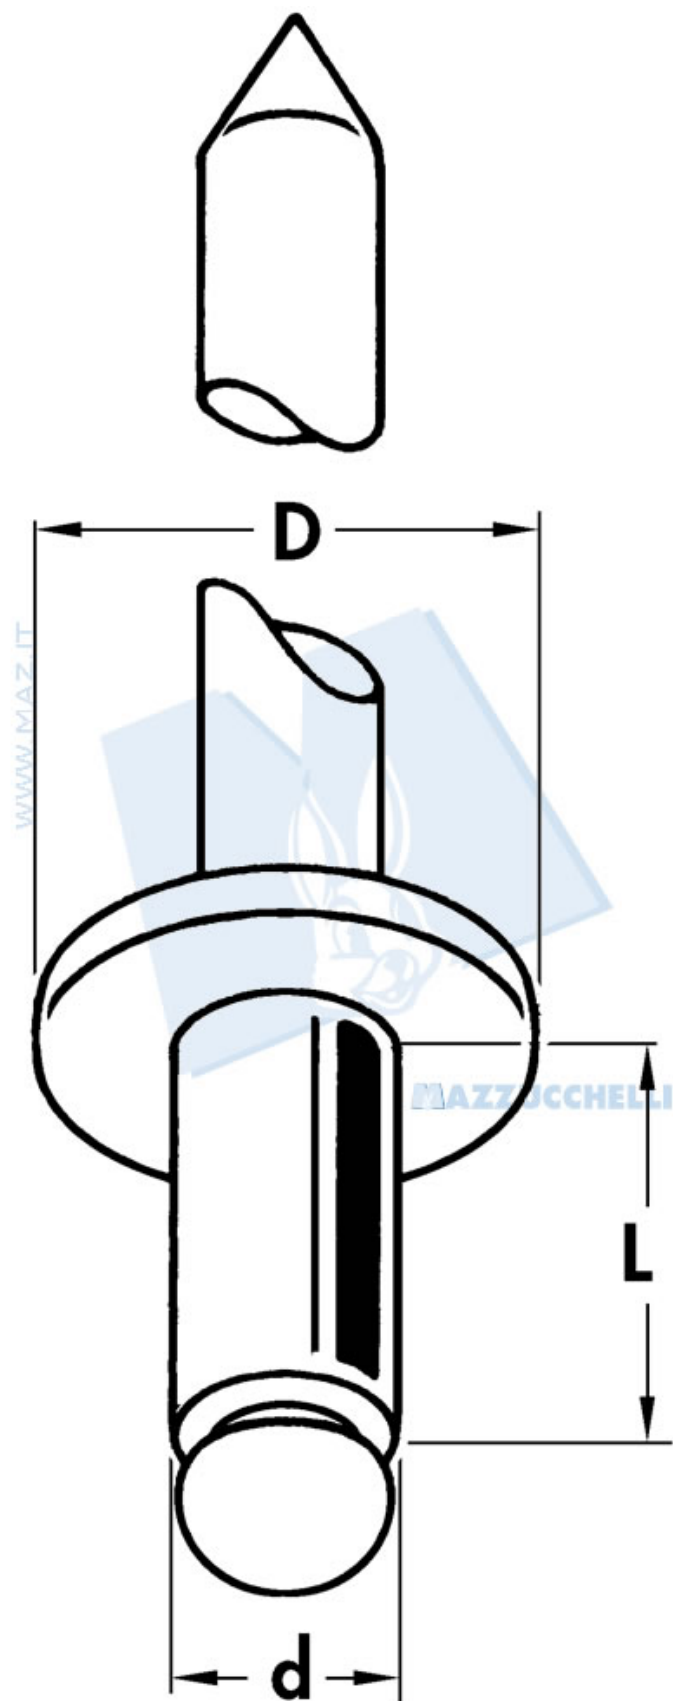


		d	L	D	 mm	 mm min ± max
290 (2842 N)	372 (3645 N)	4.8	6	9	5	0.5 Æ 2
290 (2842 N)	372 (3645 N)	4.8	7	9	5	2 Æ 3
290 (2842 N)	372 (3645 N)	4.8	8	9	5	3 Æ 4
290 (2842 N)	372 (3645 N)	4.8	9	9	5	4 Æ 5
290 (2842 N)	372 (3645 N)	4.8	10	9	5	5 Æ 6
290 (2842 N)	372 (3645 N)	4.8	11	9	5	6 Æ 7
290 (2842 N)	372 (3645 N)	4.8	12	9	5	7 Æ 8

		d	L	D		
290 (2842 N)	372 (3645 N)	4.8	14	9	5	8 Å· 10
290 (2842 N)	372 (3645 N)	4.8	16	9	5	10 Å· 12
290 (2842 N)	372 (3645 N)	4.8	18	9	5	12 Å· 14
290 (2842 N)	372 (3645 N)	4.8	20	9	5	14 Å· 16
290 (2842 N)	372 (3645 N)	4.8	24	9	5	16 Å· 20
290 (2842 N)	372 (3645 N)	4.8	30	9	5	20 Å· 26
495 (4851 N)	581 (5693 N)	6	12	12	6.1	4 Å· 7
495 (4851 N)	581 (5693 N)	6	15	12	6.1	7 Å· 10
495 (4851 N)	581 (5693 N)	6	18	12	6.1	10 Å· 13
495 (4851 N)	581 (5693 N)	6	22	12	6.1	13 Å· 17
495 (4851 N)	581 (5693 N)	6	26	12	6.1	17 Å· 21
495 (4851 N)	581 (5693 N)	6	30	12	6.1	21 Å· 25
527 (5164 N)	663 (6497 N)	6.4	12	12	6.5	4 Å· 7
527 (5164 N)	663 (6497 N)	6.4	15	12	6.5	7 Å· 10
527 (5164 N)	663 (6497 N)	6.4	18	12	6.5	10 Å· 13
527 (5164 N)	663 (6497 N)	6.4	22	12	6.5	13 Å· 17
527 (5164 N)	663 (6497 N)	6.4	26	12	6.5	17 Å· 21
527 (5164 N)	663 (6497 N)	6.4	30	12	6.5	21 Å· 25

articoli di fissaggio > rivetti a strappo in acciaio e ottone > rivetti a strappo in acciaio e ottone

Rivetti in ottone (Cu 63% Zn 37%)

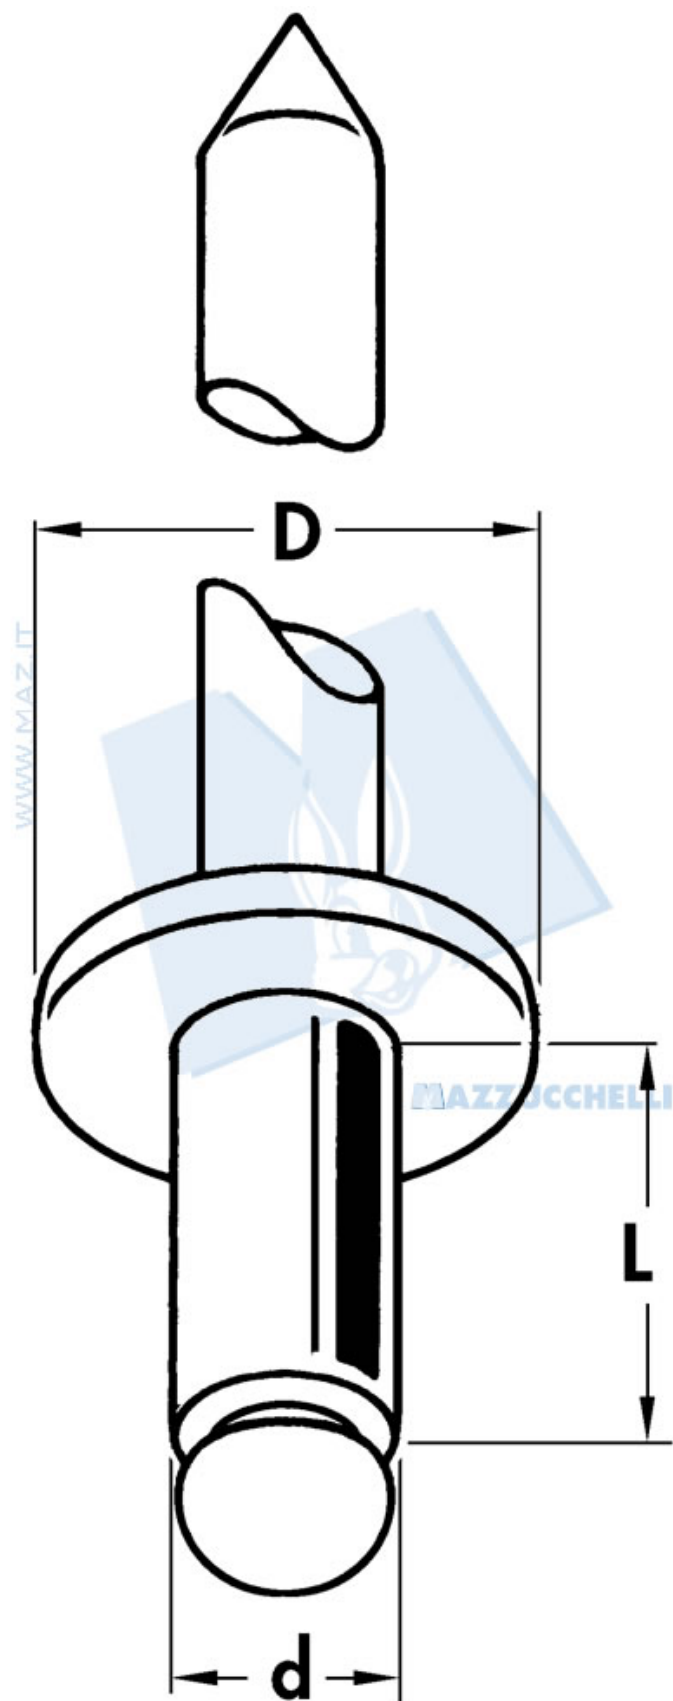

		d	L	D	 mm	 mm min ÷ max
105 (1029 N)	143 (1401 N)	3	6	6	3.1	0.5 Æ 3
105 (1029 N)	143 (1401 N)	3	7	6	3.1	3 Æ 4
105 (1029 N)	143 (1401 N)	3	9	6	3.1	4 Æ 6
105 (1029 N)	143 (1401 N)	3	11	6	3.1	6 Æ 8
190 (1862 N)	255 (2499 N)	4	7	8	4.1	0.5 Æ 3.5
190 (1862 N)	255 (2499 N)	4	9	8	4.1	3.5 Æ 5.5
190 (1862 N)	255 (2499 N)	4	10	8	4.1	5.5 Æ 6.5

		d	L	D	 mm	 mm min ÷ max
190 (1862 N)	255 (2499 N)	4	11	8	4.1	6.5 Æ 7.5
190 (1862 N)	255 (2499 N)	4	12	8	4.1	7.5 Æ 8.5
190 (1862 N)	255 (2499 N)	4	14	8	4.1	8.5 Æ 10.5
190 (1862 N)	255 (2499 N)	4	16	8	4.1	10.5 Æ 12.5
312 (3057 N)	387 (3792 N)	4.8	7	9	5	1 Æ 3
312 (3057 N)	387 (3792 N)	4.8	9	9	5	3 Æ 5
312 (3057 N)	387 (3792 N)	4.8	11	9	5	5 Æ 7
312 (3057 N)	387 (3792 N)	4.8	12	9	5	7 Æ 8
312 (3057 N)	387 (3792 N)	4.8	14	9	5	8 Æ 10
312 (3057 N)	387 (3792 N)	4.8	16	9	5	10 Æ 12
312 (3057 N)	387 (3792 N)	4.8	18	9	5	12 Æ 14
312 (3057 N)	387 (3792 N)	4.8	20	9	5	14 Æ 16
312 (3057 N)	387 (3792 N)	4.8	25	9	5	16 Æ 21
312 (3057 N)	387 (3792 N)	4.8	30	9	5	21 Æ 26